


24x24x16 Stainless Steel Weatherproof Enclosure with 19" Wide Adjustable 8U Rack, Dual Cooling Fans, Single Duplex 120 VAC Power Outlet & Power Cord

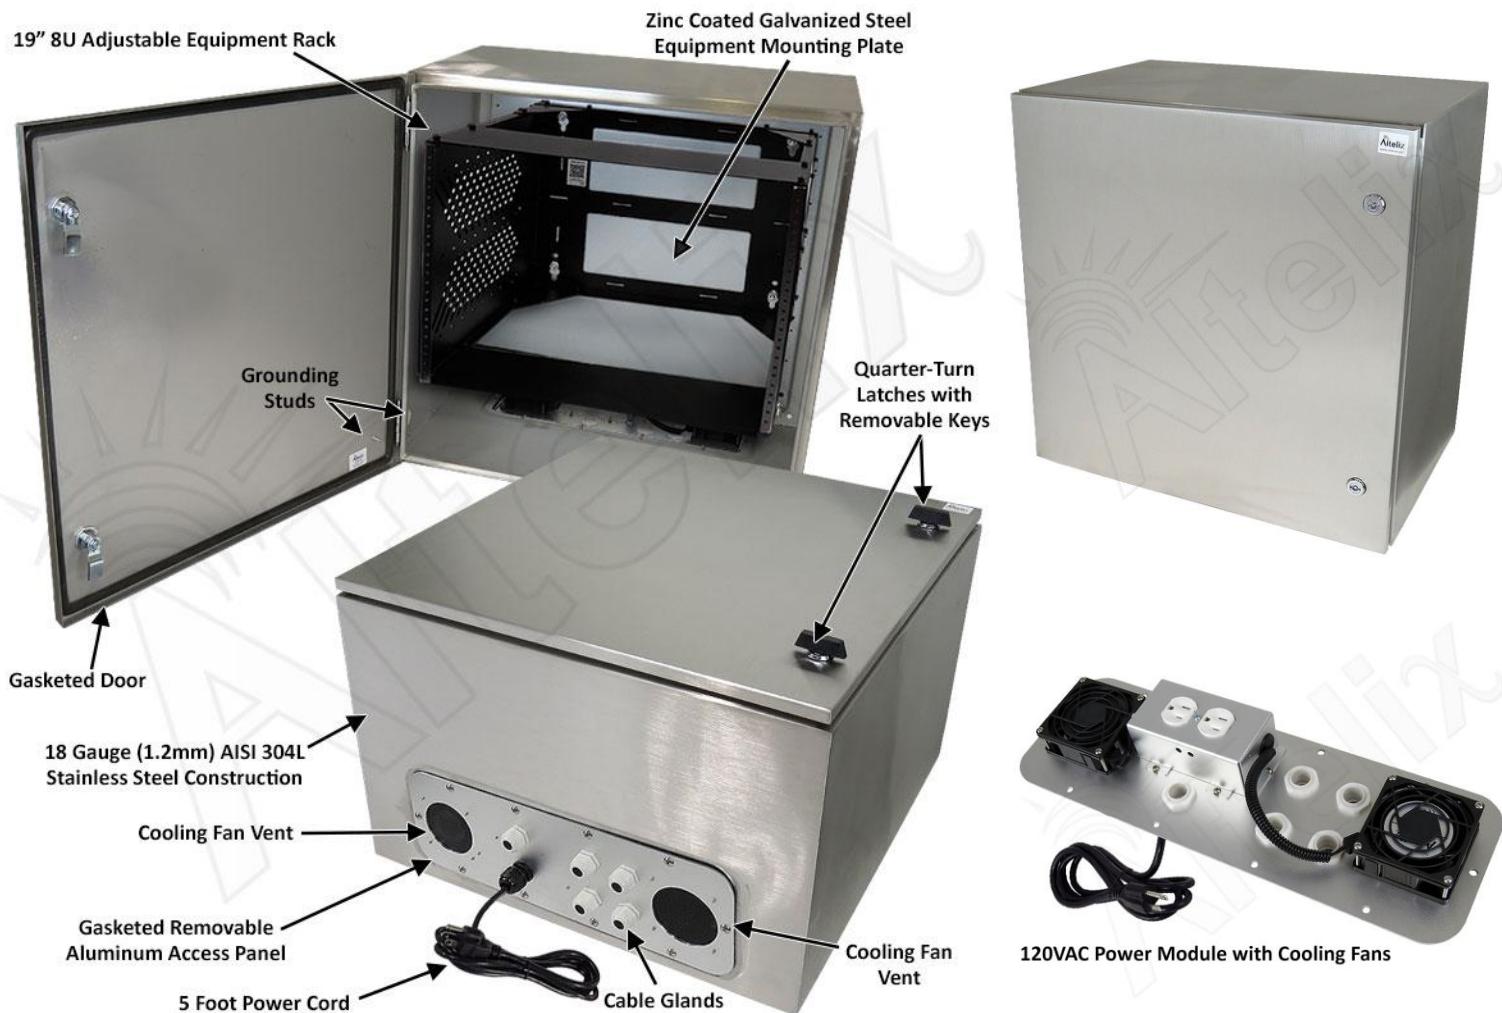

Features

- Dual Thermostat Controlled Cooling Fans
- Removable Power Module with (2) 120VAC Outlets and 5 Ft. Power Cord
- Heavy Duty Continuous Seam Welded 18 Gauge AISI 304L Stainless Steel Construction
- Meets NEMA 3R, 3RX and IP24
- Includes Heavy Duty Steel 19" 8U Rack Frame with Adjustable Depth
- Vented Rack Frame Design Ensures Maximum Air Flow Around Installed Equipment
- Brushed Natural Finish
- Dual Quarter-Turn Door Latches with Removable Keys
- Optional Keyed Lock Set Latch and Padlock Latch Available

Description

Construction and Features - This rugged vented enclosure features continuous seam welded 18 Gauge (1.2mm thick) AISI 304L stainless steel construction. The enclosure door is fully gasketed making this enclosure suitable for use indoors or outdoors. The door features reinforced hinges and dual quarter-turn latches to secure the enclosure. Internal grounding studs are provided on the door and enclosure. Both the enclosure and door feature a brushed natural finish.

Internal 8U 19" Equipment Rack - The NX242416VFA1R2C-R8U features a standard 19" 8U equipment rack frame with adjustable depth. Featuring heavy duty powder coated 15 gauge steel construction, the vented design of this 8U rack frame ensures maximum air flow around installed equipment. The rack frame mounts to a 18 Gauge (1.2mm thick) galvanized steel plate which can also be drilled and modified by the installer to unique site requirements.

Removable Power and Fan Module - The NX242416VFA1R2C-R8U features a removable power and fan module that attaches to the bottom of the enclosure. Constructed of rugged aluminum, this can be easily removed for servicing and is fully gasketed to ensure a proper seal. This power module features a single pre-wired duplex 120VAC power outlet (2 outlets total) and a pre-wired 5 foot power cord, so no additional wiring is required.

Dual Cooling Fans Ventilation - This enclosure features dual thermostat-controlled cooling fans. The low noise, high airflow fans help maintain lower internal temperatures by allowing air to be either pushed or pulled through the enclosure. Both fans are wired internally so they do not require the use of the AC outlets leaving them available for internal equipment use.

Specifications

Material	Continuous Seam Welded 18 Gauge (1.2 mm) AISI 304L Stainless Steel
Color	Natural
Voltage / Max. Load	120VAC / 10A @ 120VAC
Cooling Fans Turn-On Temperature	100°F (38°C)
Cooling Fans Turn-Off Temperature	79°F (26°C)
Outer Dimensions (Height x Width x Depth)	23.6 x 23.6 x 15.7 Inches (600 x 600 x 400 mm)
Inner Dimensions (Height x Width x Depth)	18.0 x 20.0 x 14.1 Inches (457 x 508 x 358 mm)
Rack Frame	19" Width 8U
Rack Frame Weight Capacity	75 lbs (34 kg)
Min. Rack Depth / Max. Rack Depth*	12.3 inch (313.7 mm) / 14" (355.6mm)
Equipment Mounting Plate Material	18 Gauge (1.2 mm) Zinc Coated Galvanized Steel
Weight	67.6 lbs. (30.6 kg)
Power Cord Length	5 Feet (1.5m)
Ratings*	Meets or Exceeds NEMA 3R, 3RX and IP24

*Notes: Rack frame max. depth is based on depth of enclosure.

Altelix LLC USA: 866-660-9434 +1 561-660-9434 sales@altelix.com www.altelix.com

Copyright (C) 2026 Altelix LLC. All rights reserved. Altelix and the Altelix logo are Trademarks and/or Registered Trademarks of Altelix LLC. Specifications are subject to change without notice. See www.altelix.com for most current information.