Think Inside The Box™

Shown with Cover Removed

Features

YoLink® YS7904 Sensor and Cable Not Included

- Designed for the YoLink® Water Level Monitoring Sensor (Model YS7904F-UC) and YoLink® Water Leak Monitoring Sensor (Model YS7904-UC)
- Meets NEMA 1, 2, 4, 4X, 12, 13 and IP65, IP66 for outdoor installations
- Provides protection of sensor from theft or damage
- Small size makes it easy to conceal
- Can be wall mounted or pole mounted with optional adjustable bands
- RF transparent design will not affect LoRa signal range or coverage pattern
- Easy to install

YoLink® is a trademark or registered trademark of YoSmart, Inc.

Description

The Altelix YoLink Sensor Enclosure provides a simple and easy to use solution to mount and secure your YoLink® Water Monitoring Sensors. Designed for harshest environments, the YoLink® sensor enclosure can be wall mounted using the included screws and wall anchors or pole mounted using optional adjustable bands.

Construction and Features

The cover of this enclosure is molded out of UV resistant Polycarbonate + ABS, an industrial grade plastic with greater strength and durability than standard ABS. The enclosure base is constructed from PETG which provides significant chemical resistance and durability, Both the cover and base are fully gasketed and meets or exceeds NEMA 1, 2, 4, 4X, 12, 13 and IEC 529 IP65, IP66. The RF transparent design will not effect LoRa signal range or coverage pattern.
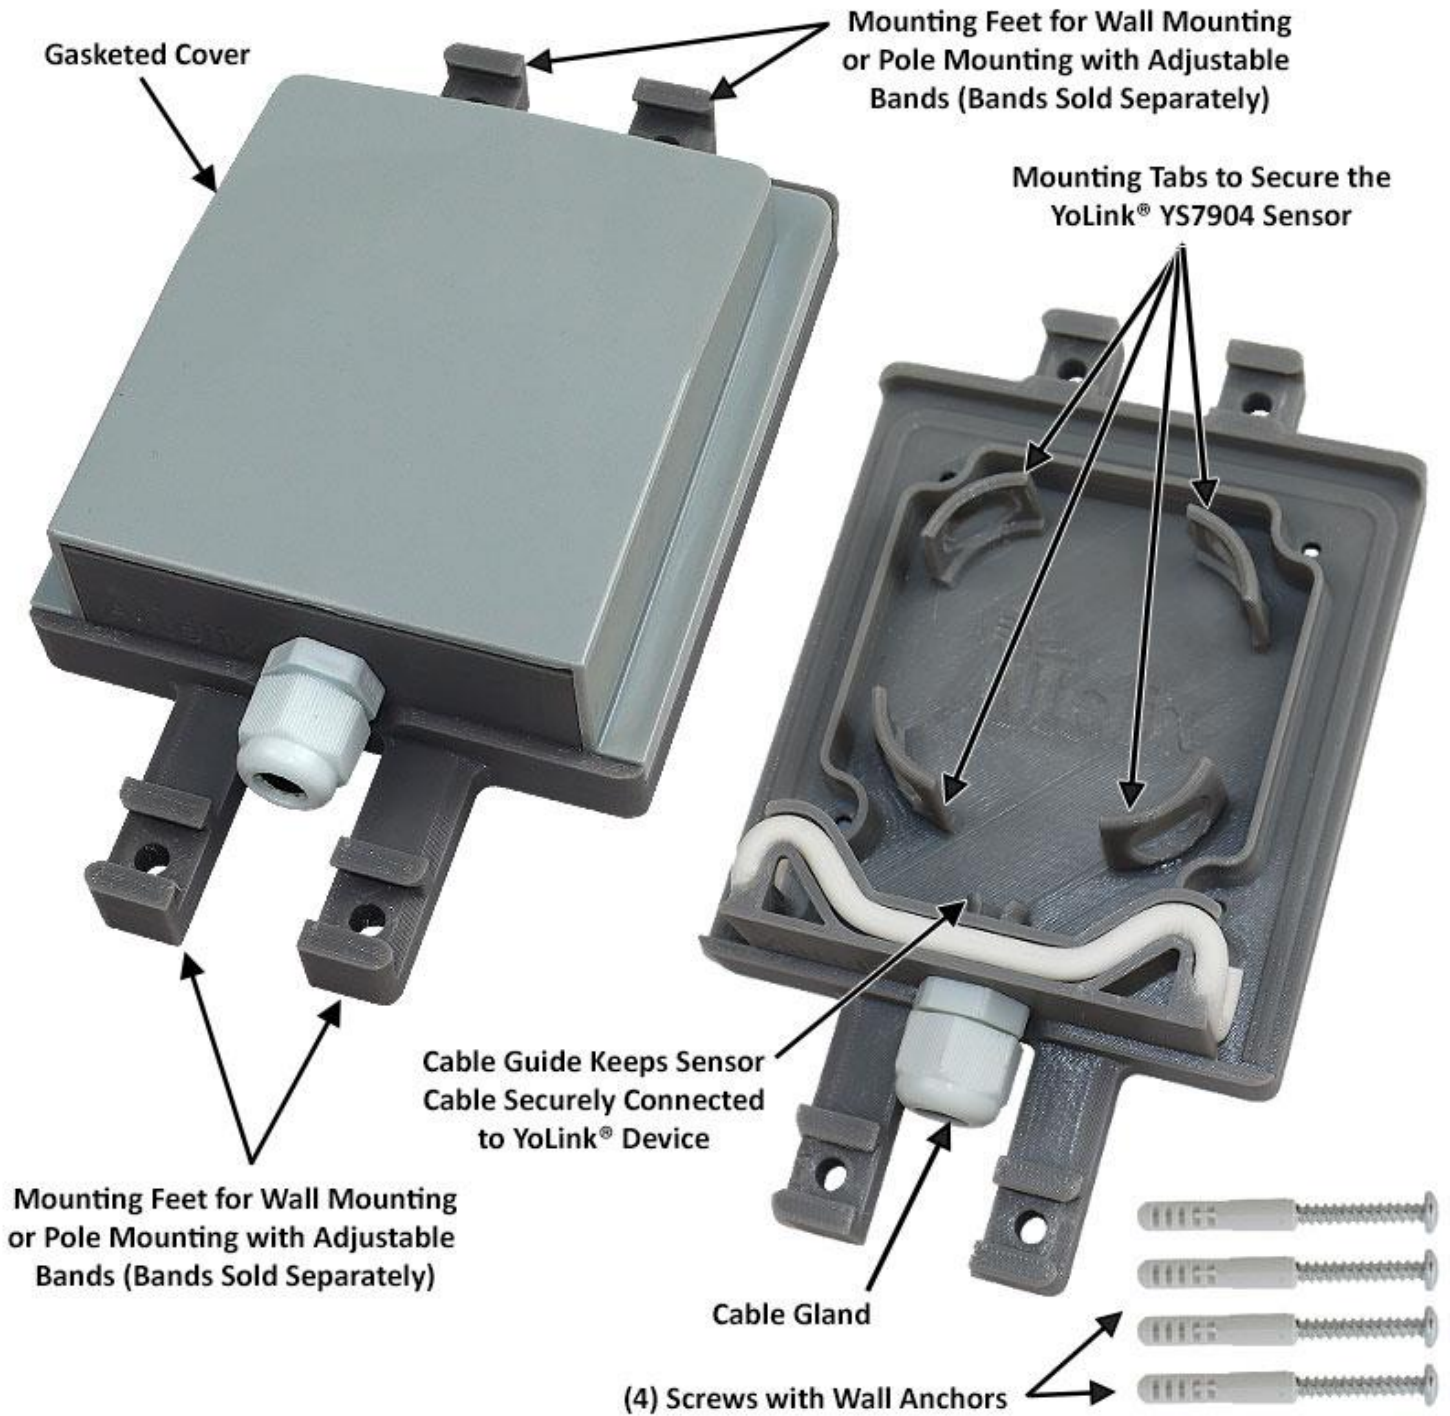
Easy to Use

This enclosure is specifically designed for use with YoLink® Water Monitoring Sensors. Installation is easy, simply insert the YoLink® Sensor into enclosure base. Four mounting tabs keep the sensor securely in place. Run the sensor cable through included cable gland and into the enclosure. An internal cable guide keeps the sensor cable securely connected to the YoLink® Sensor. Attach the gasketed cover using the four screws and gasketed washers. This enclosure is compatible with the following YoLink® Sensors:

- YoLink® Water Level Monitoring Sensor w/Float Switch (model #YS7904F-UC)
- YoLink® Water Level Monitoring Sensor (model #YS7904-UC)
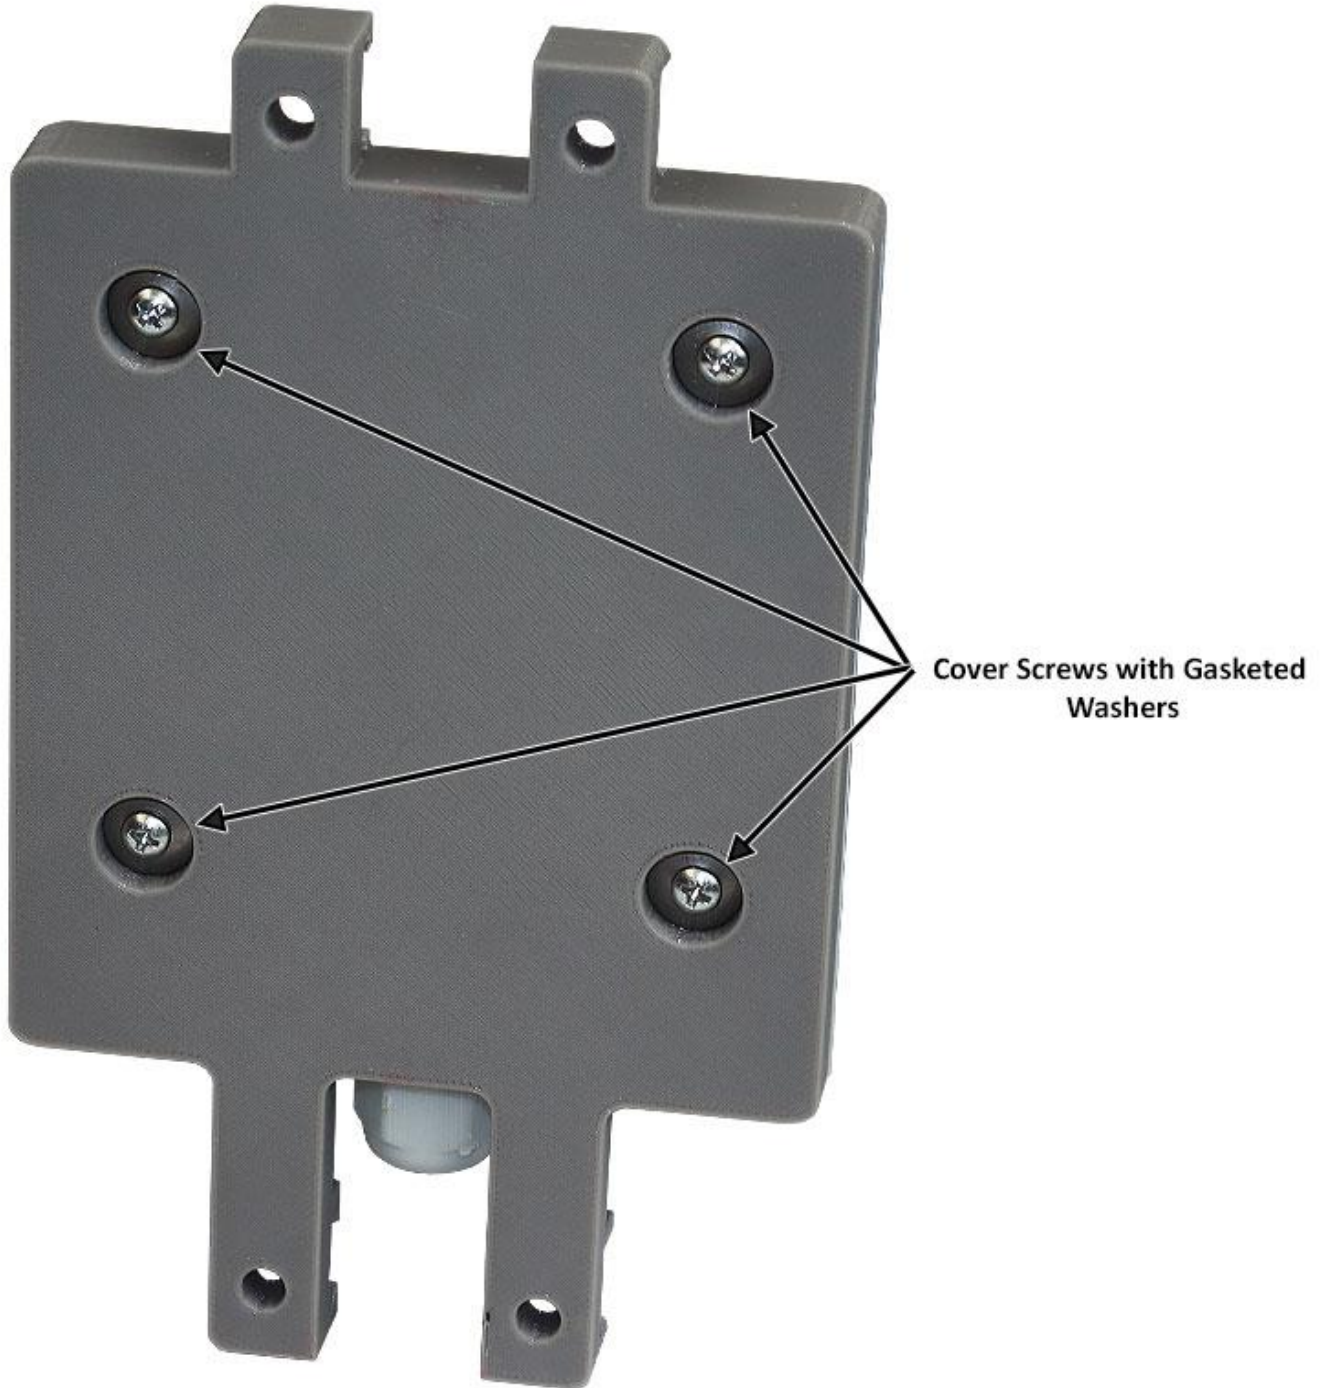- YoLink® Water Leak Sensor 3 (model #YS7904-UC)

Specifications

Material	Polycarbonate / PETG
Color	Gray
Dimensions	4.6 x 7.2 x 1.7 In. (116.8 x 182.8 x 43.1mm)
Included Accessories	(4) Wall Anchors and Screws Cable Gland
Mounting Plate Material	0.25 in (6.4 mm) PVC
Weight	0.4 lbs. (0.2 kg)
Ratings	NEMA 1, 2, 4, 4X, 12, 13, and IP65, IP66
Compatible YoLink® Models	Water Level Monitoring Sensor w/Float Switch (YS7904F-UC) Water Level Monitoring Sensor (YS7904-UC) Water Leak Sensor 3 (YS7904-UC)

Product Photos

Gasketed Cover

Mounting Feet for Wall Mounting or Pole Mounting with Adjustable Bands (Bands Sold Separately)

Mounting Tabs to Secure the YoLink® YS7904 Sensor

Cable Guide Keeps Sensor Cable Securely Connected to YoLink® Device

Mounting Feet for Wall Mounting or Pole Mounting with Adjustable Bands (Bands Sold Separately)

Cable Gland

(4) Screws with Wall Anchors

Altelix LLC USA: 866-660-9434 +1 561-660-9434 sales@altelix.com   www.altelix.com

Product Photos

Cover Screws with Gasketed Washers

Altelix

Product Photos

Shown Pole Mounted with Adjustable Bands
(Sold Separately)