


### 14x12x6 Vented Fiberglass Weatherproof NEMA Enclosure with Blank Aluminum Equipment Mounting Plate

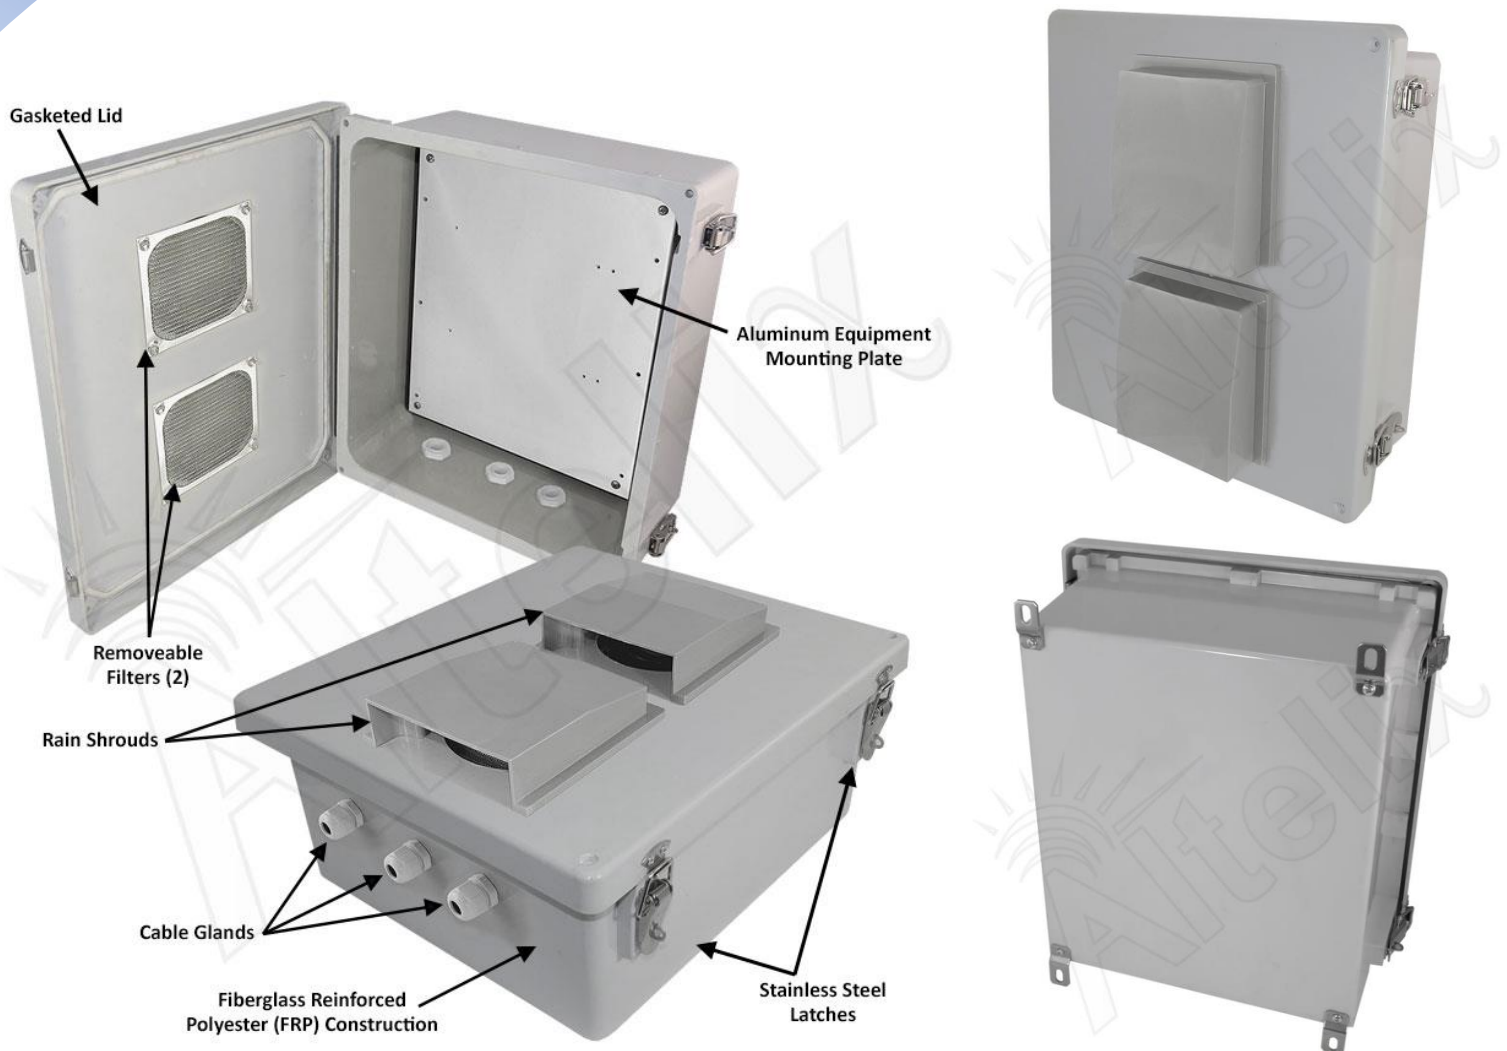

## Features

- Two 4" Vents with Rain Shields and Screens
- Water Resistant JIC Enclosure Design with Gasketed Lid
- Stainless Steel Hinge and Quick Release Latches with Padlock Hasps
- Fiberglass Reinforced Polyester, FRP
- Includes Easy to Drill Blank Aluminum Equipment Mounting Plate
- Weatherproof, UV Stable and Highly Corrosion Resistant
- NEMA 3R, 3RX / IP24 Rated
- Includes Cable Glands and Stainless Steel Mounting Feet
- RF Transparent Enclosure
- Pole Mounting Kit Available

## Description

---

The **Altelix NF141206VP** Vented NEMA Weatherproof Enclosure is ideal for protecting equipment from harsh environments and tampering. This rugged NEMA box is molded from durable and UV resistant fiberglass reinforced polyester (FRP) with a UL94-5V flame rating. It features a gasketed door with stainless steel continuous hinge and stainless steel quick release latches with padlock hasps. The generous size of this enclosure accommodates a wide range of equipment.

This JIC style enclosure is dent-proof, corrosion resistant and UV stable. The FRP material is non-conductive and RF transparent. It is suitable for use in the harshest outdoor environments. It can be drilled and modified by the installer to suit unique site requirements.

**Ventilation** - This enclosure features two 4 inch air vents. Rain shields help prevent rainwater from entering the enclosure.

**Aluminum Equipment Plate** - This model features an easy to drill, aluminum equipment mounting plate. The enclosure and plate can be drilled and modified by the installer to suit unique site requirements.

**Cable Glands** - The enclosure features our unique PG-16 cable glands with a closed inner seal. They are installed in the open ports to maintain the NEMA rating of the enclosure when not in use. When required for use, simply punch a hole through the inner membrane, run your cables and tighten for a water-tight seal.

**Mounting** - Stainless steel brackets are included for secure wall mounting. Optional flange and pole mounting kits are available.

## Specifications

---

<b>Material</b>	Fiberglass Reinforced Polyester
<b>Color</b>	Gray
<b>Outer Dimensions</b>	15.7 x 13.8 x 8.0 Inches (401 x 352 x 205 mm)
<b>Inner Dimensions*</b>	13.0 x 11.0 x 4.9 Inches (330 x 279 x 124 mm)
<b>Weight</b>	10.7 lbs. (4.8 kg)
<b>Mounting Plate Material</b>	0.10 inch (2.5 mm) Aluminum
<b>Mounting Plate Dimensions</b>	10.9 x 12.8 inch (267 x 324 mm)
<b>Ratings</b>	NEMA 3R, 3RX / IP24
<b>Flame Rating</b>	UL94-5V
<b>Industry Certifications</b>	CE

\*Interior dimensions represent maximum space available for equipment.

