


## 14x12x8 Fiberglass Weatherproof Heated NEMA 4X Enclosure with 120 VAC Outlets, Power Cord & 200W Thermostat Controlled Heating System

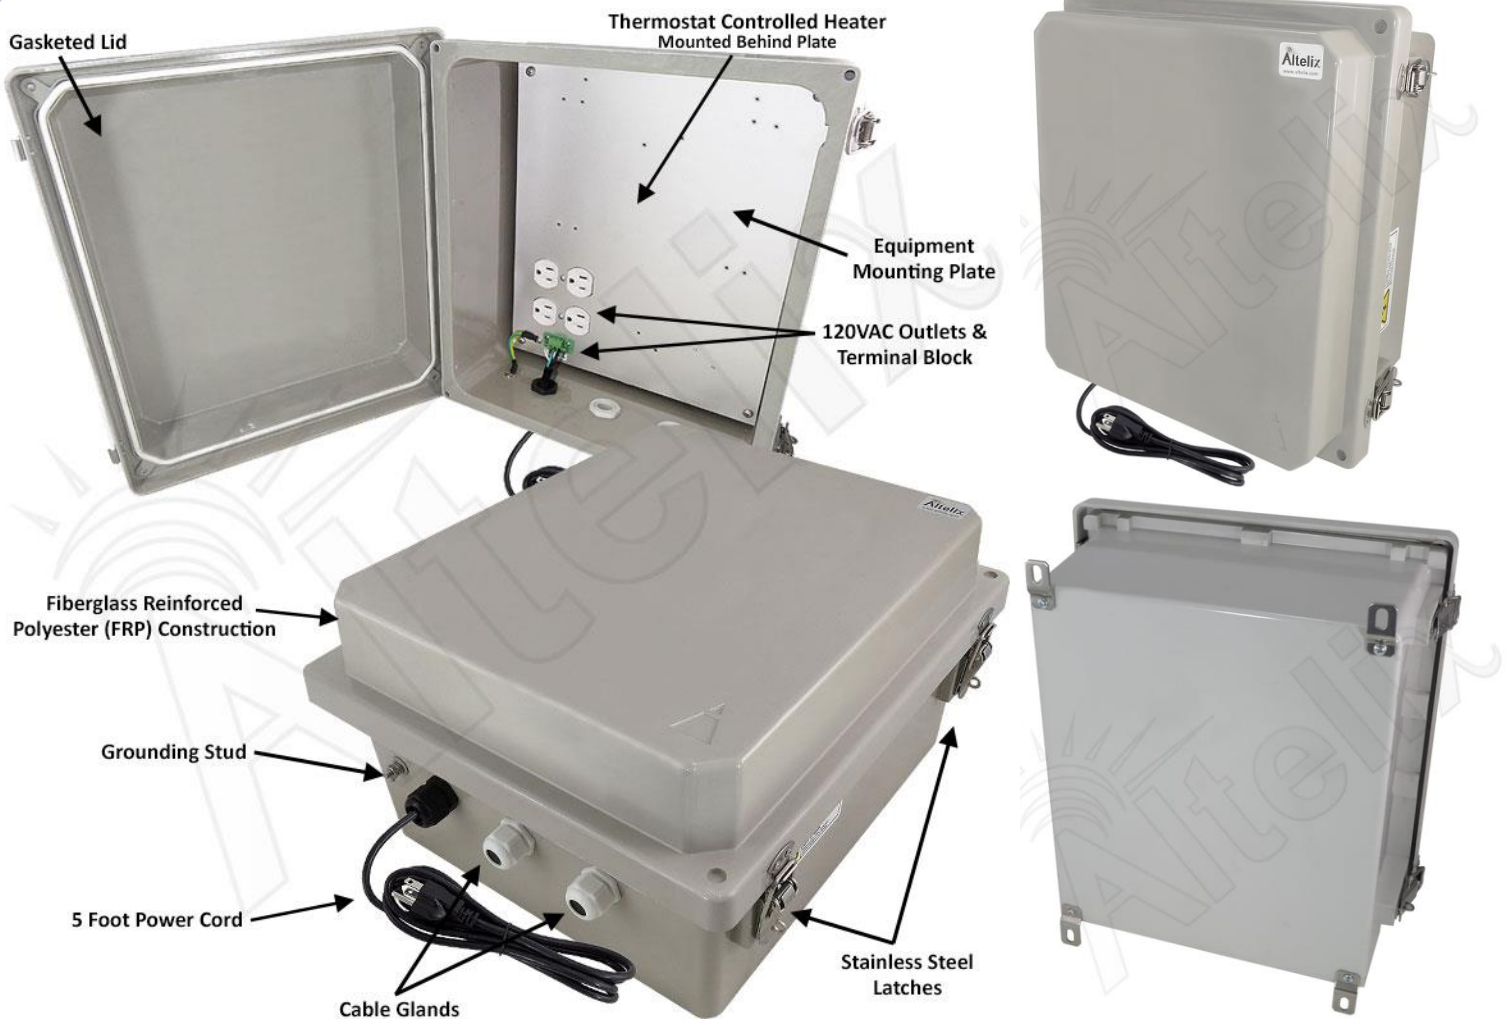

### Features

- Thermostat Controlled 200W Heating System
- No Electrical Wiring Required
- (4) Pre-Wired 120VAC Outlets
- Pre-Wired 5 Foot Power Cord
- Removable 120VAC Terminal Block
- Aluminum Equipment Mounting Plate
- Stainless Steel Hinge and Quick Release Latches with Padlock Hasps
- Fiberglass Reinforced Polyester, FRP
- Weatherproof, UV Stable and Highly Corrosion Resistant
- Meets NEMA 1, 2, 4, 4X, 12, 13 and IP65, IP66
- Includes Cable Glands and Stainless Steel Mounting Feet
- RF Transparent Enclosure
- Pole Mounting Kit Available

## Description

---

The **Altelix NF141208HA1C** Heated NEMA Enclosure is ideal for rapid deployment because no wiring is required. Simply mount the enclosure and plug the pre-wired 5 foot power cord into a nearby outlet. The aluminum equipment mounting plate features four pre-wired 120VAC power outlets for your equipment.

**Get your project up and running quickly** and transition to hard-wired later if needed. The power cord can be easily removed, and the quick-connect terminal block simplifies hard-wiring by a qualified installer.

**200W Thermostat Controlled Heater** - This enclosure is equipped for harsh weather and cold environments. It features a thermostat controlled 200W heating system. The heater turns on when the internal temperature reaches 43°F (6°C) and turns off when it rises to 59°F (15°C). The heater is mounted below the equipment plate and wired internally so leaves the interior space and power outlets available for your equipment.

**Extreme Protection Built to Last** - This rugged JIC style NEMA box is molded from durable UV stable and corrosion resistant fiberglass reinforced polyester (FRP) with a UL94-5V flame rating. The FRP material is dent-proof, non-conductive and RF transparent for compatibility with wireless equipment. It can be easily drilled and modified by the installer as needed. It features a gasketed door with stainless steel continuous hinge and stainless steel quick release latches with padlock hasps. The generous size of this enclosure and the extended lid accommodates a wide range of equipment.

## Specifications

---

<b>Material</b>	Fiberglass Reinforced Polyester
<b>Color</b>	Gray
<b>Voltage</b>	120VAC
<b>Max Load</b>	10A @ 120VAC
<b>Heater Turn-On Temperature</b>	43°F (6°C)
<b>Heater Turn-Off Temperature</b>	59°F (15°C)
<b>Heater Power</b>	200 Watts
<b>Terminal Block Wire Range</b>	12-18 AWG
<b>Terminal Block Wire Strip Length</b>	6-7mm
<b>Outer Dimensions</b>	15.7 x 13.8 x 8.6 Inches (401 x 352 x 218 mm)
<b>Inner Dimensions*</b>	13.0 x 11.0 x 6.7 Inches (330 x 279 x 171 mm)
<b>Mounting Plate Material</b>	0.10 in (2.5 mm) Aluminum
<b>Mounting Plate Dimensions</b>	10.9 x 12.8 in. (276 x 324 mm)
<b>Weight</b>	11.7 lbs. (5.3 kg)
<b>Power Cord Length</b>	5 Feet (1.5m)
<b>Ratings*</b>	NEMA Type 4, 4X / IP66
<b>Flame Rating</b>	UL94-5V

\*Notes

- 1) Enclosure ports must be properly sealed to maintain NEMA Type 4, 4X / IP66 rating.
- 2) See drawing for detailed dimensions of maximum space available for equipment.