


20x16x8 Vented Fiberglass Weatherproof NEMA Enclosure with Dual Cooling Fans, Non-Metallic Equipment Mounting Plate, 120 VAC Outlets & Power Cord

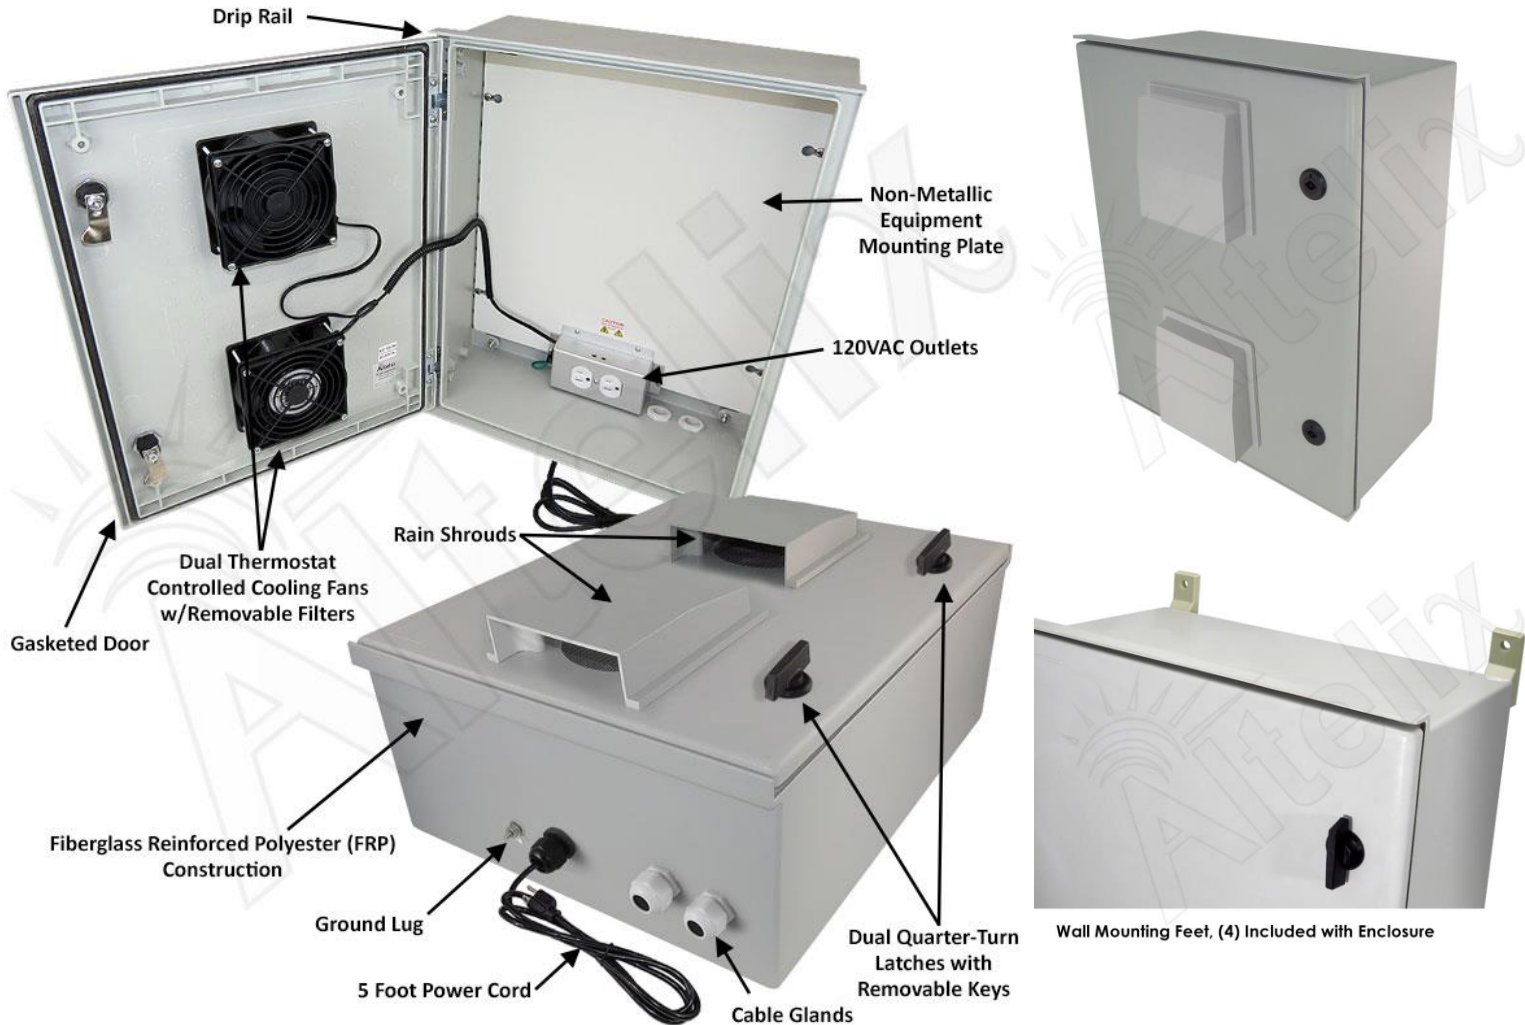

Features

- Dual Thermostat Controlled Cooling Fans with Rain Shields
- Heavy Duty Fiberglass Reinforced Polyester (FRP) Construction
- Includes Non-Metallic Polyester Equipment Mounting Plate
- (2) Pre-Wired 120VAC Power Outlets
- Pre-Wired 5 Foot Power Cord
- Dual Quarter-Turn Door Latches with Removable Keys
- (4) Mounting Feet Included
- NEMA Type 3R, 3RX / IP24 Rated
- Optional Lockable Latch Sets Available

Description

The **Altelix NFC201608VMFA1C** enclosure is molded from durable and UV resistant fiberglass reinforced polyester (FRP). The door is fully gasketed making this enclosure suitable for use indoors or outdoors. The lockable door features reinforced hinges and dual quarter-turn latches to secure the enclosure and is locked and unlocked using the included removable keys. A drip rail over the door provides additional protection against water dripping into the cabinet while the enclosure is wet.

RF Transparent Design - The NFC201608VMFA1C is ideal for WiFi applications. The non-metallic design of both the enclosure and equipment mounting plate will not interfere with the radio's operation. In addition, mounting radios to polyester equipment mounting plate can be done simply by using self-tapping screws.

120VAC Power - Two pre-wired 120VAC power outlets are provided inside the enclosure to power equipment. A 5 foot pre-wired power cord is included to provide power to the internal 120VAC outlets, so no additional wiring is required. Simply mount the enclosure then plug the power cord into a 120VAC outlet.

Dual Cooling Fans Ventilation - This enclosure features 4" vents with dual thermostat-controlled cooling fans. The low noise, high airflow fans help maintain lower internal temperatures by allowing air to be either pushed or pulled through the enclosure. Both fans are wired internally so they do not require the use of the AC outlets leaving them available for internal equipment use. Rain shrouds on the front door keep rainwater from entering the enclosure.

Mounting - Four mounting feet are included so that the enclosure can be securely mounted to a wall or other structure. Optional flange and pole mounting kits are available.

Specifications

Material	Fiberglass Reinforced Polyester
Color	Light Gray
Voltage / Max. Load	120VAC
Max. Load	10A @ 120VAC
Outer Dimensions (Height x Width x Depth)	19.7 x 15.8 x 9.4 Inches (500 x 402 x 239 mm)
Inner Dimensions* (Height x Width x Depth)	14.2 x 14.2 x 5.0 Inches (362 x 362 x 127 mm)
Cooling Fans Turn-On Temperature	100°F (38°C)
Cooling Fans Turn-Off Temperature	79°F (26°C)
Equipment Plate Material	0.12 inch (3.0 mm) White Polyester
Power Cord Length	5 Feet (1.5M)
Weight	15.3 lbs. (6.9 kg)
Ratings	NEMA Type 3R, 3RX / IP24

*Interior dimensions represent maximum space available for equipment.