

## Features

- Heavy Duty Fiberglass Reinforced Polyester (FRP) Construction
- Includes 19" 4U Vertical Rack Frame and Galvanized Steel Equipment Mounting Plate
- Multiple Rack Frame Mounting Locations to Accommodate Various Size Equipment
- Dual Quarter-Turn Door Latches with Removable Keys
- (4) Mounting Feet Included
- NEMA Type 3, 3X / IP65 Rated
- Optional Lockable Latch Sets Available
- Optional Equipment Mounting Plates and Pole Mount Kits Available

## Description

The **Altelix NFC322412P-RV4U** NEMA 3X / IP65 rated enclosure is molded from durable and UV resistant fiberglass reinforced polyester (FRP). The door is fully gasketed making this enclosure suitable for use indoors or outdoors. The lockable door features reinforced hinges and dual quarter-turn latches to secure the enclosure and is locked and unlocked using the included removable keys. A drip rail over the door provides additional protection against water dripping into the cabinet while the enclosure is wet.

**Internal 4U 19" Vertical Equipment Rack** - The NFC322412P-RV4U features a standard 19" 4U vertical equipment rack. It is designed to accommodate a wide range of equipment such as network switches, rack mount audio/video equipment and most other rack mountable equipment. The rack frame mounts to a 16 Gauge (1.5mm thick) galvanized steel plate which can also be drilled and modified by the installer to unique site requirements. Multiple mounting positions for the rack are provided to accommodate a wide range of equipment sizes.

**Installation Note:** The max. depth of the 4U rack is 28.2" (717.55mm). Before ordering, please check the dimensions of the equipment to be installed to ensure proper fit.


**Mounting** - Four mounting feet are included so that the enclosure can be securely mounted to a wall or other structure. Optional flange and pole mounting kits are available.

**Optional Lockable Latches** - For additional protection of internal equipment installed, optional keyed latch sets are available. These optional lockable latches are direct replacements for the standard quarter-turn latches that come pre-installed in the enclosure.

## Specifications

<b>Material</b>	Fiberglass Reinforced Polyester
<b>Color</b>	Light Gray
<b>Outer Dimensions</b> (Height x Width x Depth)	31.5 x 23.6 x 11.8 Inches (802 x 600 x 300 mm)
<b>Inner Dimensions*</b> (Height x Width x Depth)	28.0 x 21.3 x 10.0 Inches (711 x 540 x 254 mm)
<b>Rack Frame</b>	19" Wide 4U Vertical Mount
<b>Rack Frame Weight Rating</b>	75 lbs. (34kg)
<b>Equipment Plate Material</b>	16 Gauge Galvanized Steel
<b>Equipment Plate Dimensions</b>	21.3 x 29.5 In. (540 x 749 mm)
<b>Weight</b>	40.1 lbs. (18.2 kg)
<b>Ratings</b>	NEMA Type 3, 3X / IP65

\*Interior dimensions represent maximum space available for equipment.

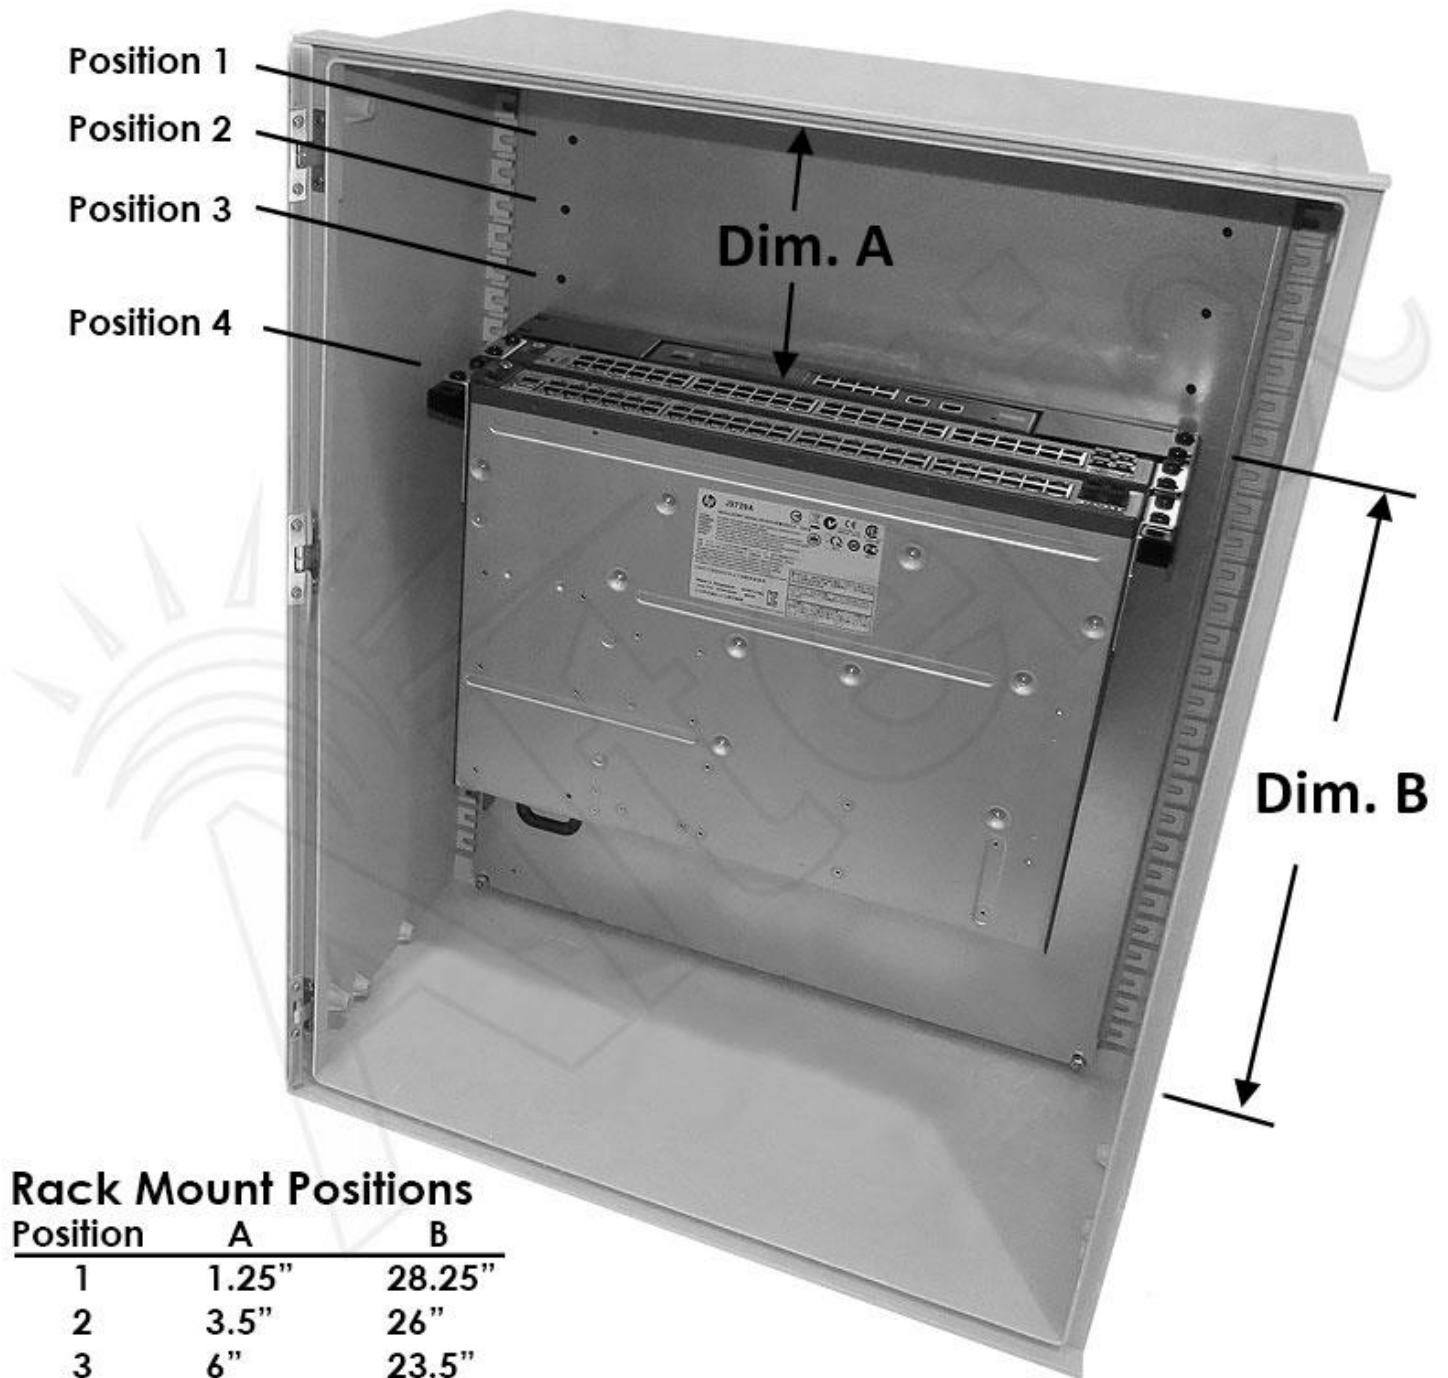

### Rack Mount Positions

Position	A	B
1	1.25"	28.25"
2	3.5"	26"
3	6"	23.5"
4	8.25"	21.25"

Rack mounted equipment shown for reference. Not included.