


12x9x7 NEMA 4X Polycarbonate + ABS Weatherproof Enclosure

NP120907

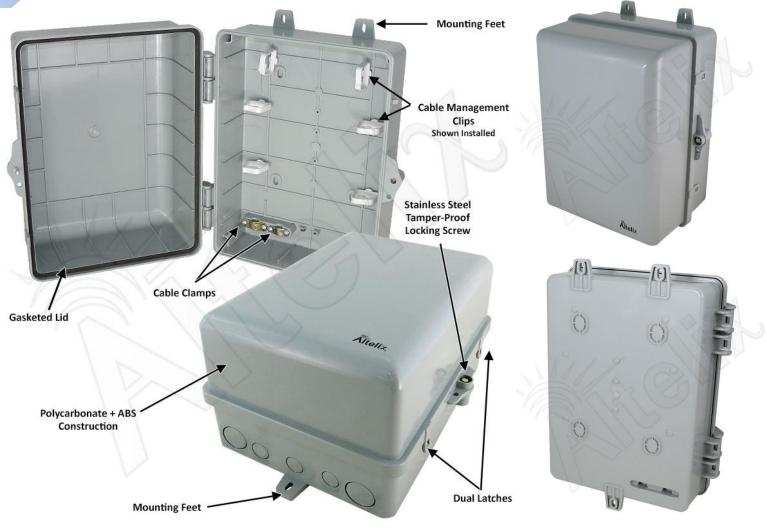

Features

- Meets NEMA 1, 2, 4, 4X, 12, 13 and IEC 529 IP65, IP66
- Weatherproof and UV Stable
- Durable Polycarbonate + ABS
- RF Transparent for Wireless Devices
- Extra Deep Gasketed Lid with Dual Latches
- Tamper-Proof Locking Screw with Key and Provision for Padlock
- Integral Mounting Feet
- Includes Wall Mounting Hardware, Cable Grommets, Zip Ties, Cable Management
 Loops
- Optional Pole Mount Kit Available



Description

Weatherproof Polycarbonate + ABS Construction for Extreme Durability

The **Altelix NP120907** Plastic Utility Enclosure is an industrial quality general purpose weatherproof utility box designed to offer extreme protection for wiring, electronics and wireless devices in harsh environments. It features an extra deep lid providing additional depth.

Construction and Features

This enclosure is molded out of UV resistant Polycarbonate + ABS, an industrial grade plastic with greater strength and durability than standard ABS. It features a gasketed hinged door with dual latches, a stainless steel security screw and provision for padlock. Integrated mounting feet simplify installation. It meets or exceeds NEMA 1, 2, 4, 4X, 12, 13 and IEC 529 IP65, IP66.

Complete with Cable Grommets and Wire Management Accessories

For convenience, the included accessory kit contains cable grommets, wall anchors, zip ties, hook-and-loop wire management straps, plastic wire management loops, door locking key and more.

Pole Mount Available

A pole mounting kit is also available for this enclosure. Attaches to the rear of the enclosure, it allows it to be mounted to poles and fence posts up to 9.5 inches in diameter.

Specifications

Material	Polycarbonate + ABS
Color	Gray (Additional colors available – see Altelix.com)
Outer Dimensions (Height x Width x Depth)	13.1 x 10.2 x 6.8 Inches (334 x 259 x 171 mm)
Inner Dimensions* (Height x Width x Depth)	9.4 x 7.5 x 5.9 Inches (239 x 190 x 149 mm)
Weight	1.9 lbs. (0.9 kg)
Ratings	Meets or Exceeds NEMA 1, 2, 4, 4X, 12, 13 and IEC 529 IP65, IP66
Flame Rating	Meets UL94-V0

*Interior dimensions represent maximum space available for equipment.