
## NP120907A1C



12x9x7 NEMA 4X Polycarbonate + ABS Weatherproof Enclosure with Equipment Mounting Plate, 120VAC Outlet & Power Cord

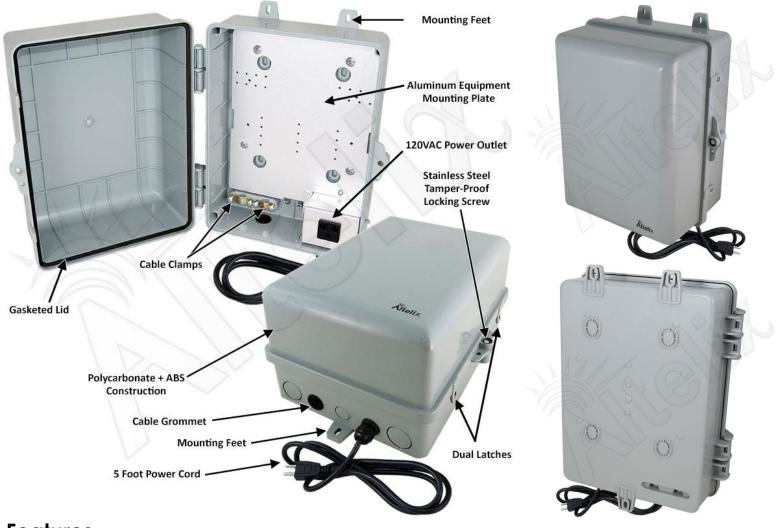

## **Features**

- Features a 1.5mm Thick Finished Aluminum Equipment Mounting Plate with a 120VAC Power Outlet
- Prewired 5 Foot Power Cord
- Meets NEMA 1, 2, 4, 4X, 12, 13 and IEC 529 IP65, IP66
- Weatherproof and UV Stable Durable Polycarbonate + ABS
- RF Transparent for Wireless Devices
- Extra Deep Gasketed Lid with Dual Latches, Tamper-Proof Locking Screw with Key and Provision for Padlock
- Integral Mounting Feet
- Includes Wall Mounting Hardware, Cable Grommets, Zip Ties, Cable Management Loops
- Optional Pole Mount Kit Available



## Description

The **Altelix NP120907A1C** Plastic Utility Enclosure is an industrial quality general purpose weatherproof utility box designed to offer extreme protection for wiring, electronics and wireless devices in harsh environments. It features an extra deep lid providing additional depth.

**Construction and Features -** This enclosure is molded out of UV resistant Polycarbonate + ABS, an industrial grade plastic with greater strength and durability than standard ABS. It features a gasketed hinged door with dual latches, a stainless steel security screw and provision for padlock. Integrated mounting feet simplify installation. It meets or exceeds NEMA 1, 2, 4, 4X, 12, 13 and IEC 529 IP65, IP66.

**Power** - This configuration consists of the PC+ABS NEMA enclosure with hinged lid and a 1.5mm thick aluminum plate with a 120VAC power outlet. A 5 foot pre-wired power cord is included to power the enclosure, so no additional wiring is required. A cable grommet on the enclosure allows cables to be connected to internal devices. Knock-outs are also provided on the enclosure for additional wiring. Extra cable grommets and cable glands are included with the accessory kit.

**Complete with Cable Grommets, Cable Glands and Wire Management Accessories -** For convenience, the included accessory kit contains wall anchors, zip ties, hook-and-loop wire management straps, door locking key and more.

**Pole Mount Available -** A pole mounting kit is also available for this enclosure. Attaches to the rear of the enclosure, it allows it to be mounted to poles and fence posts up to 9.5 inches in diameter.

## **Specifications**

Material	Polycarbonate + ABS
Color	Gray (Additional colors available – see Altelix.com)
Voltage / Max Load	120VAC / 10A @ 120VAC
Outer Dimensions (Height x Width x Depth)	13.1 x 10.2 x 6.8 Inches (334 x 259 x 171 mm)
Inner Dimensions* (Height x Width x Depth)	8.5 x 7.5 x 5.8 Inches (216 x 190 x 147 mm)
Mounting Plate Material	0.06 in. (1.5 mm) Aluminum
Weight	4.0 lbs. (1.8 kg)
Power Cord Length	5 Feet (1.5m)
Ratings	Meets or Exceeds NEMA 1, 2, 4, 4X, 12, 13 and IEC 529 IP65, IP66
Flame Rating	Meets UL94-V0

\*Interior dimensions represent maximum space available for equipment.

Altelix LLC USA: 866-660-9434 +1 561-660-9434 <u>sales@altelix.com</u> <u>www.altelix.com</u> Copyright (C) 2021 Altelix LLC. All rights reserved. Altelix and the Altelix logo are Trademarks and/or Registered Trademarks of Altelix LLC. Specifications are subject to change without notice. See <u>www.altelix.com</u> for most current information.