

NP120907WY Shown

Features

- Transparent polycarbonate window in lid provides visibility to installed equipment while enclosure is closed
- Gasketed lid with dual stainless steel latches
- Raised mounting bosses in the base for use with equipment mounting plates & DIN rail kits
- Available with or without aluminum or PVC equipment mounting plates
- Durable Polycarbonate + ABS construction, weatherproof and UV stable
- Meets NEMA 1, 2, 4, 4X, 12, 13 and IEC 529 IP65, IP66
- Tamper-Proof locking screw with key and provision for padlock
- Can be mounted using external mounting feet or internal mounting feet
- RF transparent for wireless devices
- Includes (2) locking keys, cable grommets, cable glands, zip ties, hook-n-loop tape and wall mounting hardware

Description

Polycarbonate Viewing Window - This enclosure features a 4x6 inch viewing window installed in the lid which allows visibility to installed equipment while the enclosure lid is close. The operational status of installed equipment can easily be confirmed since indicator lights can be viewed without opening the enclosure. This enclosure is also ideal for protecting security cameras from theft or damage. Constructed from transparent polycarbonate, this viewing window is UV resistant and will not yellow. A silicone gasket ensures the enclosure meets its NEMA 4X rating.

Equipment Mounting Options - This enclosure provides multiple ways to install equipment. Raised bosses located in the base of this enclosure can be used to mount an equipment plate. These same bosses can also be used to install Altelix's 35mm Top Hat DIN Rail kits (sold separately). Up to (5) DIN Rail kits can be installed into the enclosure base. This provides greater versatility when mounting equipment inside the enclosure. A large flat section in the base is also provided for use with the hook-n-loop tape included in the accessory kit.

In addition to the raised bosses this enclosure can be purchased with either an **Aluminum** or **Non-Metallic PVC** equipment mounting plates. The 1.5mm thick aluminum equipment mounting plate can be easily drilled and modified by the installer. Ideal for wireless applications, the RF transparent 10mm thick PVC equipment mounting plate features a No-Drill design. Mounting radios and other equipment can be easily done simply by using self-tapping screws.

RF Transparent Design - The NP120907WY is ideal for WiFi applications. The non-metallic design of the enclosure will not interfere with the radio's operation. The size of this enclosure will fit a wide range of popular wireless access points on the market.


Secure Your Equipment - These NP series enclosures feature a gasketed lid with dual stainless steel quick release latches. A stainless steel security screw with keys and a provision for a padlock are also provided.

Polycarbonate + ABS Protection Built to Last - This enclosure is molded out of UV resistant Polycarbonate + ABS, an industrial grade plastic with greater strength and durability than standard ABS. This enclosure can be easily drilled and modified by the installer to suit unique site requirements. It meets or exceeds NEMA 1, 2, 4, 4X, 12, 13 and IEC 529 IP65, IP66.


Complete with Cable Grommets and Wire Management Accessories - This enclosure includes an assortment of cable grommets and cable glands that can be installed in the knock-out holes for a weather resistant seal. Also included in the accessory kit are wall anchors, zip ties, wire management loops, hook-n-loop tape, ground wire, (2) door locking keys and more.

Multiple Mounting Options - This enclosure features (4) external mounting feet which can be used for wall mounting or with our optional pole mounting kit. Mounting points are also provided inside the enclosure. These can be easily drilled out and used for applications requiring a more secure installation.


Product Photos

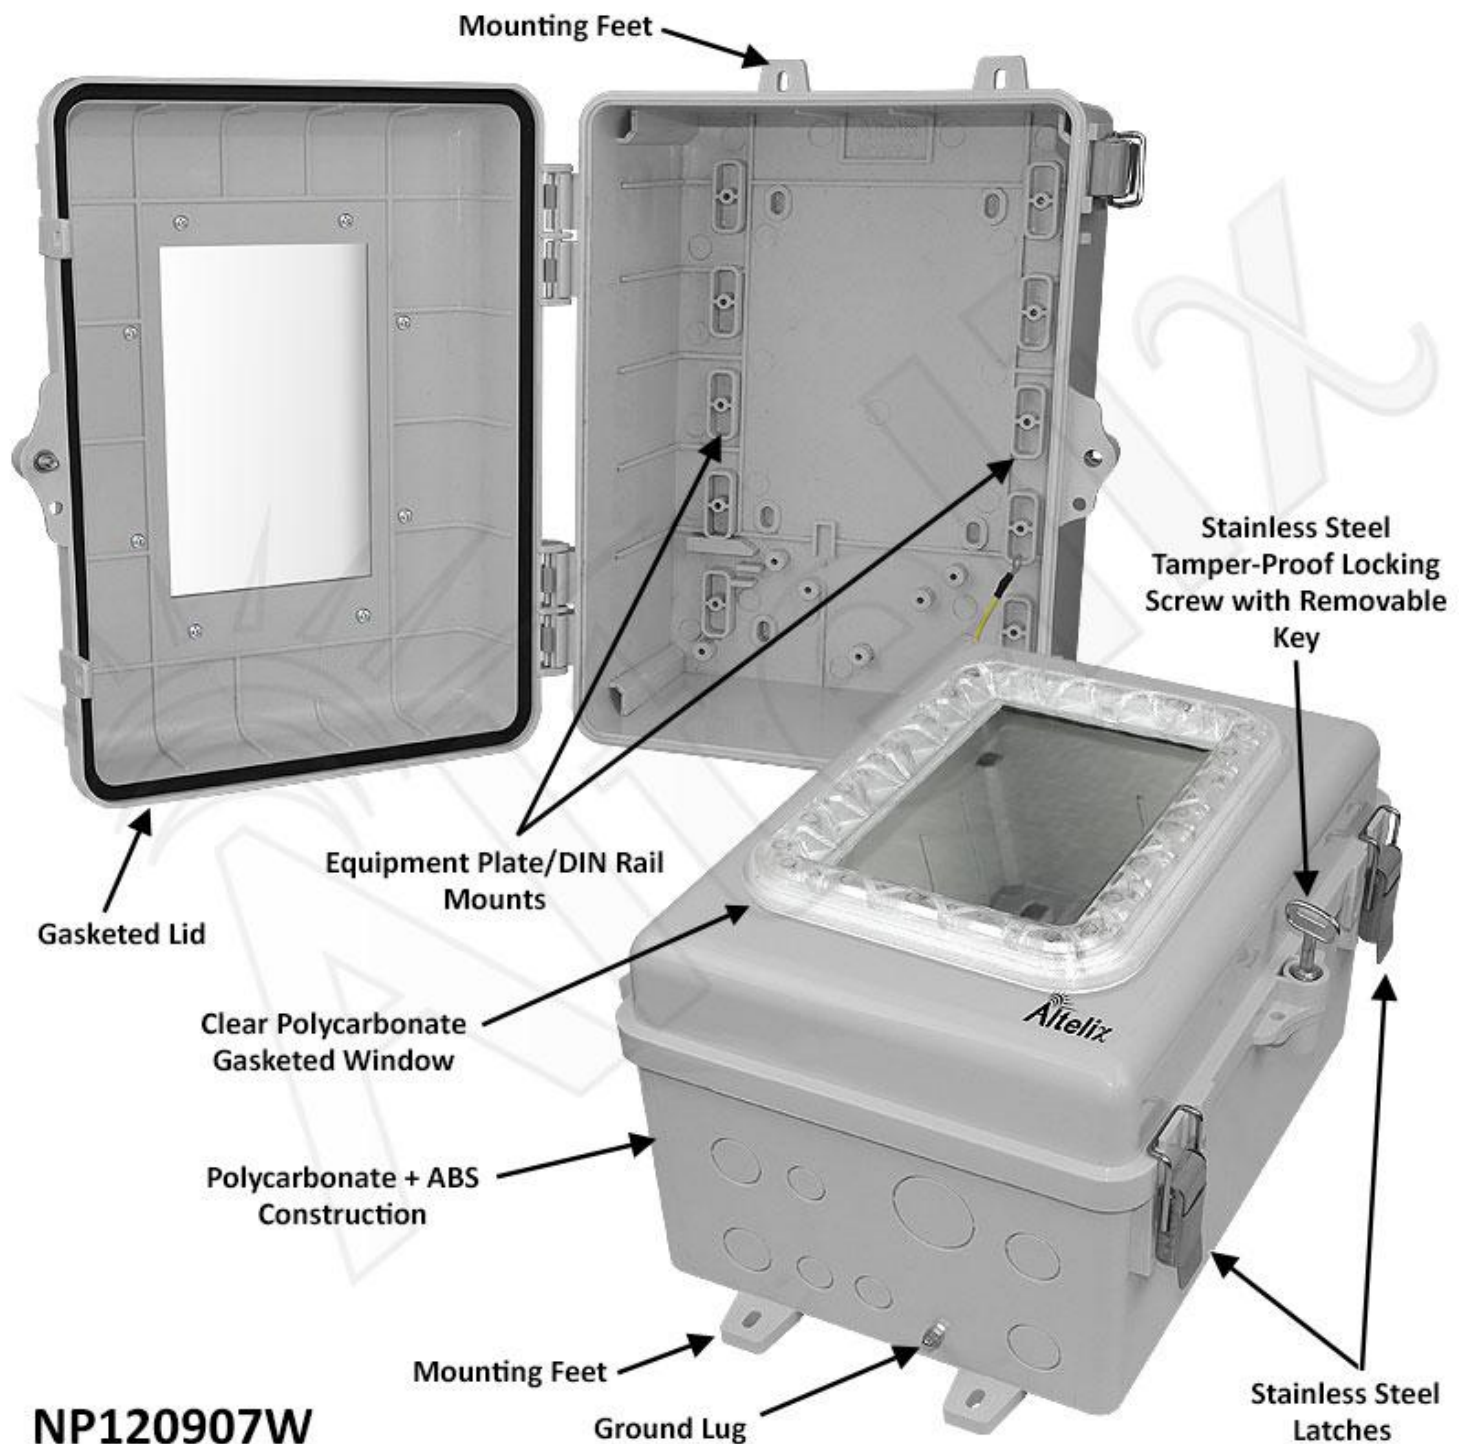

Product Photos

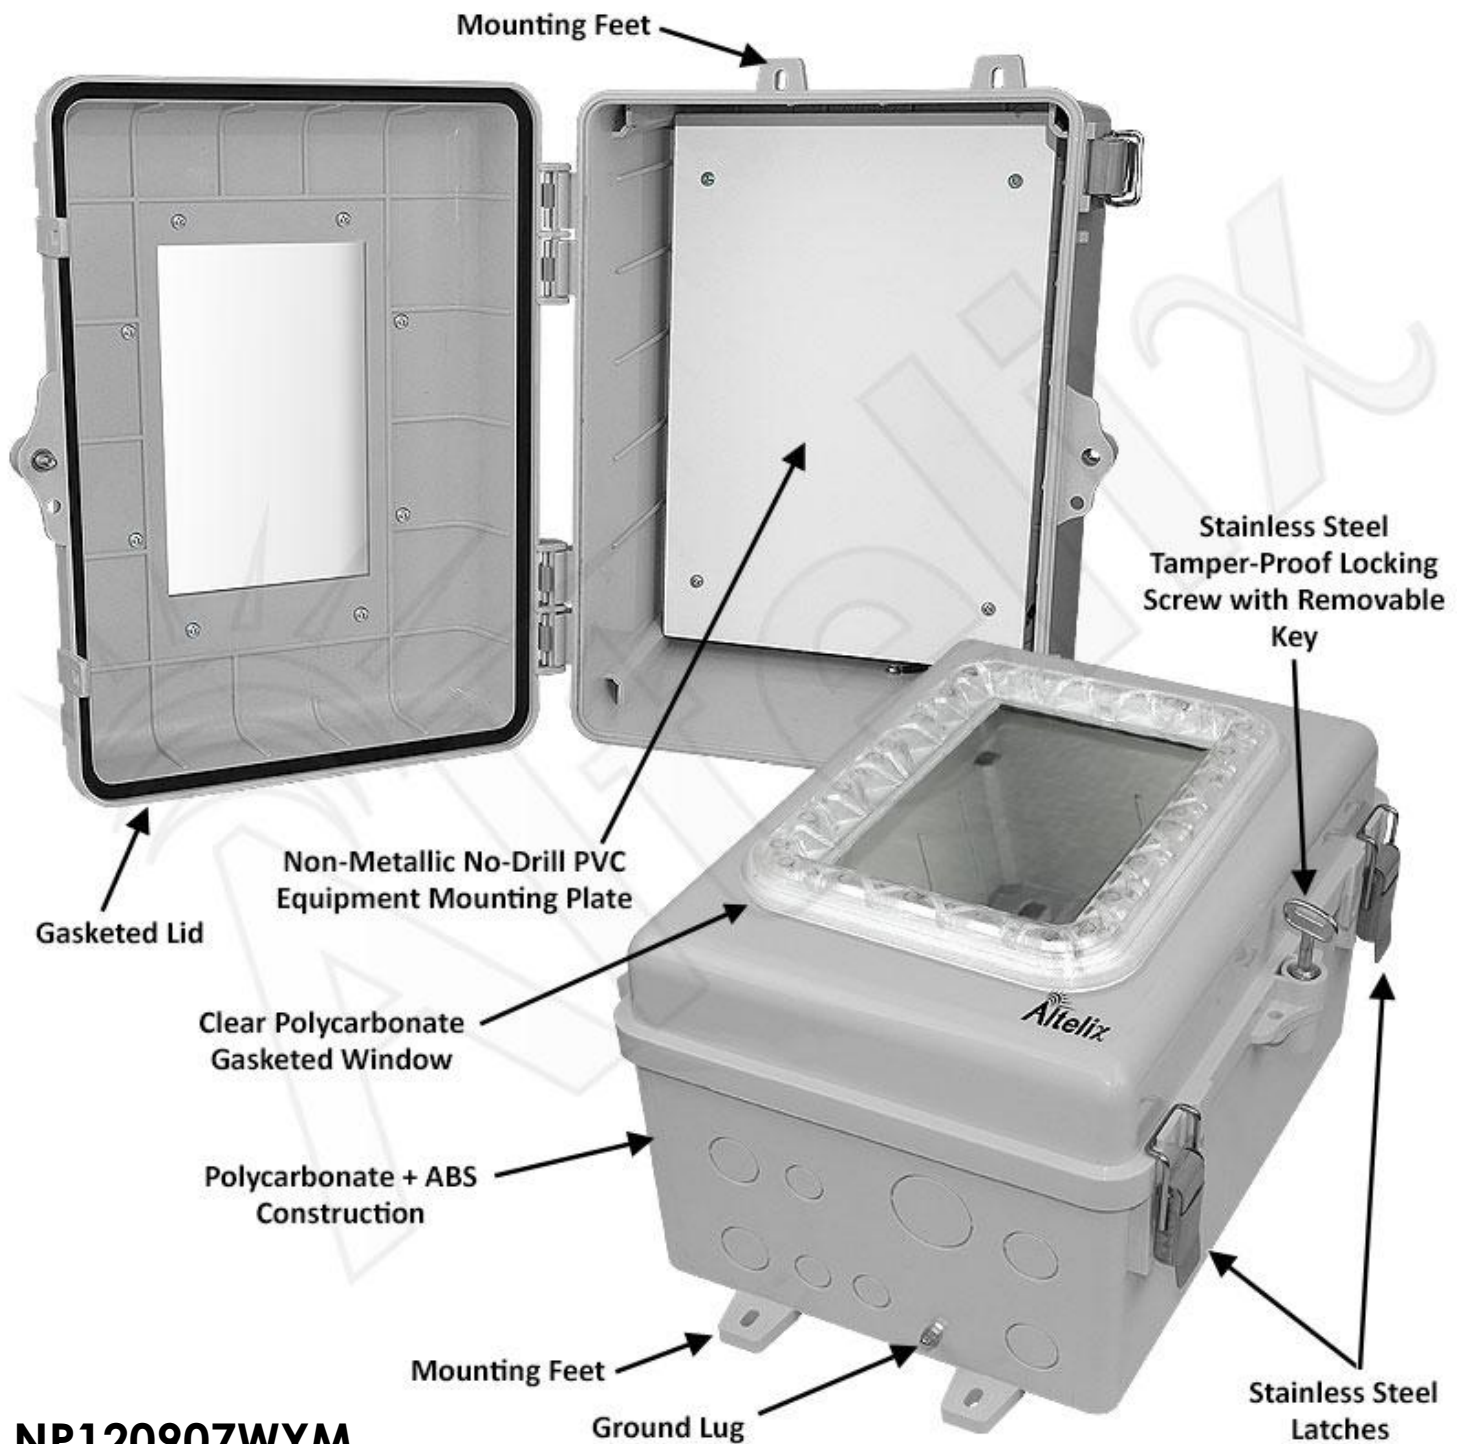

Product Photos

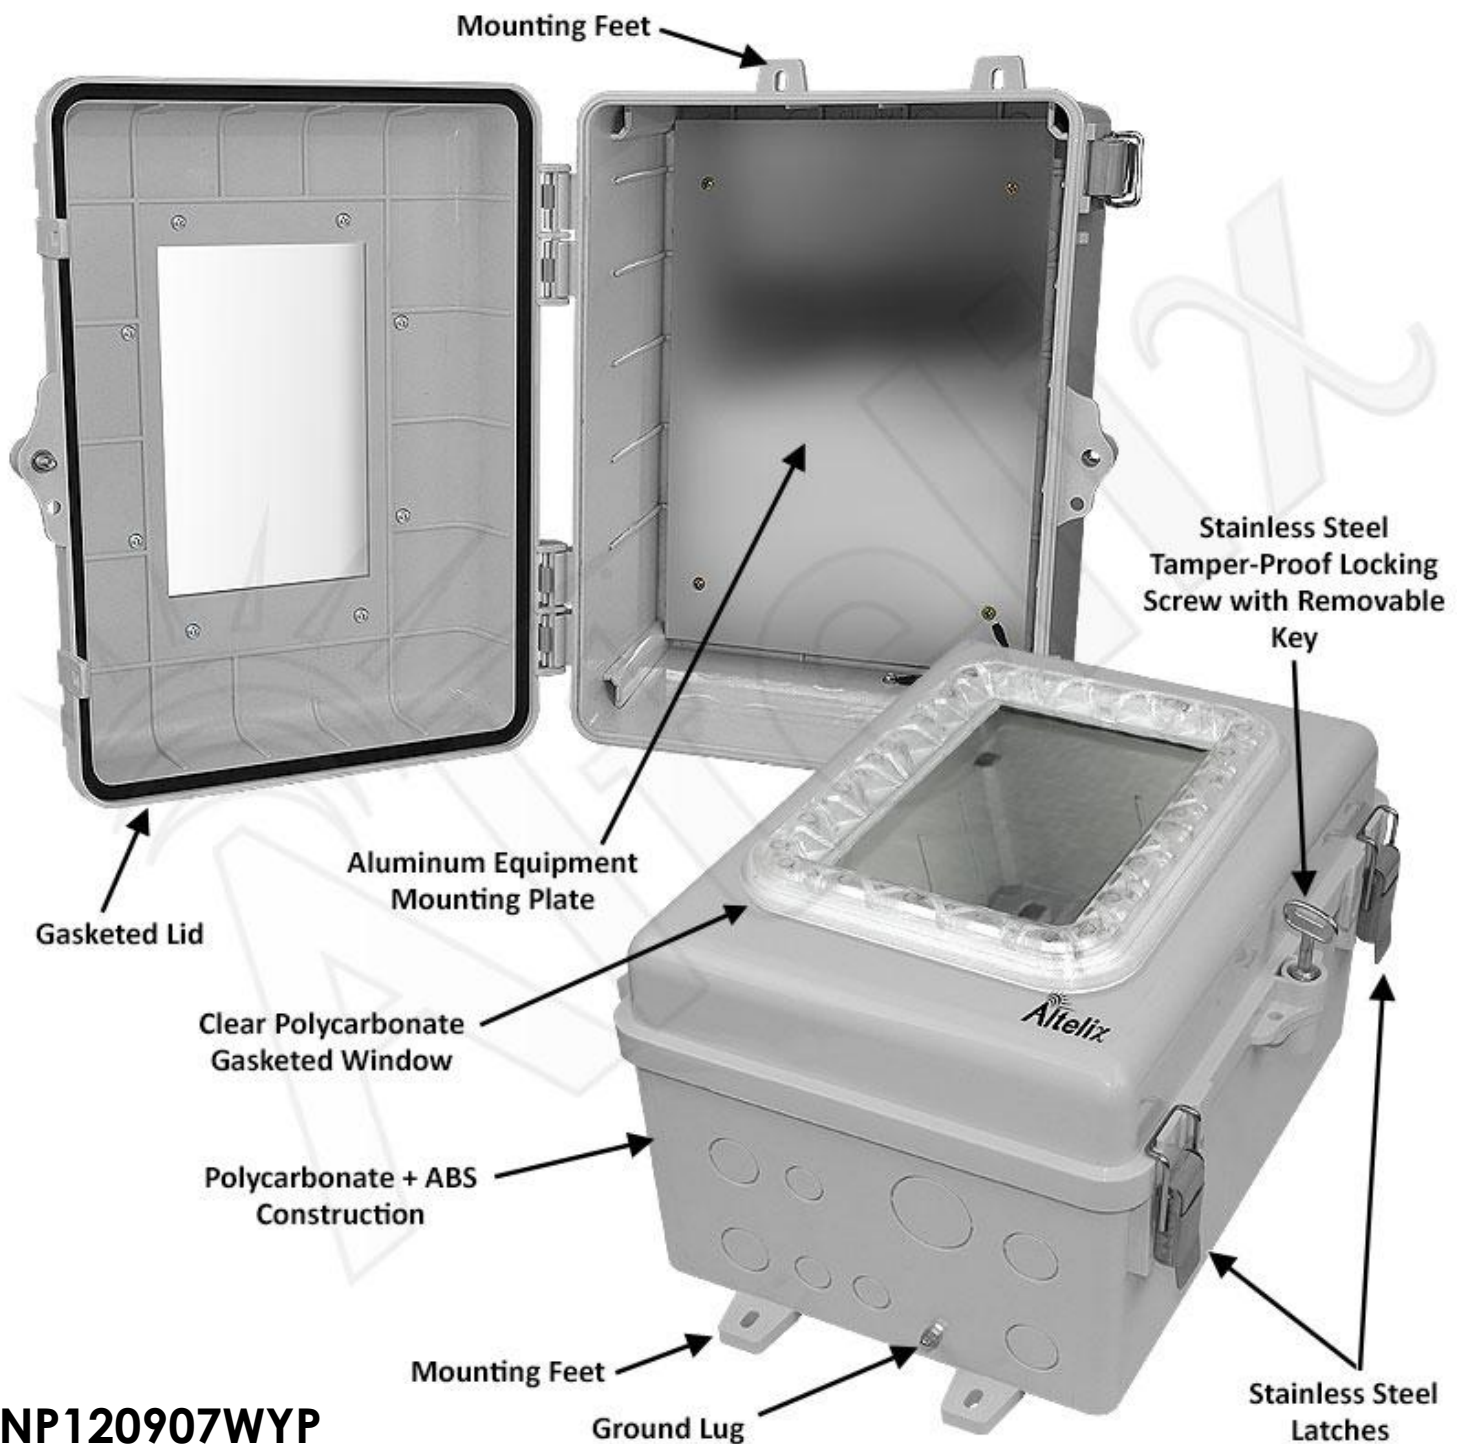**NP120907WYP**

Specifications

Material	PC+ABS Polycarbonate / ABS Blend
Color	Gray
Outer Dimensions (Height x Width x Depth)	13.0 x 10.2 x 7.5 Inches (332 x 259 x 191 mm)
Inner Dimensions* (Height x Width x Depth)	10 x 7.1 x 5.3 inches (254 x 180 x 134 mm)
Weight	3.6 lbs. (1.7 kg)
Ratings	Meets or Exceeds NEMA 1, 2, 4, 4X, 12, 13 and IEC 529 IP65, IP66
Flame Rating	Meets UL94-V0
Industry Certifications	CE
Knockout Sizes (Diameter)	(3) 0.62 in. (16 mm) (4) 1.02 in. (26 mm) (1) 1.30 in. (33 mm)

Optional PVC Equipment Mounting Plate

Mounting Plate Material	0.40 in. (10mm) PVC
Mounting Plate Size	10.4 x 7.3 in. (265 x 186 mm)

Optional Aluminum Equipment Mounting Plate

Mounting Plate Material	0.06 in. (1.5mm) Aluminum
Mounting Plate Size	10.4 x 7.3 in. (265 x 186 mm)

*Interior dimensions represent maximum space available for equipment.