



Altelix Weatherproof Enclosure for Roku® Ultra and Ultra LT with Cooling Fan, 120VAC Outlet and Power Cord



Features

- Designed to fit Roku® Ultra (Model 4802) and Roku® Ultra LT (Model 4801)
- Plug-n-Play Design, Easy to Install
- Dual Vents with Thermostat Controlled Cooling Fan
- ABS + Polycarbonate Construction
- Gasketed Lid with Tamper-Proof Locking Screw
- Dual Door Latches
- Finished Aluminum Equipment Mounting Plate
- Pre-Wired 120VAC Outlet
- Pre-wired 5 Foot Power Cord
- NEMA Type 3R, 3RX / IP24 Rated
- Includes Wall Mount Hardware and Cable Management Straps

Roku® is a trademark or registered trademark of Roku, Inc.



Description

The Altelix NP12FA1-RKU1 Enclosure is a weatherproof fan-cooled enclosure designed to provide indoor or outdoor protection for the Roku® Ultra and Ultra LT streaming player.

Install Your Roku® Ultra Securely Outdoors

This sleek enclosure is molded out of UV resistant Polycarbonate + ABS, an industrial grade plastic with greater strength and durability than standard ABS. It features a gasketed hinged door with dual latches, a stainless-steel security screw and provision for padlock. Integrated mounting feet simplify installation. It meets or exceeds NEMA 3R, 3RX and IP24.

Roku® Ultra Mounting Cradle

The NP12FA1-RKU1 features a mounting cradle specifically designed for the Roku® Ultra (Model 4802) and Roku® Ultra LT (Model 4801) streaming player. Installation is easy, simply slide the Roku® Ultra into the cradle. For installations subject to vibrations, an optional hook and loop strap is provided to secure the Roku® player in the cradle. The cradle is designed so that it will not interfere with any of the ports on the Roku® player such as power, Ethernet and HDMI.

Plug and Play Setup

The NP12FA1-RKU1 enclosure provides easy plug-n-play installation. Once the Roku® player is securely mounted inside the enclosure, connect its power supply to the internal 120VAC power outlet. A cable gland and cable grommets on the enclosure allow cables to be connected to the device. Simply plug the enclosure's 5 foot power cord into an outdoor outlet and you are up and running.

Cooling Fan Ventilation

To help keep your Roku® player running cool, the NP12F1-APV1 features two 2½" inch air vents and a thermostat-controlled cooling fan. The low noise, high airflow fan helps maintain lower internal temperatures. The fan turns on when the internal temperature reaches 100°F (38°C) and turns off when it drops to 79°F (26°C). The fan is wired internally so it does not require use of the AC outlet. Rain shrouds on the front door keep rainwater from entering the enclosure.

Complete with Cable Grommets and Glands and Wire Management Straps


For convenience, the included accessory kit contains cable grommets and glands, wall anchors, zip ties, hook-and-loop wire management straps, door locking key and more.

Mounting

The mounting feet on the NP12FA1-RKU1 allows it to be easily wall mounted with the included hardware. A pole mounting kit is also available for this enclosure.



Product Photos

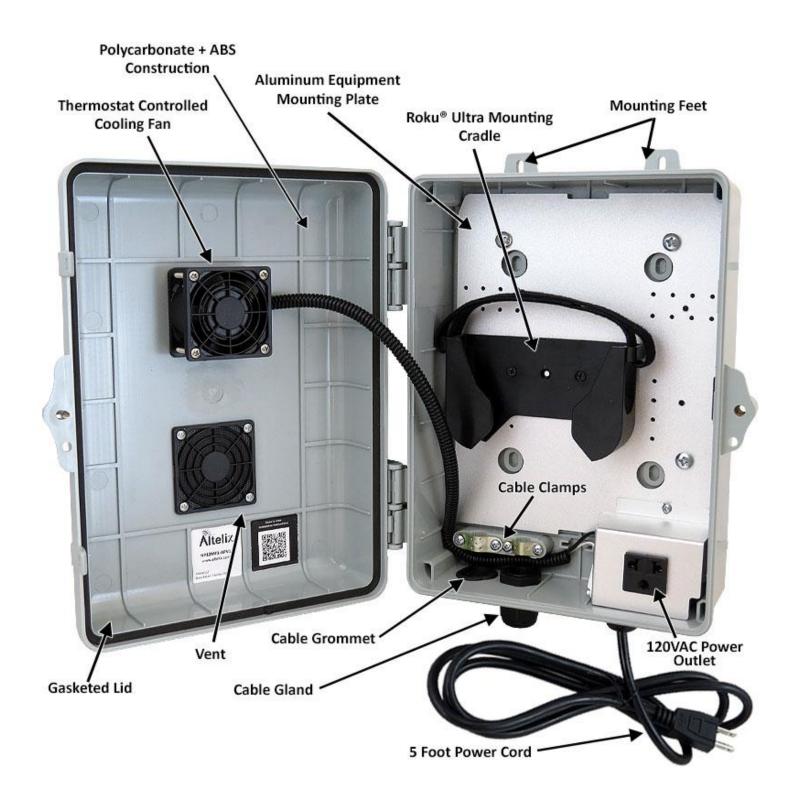



Product Photos





Specifications

Material	Polycarbonate + ABS
Available Colors	See Below
Voltage / Max Load	120VAC / 10A @ 120V
Cooling Fan Turn-On Temperature	100°F (38°C)
Cooling Fan Turn-Off Temperature	79°F (26°C)
Outer Dimensions (Height x Width x Depth)	13.1 x 10.2 x 5.9 Inches (334 x 259 x 151 mm)
Mounting Plate Material	0.06 In. (1.5mm) Aluminum
Weight	3.7 lbs. (1.7 kg)
Power Cord Length	5 Feet (1.5m)
Ratings	Meets NEMA 3R, 3RX and IP24
Flame Rating	Meets UL94-V0
Compatible Roku® Ultra Models	Roku® Ultra (Model 4802) Roku® Ultra LT (Model 4801)





Accessories

Model	Description
NMKG-150-08	The Altelix NMKG-150-08 Pole Mount Kit easily attaches to the enclosure. This pole mount kit allows the enclosures to be mounted to poles up to 7.6 inches in diameter. The mounting brackets are constructed from 0.04" (1mm) thick galvanized steel for all weather applications.
HN-0004	Replacement door locking key.