



(Shown with 32oz Eyewash Solution Bottle Installed – Not Included)

## Features

- Adjustable bracket for holding 32oz eyewash solution bottle (not included)
- Includes hook-n-loop strap to secure bottle in high vibration locations or vehicle mounted applications
- Weatherproof green and white UV resistant Emergency Eye Wash label on enclosure lid
- Durable Polycarbonate + ABS construction
- Weatherproof and UV Stable
- Meets NEMA 1, 2, 4, 4X, 12, 13 and IEC 529 IP65, IP66
- Gasketed lid with dual stainless steel latches
- Can be mounted using external mounting feet or internal mounting feet
- Includes hook-n-loop tape and wall mounting hardware
- Optional pole mount kits available

## Description

---

The **Altelix Weatherproof Emergency Eyewash Enclosure** is ideal for deploying in outdoor locations and harsh environments. Included with the enclosure is an adjustable bottle holder designed for use with many 32oz eye wash solution bottles (not included) such as the PhysiciansCARE® shown in the photos. The holder is designed so that the eye wash bottle can be quickly pulled from the holder even while impaired. The height of the holder can be adjusted to accommodate different bottle heights. A hook-n-loop strap is also provided for use in high vibration locations or vehicle mounted applications.

**Note:** The eyewash solution bottle holder will accept most 32oz bottles 3.5" (88.9mm) in diameter. Some of the recommended 32oz eyewash solutions include:

- PhysiciansCARE® Eyewash
- Uline® Eyewash Saline
- Honeywell® eyesaline® Eyewash
- Sperian® Eyewash Saline
- Medi-First® Emergency First Aid Eyewash
- Radians® Pur-Wash™ Eyewash
- Global Industrial™ Emergency Eyewash

### Emergency Eye Wash Station Label

NP12GY-EWK1 includes a green and white weatherproof UV resistant Emergency Eye Wash Station label on the door.

### Rugged All-Weather Construction


This NEMA 4X enclosure is molded out of UV resistant Polycarbonate + ABS, a high-tech thermoplastic blend of polycarbonate and ABS which combines the best qualities of both into a single material. PC+ABS enclosures are superior to ABS enclosures because they maintain high toughness, durability and dimensional stability even at extreme cold and hot temperatures. The door is fully gasketed making this enclosure suitable for use in dusty or wet areas.

### Multiple Mounting Options

This enclosure features (4) external mounting feet which can be used for wall mounting or with our optional pole mounting kit. Mounting points are also provided inside the enclosure. These can be easily drilled out and used for applications requiring a more secure installation.

## Product Photos

---

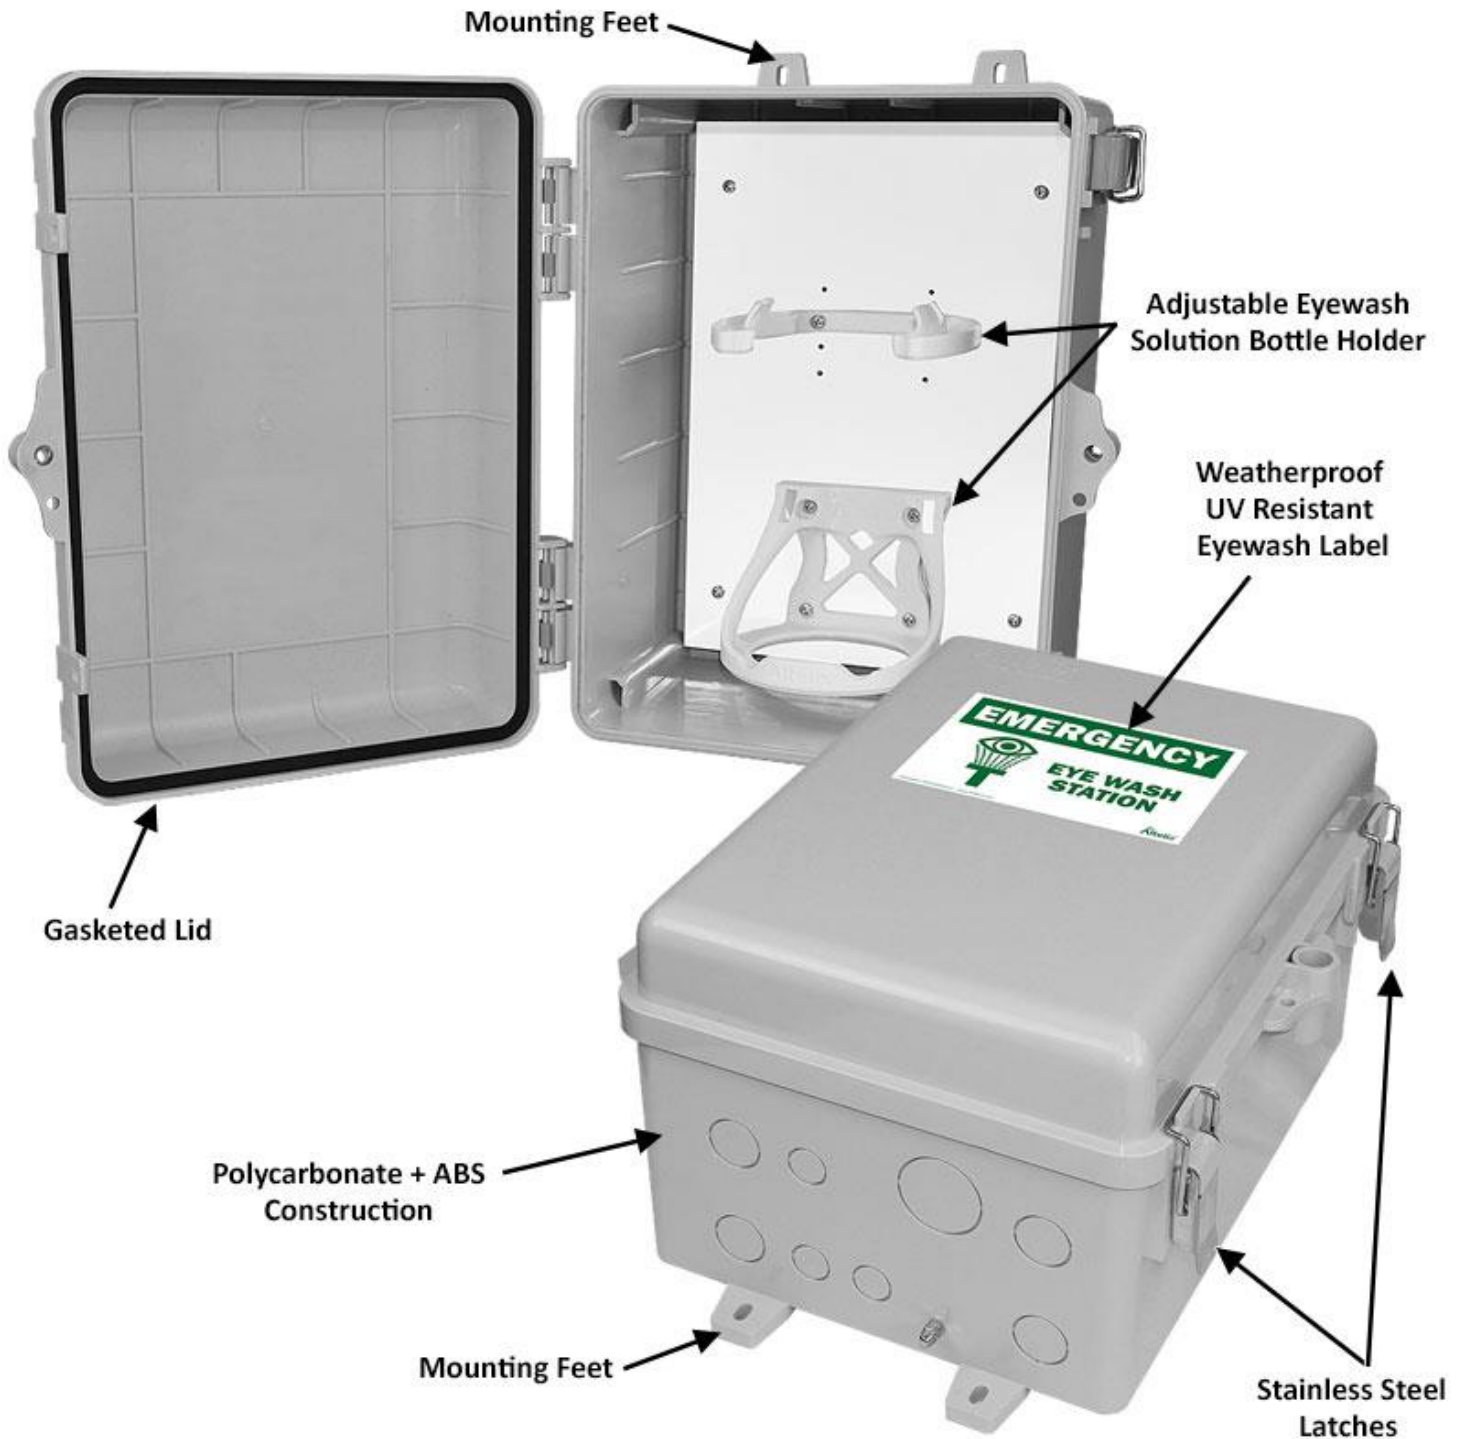


## Specifications

---

<b>Material</b>	Polycarbonate + ABS
<b>Color</b>	Gray
<b>Outer Dimensions</b> (H x W x D)	13.0 x 10.2 x 6.9 Inches (332 x 259 x 176 mm)
<b>Inner Dimensions</b> (H x W x D)	10 x 7.1 x 5.6 inches (254 x 180 x 142 mm)
<b>Weight</b>	3.6 lbs. (1.7 kg)
<b>Ratings</b>	NEMA Type 1, 2, 4, 4X, 12, 13 / IP65, IP66
<b>Flame Rating</b>	Meets UL94-V0
<b>Industry Certifications</b>	CE

## Accessories

---

Model		Description
<b>NMKQ-200-08</b>		The Altelix NMKQ-200-08 Pole Mount Kit easily attaches to the enclosure. This pole mount kit allows the enclosures to be mounted to poles up to 2.0 to 7.6 inches in diameter. The mounting brackets are constructed from 304 stainless steel for all weather applications.