



TP-Link® EAP650 Not Included

## Features

- Designed to fit the TP-Link® EAP650 AX3000 WiFi 6 Access Point
- Plug-and-Play design, easy to install
- Dual 2.25" vents with rain shields and screens
- RF transparent design will not affect wireless signal range or coverage pattern
- Unique cable gland allows you to feed a pre-terminated Ethernet cable into the enclosure
- Weatherproof and UV stable durable Polycarbonate + ABS construction
- Gasketed lid with tamper-proof locking screw
- NEMA Type 3R, 3RX / IP24 Rated
- Includes wall mount hardware and cable grommets

TP-Link® is a trademark or registered trademark of TP-Link, Corp.

## Description

---

The **Altelix NP12VA1C-TPL2** is a vented weatherproof enclosure designed to provide added security, vandalism and protection from harsh environments, while allowing ventilation for the TP-Link® EAP650 AX3000 WiFi 6 access point. It features two 2¼" inch air vents with rain shields and screens. This enclosure is for installations powering the TP-Link® EAP650 AX3000 via Power-Over-Ethernet (PoE) which is ideal for remote locations where AC power is not available.

### Install Your TP-Link® EAP650 Securely

This sleek enclosure is molded out of UV resistant Polycarbonate + ABS, an industrial grade plastic with greater strength and durability than standard ABS. It features a gasketed hinged door with dual latches, a stainless-steel security screw and provision for padlock. Integrated mounting feet simplify installation. It meets or exceeds NEMA 3R, 3RX and IP24.

### Plug and Play Setup

The NP12V-TPL2 enclosure provides easy plug-n-play installation. Simply attach the mounting bracket included with the TP-Link® EAP650 to the equipment mounting plate. The equipment mounting plate is pre-drilled so no tools are need other than a screw driver. A cable gland on the enclosure allow a pre-terminated data/power cable to be connected to the device.

### RF Transparent Design

The non-metallic design of the enclosure and bracket is RF transparent and will not interfere with the WiFi signal range or coverage pattern.


### Complete with Cable Grommets and Glands and Wire Management Straps

For convenience, the included accessory kit contains cable grommets and glands, wall anchors, zip ties, hook-and-loop wire management straps, door locking key and more.

### Mounting

The external mounting feet on the NP12VA1C-TPL2 allows it to be easily wall mounted with the included hardware. For added security, mounting the enclosure using the internal mount feet can prevent the enclosure from being removed when locked. A pole mounting kit is also available for this enclosure.

## Product Photos

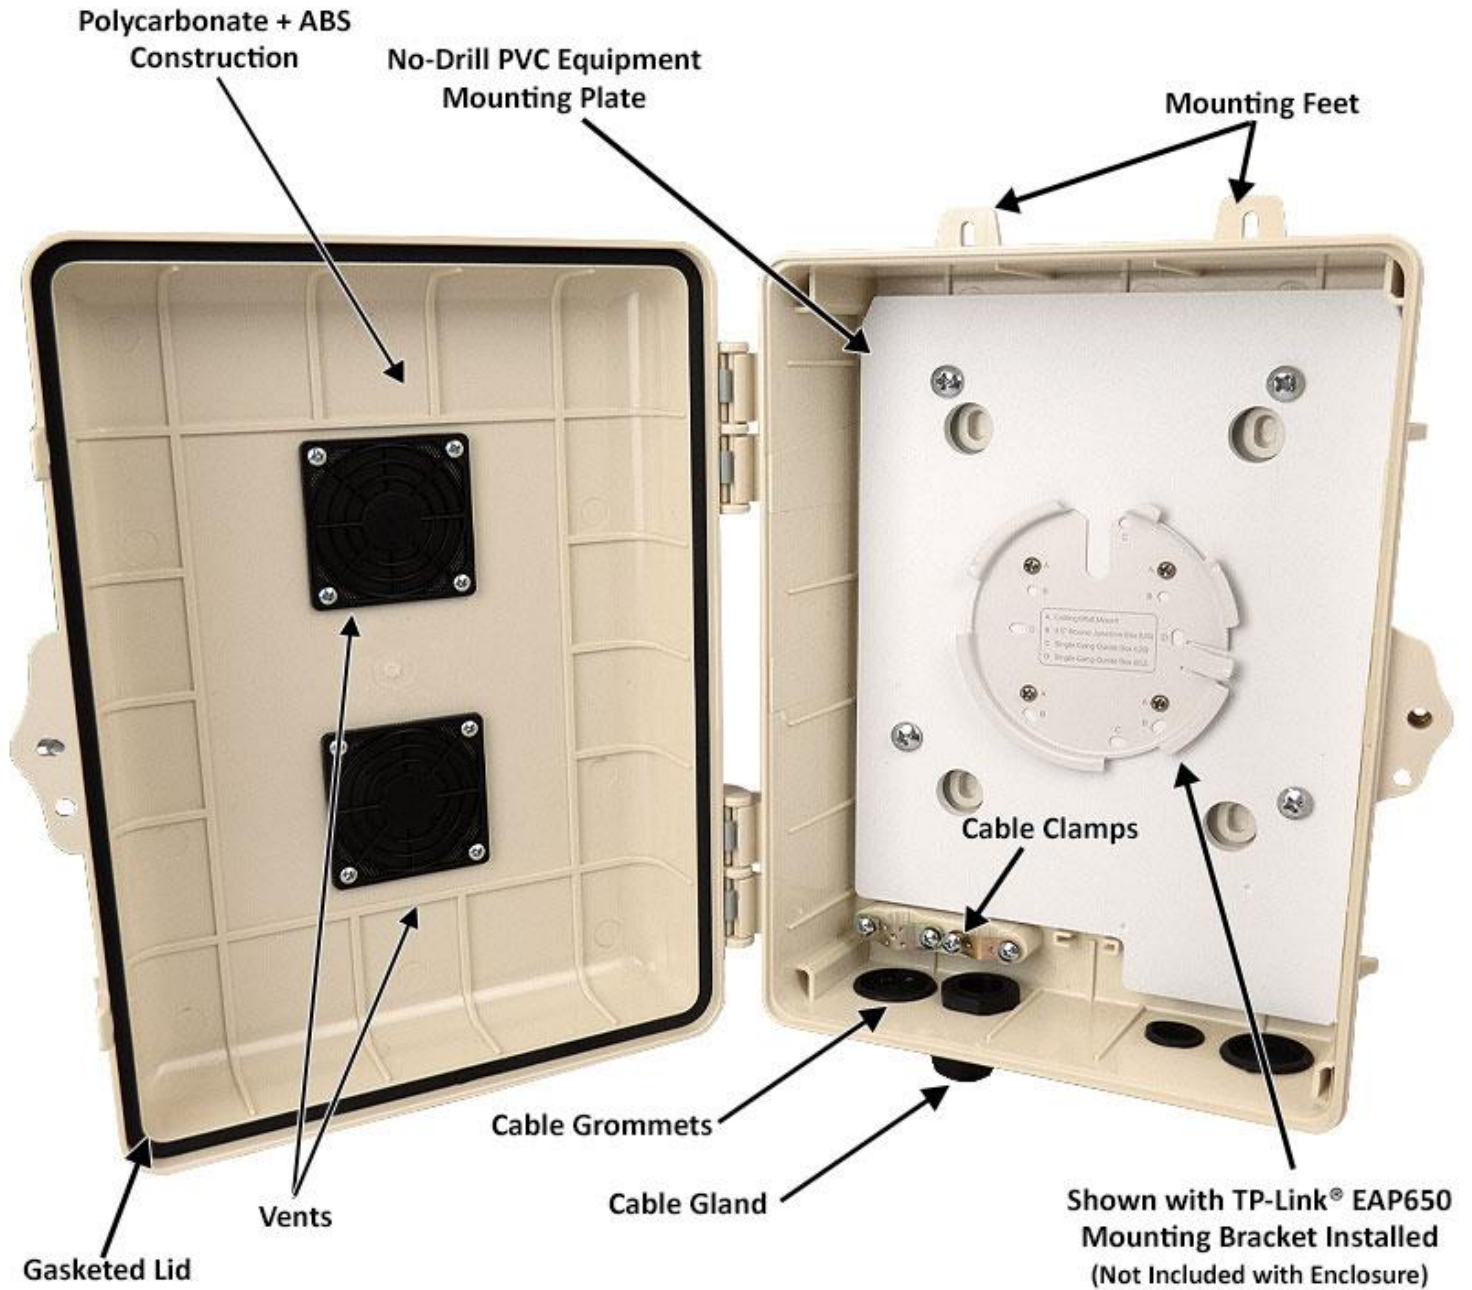

## Product Photos

---



## Specifications

---

<b>Material</b>	PC+ABS Polycarbonate / ABS Blend
<b>Color</b>	Light Ivory, Gray, OD Green
<b>Outer Dimensions</b> (Height x Width x Depth)	13.1 x 10.2 x 5.9 Inches (334 x 259 x 151 mm)
<b>Inner Dimensions</b> (Height x Width x Depth)	8.5 x 7.5 x 2.7 Inches (216 x 190 x 68 mm)
<b>Mounting Plate Material</b>	0.25 in (6.4 mm) PVC
<b>Weight</b>	2.6 lbs. (1.18 kg)
<b>Ratings</b>	NEMA Type 3R, 3RX / IP24
<b>Flame Rating</b>	Meets UL94-V0
<b>Compatible TP-Link® Model</b>	EAP650 AX3000 WiFi 6 Access Point

## Available Colors

---

