

## NP12VA1C-EER3

Altelix Vented Weatherproof Enclosure for Amazon eero® 6 and eero® 6 Extender with 120VAC Outlet and Power Cord



### **Features**

- Designed to fit the Amazon eero® 6 (#N010011) and eero® 6 Extender (#Q010011)
- Plug-and-Play design, easy to install
- Dual 2.25" vents with rain shields and screens
- RF transparent design will not affect wireless signal range or coverage pattern
- Pre-wired 120VAC power outlet and pre-wired 5 foot 3-prong power cord
- Unique cable gland allows you to feed a pre-terminated Ethernet cable into the enclosure
- Weatherproof and UV stable durable Polycarbonate + ABS construction
- Gasketed lid with tamper-proof locking screw
- NEMA Type 3R, 3RX / IP24 Rated
- Includes wall mount hardware and cable grommets

Amazon eero® is a trademark or registered trademark of Amazon Technologies, Inc.



## **Description**

The **Altelix NP12VA1C-EER3** is a vented weatherproof enclosure designed to provide added security, vandalism and protection from harsh environments, while allowing ventilation for the Amazon eero® 6 router and eero® 6 Extender. It features two 2½" inch air vents with rain shields and screens.

#### Install Your Amazon eero® 6 Securely

This sleek enclosure is molded out of UV resistant Polycarbonate + ABS, an industrial grade plastic with greater strength and durability than standard ABS. It features a gasketed hinged door with dual latches, a stainless-steel security screw and provision for padlock. Integrated mounting feet simplify installation. It meets or exceeds NEMA 3R, 3RX and IP24.

#### Amazon eero® 6 and eero® 6 Extender Mount

The NP12VA1C-EER3 features a mounting cradle specifically designed for the Amazon eero® 2nd Gen Mesh WiFi Router. Installation is easy, simply slide the eero® 6 into the mounting cradle. For extra security and installations subject to vibrations, an optional hook and loop strap is provided to secure the eero® 6 within the mounting cradle. The mounting cradle is designed so that it will not interfere with any of the ports on the eero® router such as power and Ethernet.

#### Plug and Play Setup

The NP12VA1C-EER3 enclosure provides easy plug-n-play installation. Once the eero® 6 is securely mounted inside the enclosure, connect its power supply to the internal 120VAC power outlet. A cable gland and cable grommets on the enclosure allow cables to be connected to the device. Simply plug the enclosure's 5 foot power cord into a power outlet and you are up and running.

#### **RF Transparent Design**

The non-metallic design of the enclosure and bracket is RF transparent and will not interfere with the WiFi signal range or coverage pattern.

#### Complete with Cable Grommets and Glands and Wire Management Straps


For convenience, the included accessory kit contains cable grommets and glands, wall anchors, zip ties, hook-and-loop wire management straps, door locking key and more.

#### Mounting

The external mounting feet on the NP12VA1C-EER3 allows it to be easily wall mounted with the included hardware. For added security, mounting the enclosure using the internal mount feet can prevent the enclosure from being removed when locked. A pole mounting kit is also available for this enclosure.



## **Product Photos**

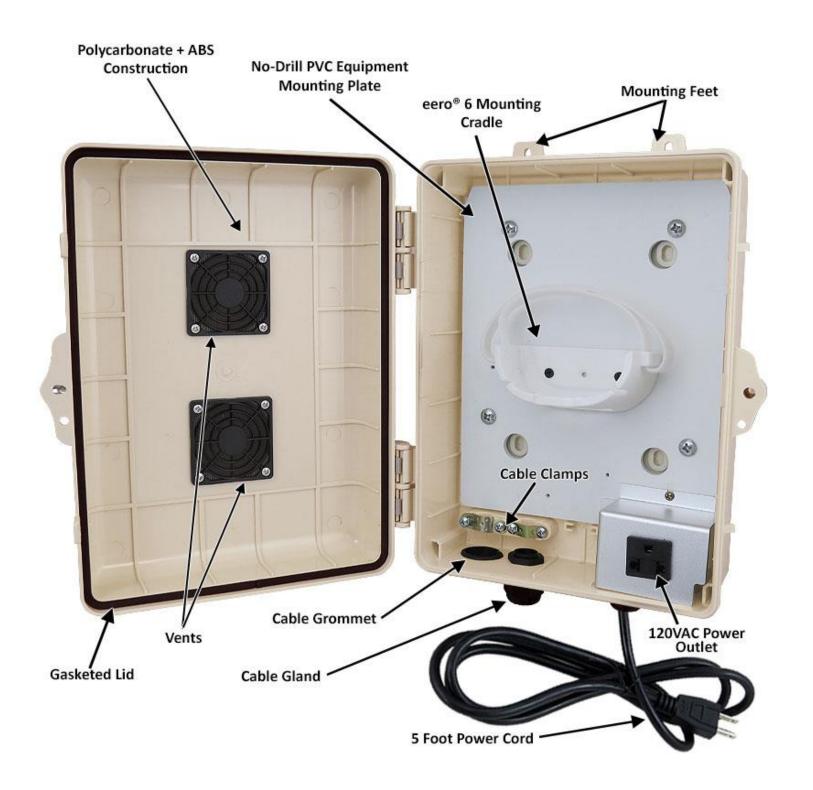



## **Product Photos**





# **Specifications**

Material	PC+ABS Polycarbonate / ABS Blend
Color	Light Ivory, Gray, OD Green
Voltage	120VAC
Max Load	10A @ 120V
Outer Dimensions (Height x Width x Depth)	13.1 x 10.2 x 5.9 Inches (334 x 259 x 151 mm)
Inner Dimensions (Height x Width x Depth)	8.5 x 7.5 x 2.7 Inches (216 x 190 x 68 mm)
Mounting Plate Material	0.25 in (6.4 mm) PVC
Weight	3.7 lbs. (1.7 kg)
Power Cord Length	5 Feet (1.5m)
Ratings	NEMA Type 3R, 3RX / IP24
Flame Rating	Meets UL94-V0
Compatible eero® Model	eero® 6 (Model N010011) eero® 6 Extender (Model Q010011)

# **Available Colors**

