


14x11x5 Vented Polycarbonate + ABS Weatherproof NEMA Enclosure with 120 VAC Cooling Fan and Power Cord

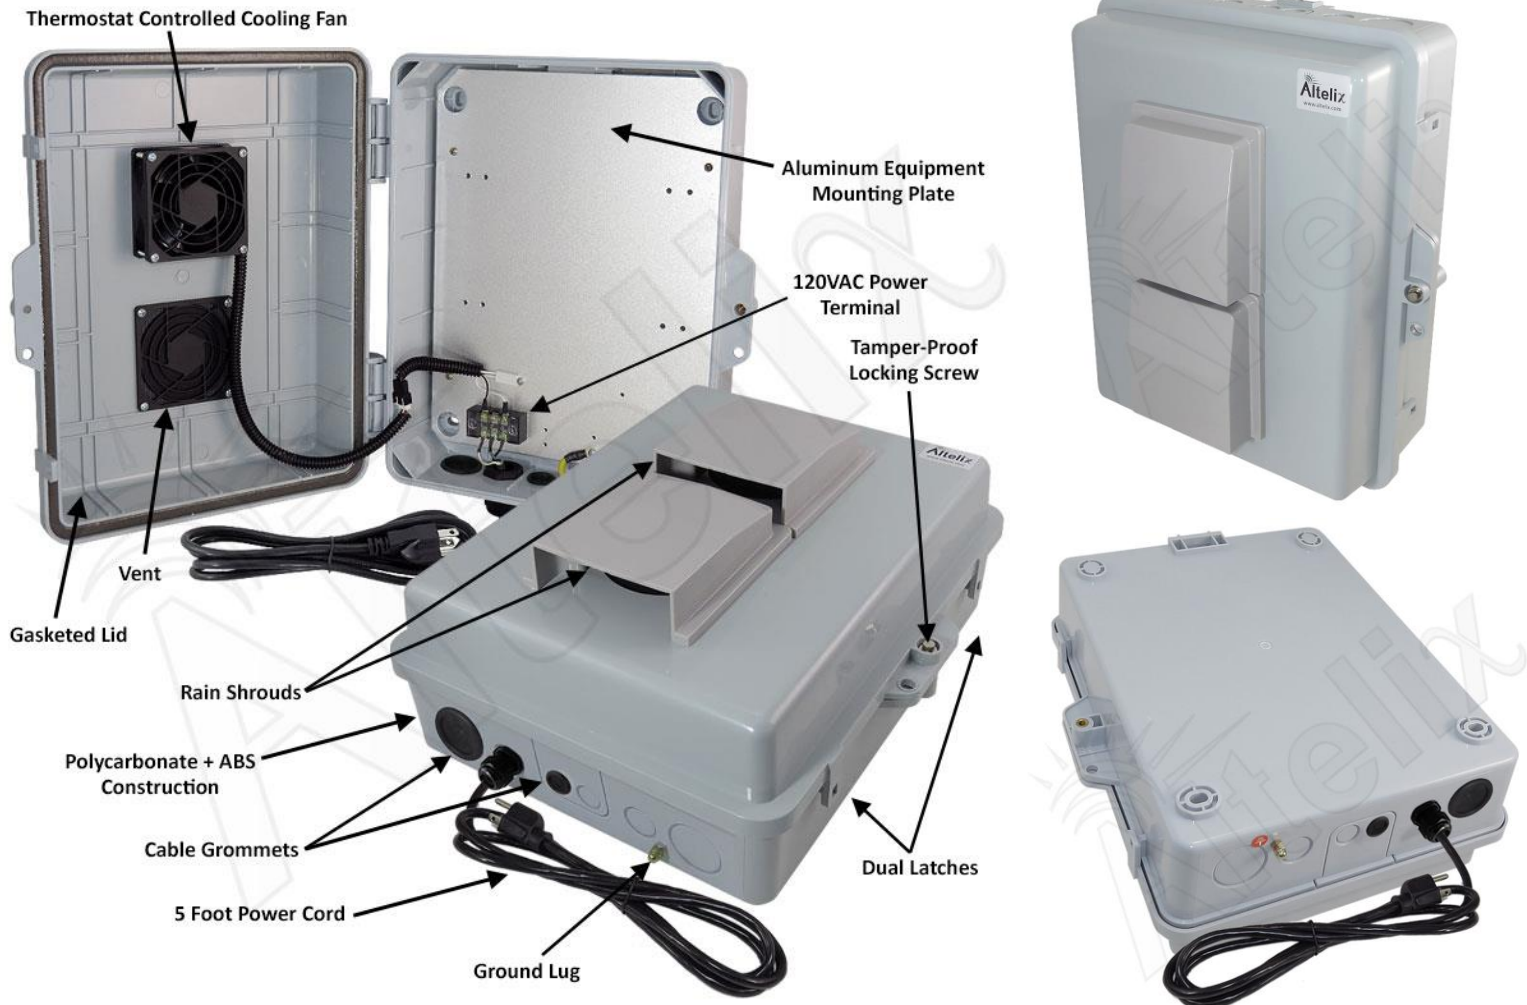

Features

- Dual 3" Vents with Rain Shields and Screens
- 120 VAC Thermostat Controlled Cooling Fan
- ABS + Polycarbonate Construction
- Gasketed Lid with Tamper-Proof Locking Screw
- Dual Door Latches
- Finished Aluminum Equipment Mounting Plate
- Pre-wired 5 Foot Power Cord (for Cooling Fan)
- NEMA Type 3R, 3RX / IP24 Rated
- Includes Wall Mount Hardware and Cable Grommets
- Optional Pole Mount Kits Available

Description

The **Altelix NP141105VFA1C-0** is designed for applications that do not require internal AC power outlets. This enclosure features a fully gasketed door to protect from dust and water ingress. The door features reinforced hinges, dual latches and a tamper-proof locking screw with key to secure the enclosure. There is also a provision for padlock use. Internal and external electrical ground points are also provided.

Polycarbonate + ABS Protection Built to Last - This enclosure is molded out of UV resistant Polycarbonate + ABS, an industrial grade plastic with greater strength and durability than standard ABS. It features a gasketed hinged door with dual latches, a stainless steel security screw and provision for a padlock. Knock-out holes are provided on the top and bottom.

Fan Cooling with Thermostat Control - This enclosure features two 3" vents and a thermostat controlled cooling fan which helps maintain lower internal temperatures. Rain shrouds keep rainwater from entering the enclosure while allowing ventilation for installed equipment. The fan is wired directly to the internal 120 VAC power terminal.

Power Cord - A 5 foot pre-wired power cord is included to power the cooling fan, so no additional wiring is required. The enclosure can also be hard wired by an electrician or qualified installer. An external ground lug is provided. Cable grommets on the enclosure allows cables to be connected to internal devices. Knock-outs are also provided on the enclosure for additional wiring. Extra cable grommets are included with the accessory kit.

Aluminum Equipment Mounting Plate - This enclosure includes a 2.0mm thick aluminum equipment mounting plate. Both the enclosure and plate can be drilled and modified by the installer to suit unique site requirements.

Specifications

Material	PC+ABS Polycarbonate / ABS Blend
Color	Gray (See Altelix.com for full list of available colors)
Cooling Fan Voltage	120VAC
Cooling Fan Turn-On Temperature	100°F (38°C)
Cooling Fan Turn-Off Temperature	79°F (26°C)
Outer Dimensions (Height x Width x Depth)	13.4 x 11.5 x 6.3 Inches (340 x 293 x 160 mm)
Inner Dimensions* (Height x Width x Depth)	8.5 x 8.0 x 3.2 Inches (216 x 203 x 81 mm)
Mounting Plate Material	0.08 in (2.0 mm) Aluminum
Mounting Plate Dimensions	11.7 x 9.0 in. (298 x 230 mm)
Weight	5.4 lbs. (2.4 kg)
Power Cord Length	5 Feet (1.5m)
Ratings	NEMA Type 3R, 3RX / IP24
Flame Rating	Meets UL94-V0
Knockout Sizes (Diameter)	(4) 0.62 in. (16 mm) (4) 0.78 in. (20 mm) (4) 1.30 in. (33 mm)

*Interior dimensions represent maximum space available for equipment.