


14x11x5 Polycarbonate + ABS Vented Indoor / Outdoor RF Transparent Enclosure with PVC Non-Metallic Equipment Mounting Plate, Cooling Fan, 120 VAC Outlets & Power Cord

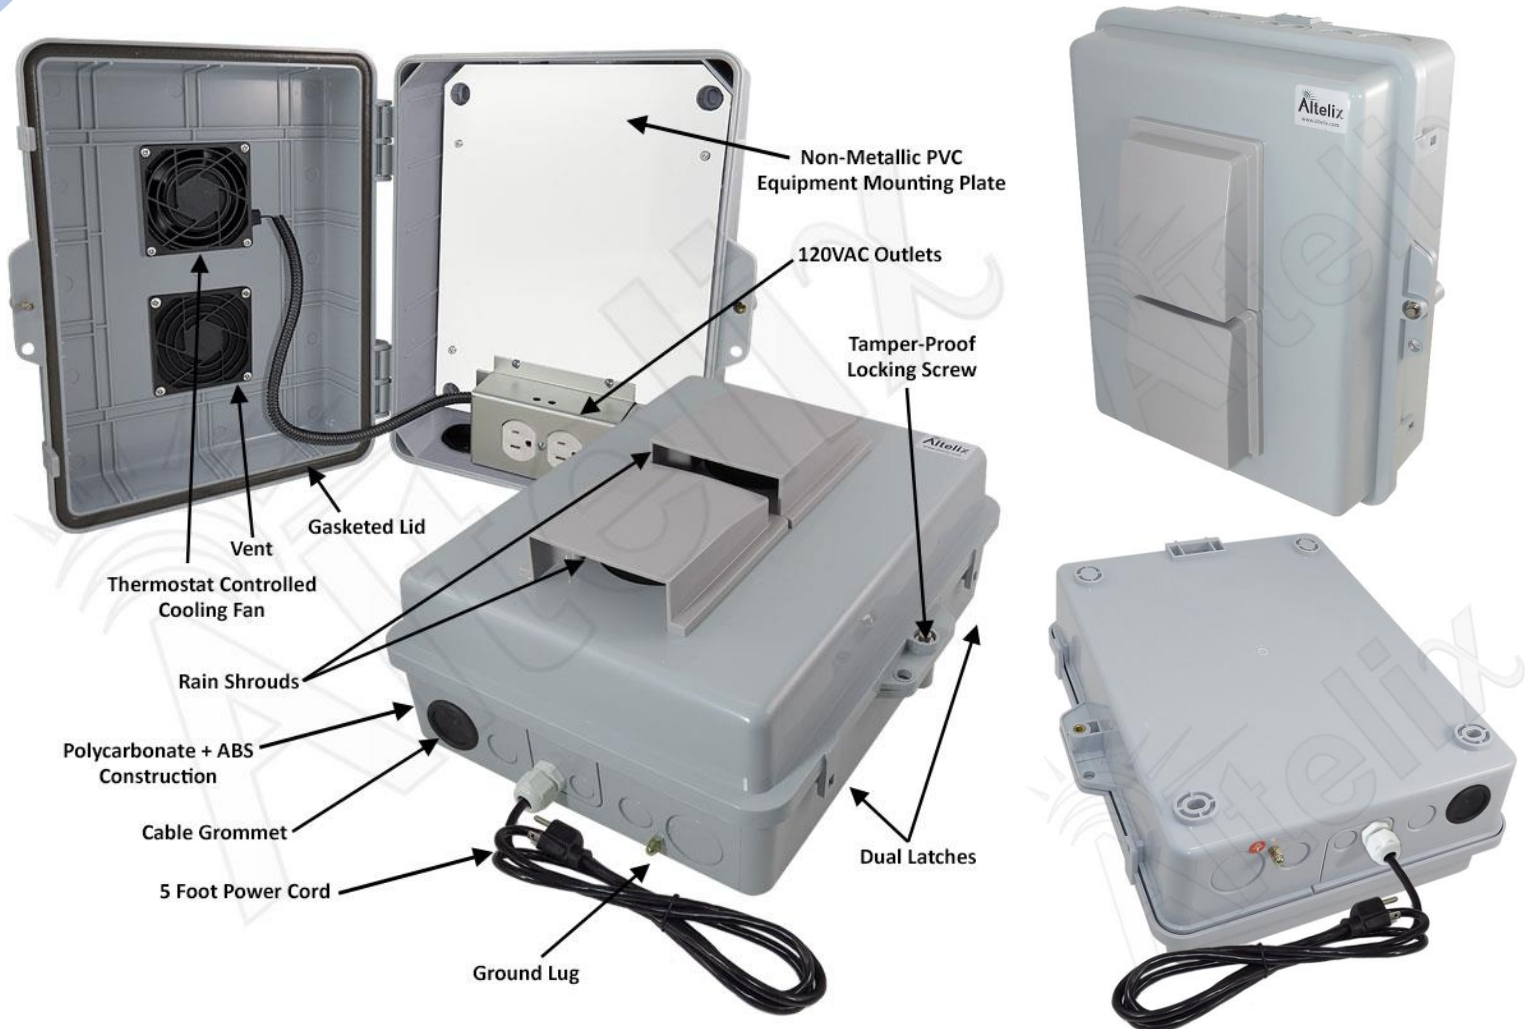

Features

- Dual 3" Vents
- Thermostat Controlled Cooling Fan
- ABS + Polycarbonate Construction
- Gasketed Lid with Tamper-Proof Locking Screw
- Dual Door Latches
- Features a No-Drill PVC Non-Metallic Equipment Mounting Plate
- (2) Pre-Wired 120VAC Outlets
- Pre-wired 5 Foot Power Cord
- NEMA Type 3R, 3RX / IP24 Rated
- Includes Wall Mount Hardware and Cable Grommets
- Optional Pole Mount Kits Available

Description

The **Altelix NP141105VMFA1C** NEMA enclosure is simple to install because no wiring is required. Simply mount the enclosure and plug the pre-wired 5 foot power cord into a nearby outlet. The non-metallic equipment mounting plate features two pre-wired 120VAC power outlets for your equipment. A cable grommet on the enclosure allows cables to be connected to internal devices.

Get your project up and running quickly and transition to hard-wired later if needed. The power cord can be easily removed, and the power receptacle hard wired by an electrician or qualified installer.

Polycarbonate + ABS Protection Built to Last - This enclosure is molded out of UV resistant Polycarbonate + ABS, an industrial grade plastic with greater strength and durability than standard ABS. It features a gasketed hinged door with dual latches, a stainless steel security screw and provision for a padlock. Knock-out holes are provided on the top and bottom.

Fan Cooling with Thermostat Control - This enclosure features two 3" vents and a thermostat controlled cooling fan which helps maintain lower internal temperatures. The fan turns on when the internal temperature reaches 100°F (38°C) and turns off when it drops to 79°F (26°C). Rain shrouds keep rain water from entering the enclosure while allowing ventilation for installed equipment. The fan is wired internally, leaving the power outlets available for installed equipment.

RF Transparent Design - The NP141105VMFA1C is ideal for WiFi applications. The non-metallic design of both the enclosure and equipment mounting plate will not interfere with the radio's operation. In addition, mounting radios to the PVC equipment mounting plate can be done simply by using self-tapping screws. The size of this enclosure will fit a wide range of popular wireless points on the market.

Specifications

Material	PC+ABS Polycarbonate / ABS Blend
Color	Gray (See Altelix.com for full list of available colors)
Voltage / Max Load	120VAC / 10A @ 120V
Cooling Fan Turn-On Temperature	100°F (38°C)
Cooling Fan Turn-Off Temperature	79°F (26°C)
Outer Dimensions (Height x Width x Depth)	13.4 x 11.5 x 6.3 Inches (340 x 293 x 160 mm)
Inner Dimensions* (Height x Width x Depth)	9.5 x 8.0 x 3.0 Inches (241 x 203 x 76 mm)
Mounting Plate Material	0.25 in (6.4 mm) PVC
Mounting Plate Dimensions	11.7 x 9.0 in. (298 x 230 mm)
Weight	5.4 lbs. (2.4 kg)
Power Cord Length	5 Feet (1.5m)
Ratings	NEMA Type 3R, 3RX / IP24
Flame Rating	Meets UL94-V0
Knockout Sizes (Diameter)	(4) 0.62 in. (16 mm) (4) 0.78 in. (20 mm) (4) 1.30 in. (33 mm)

*Interior dimensions represent maximum space available for equipment.