# NP141109PA1C

14x11x9 Polycarbonate+ABS Weatherproof NEMA 4X Enclosure with Aluminum Equipment Mounting Plate, 120VAC Outlets & Power Cord

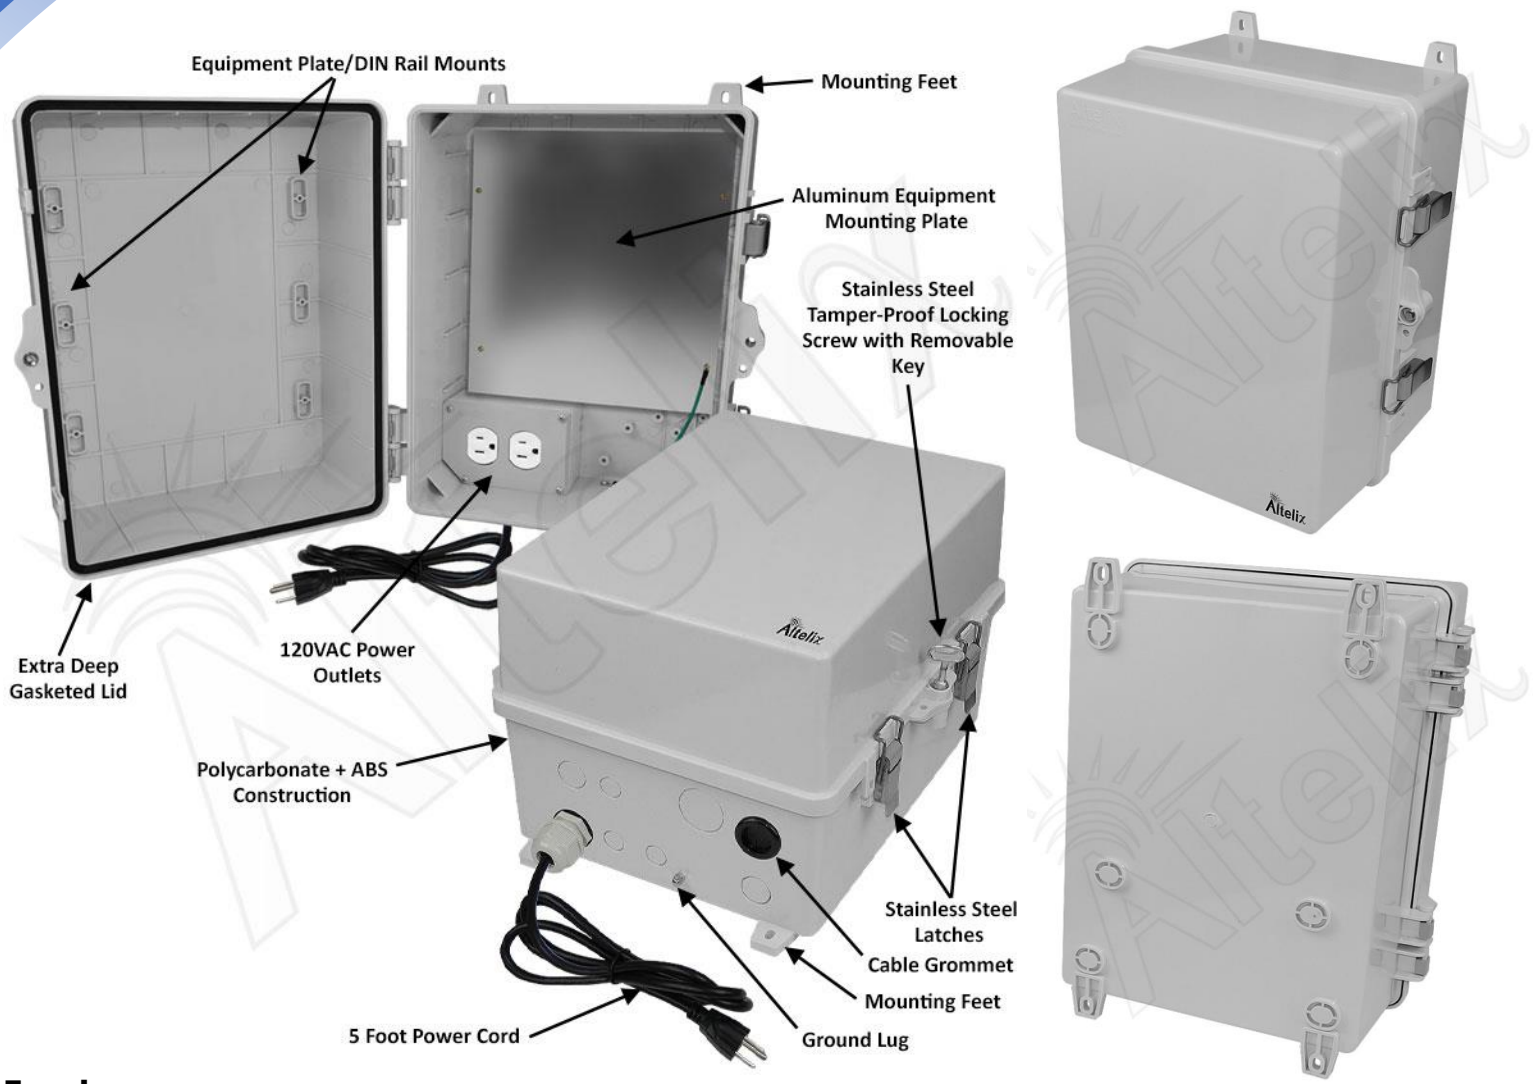


## Features

- (2) Internal pre-wired 120VAC power outlets and pre-wired 5 foot 3-prong power cord
- Features an aluminum equipment mounting plate
- Durable Polycarbonate + ABS construction, weatherproof and UV Stable
- Meets NEMA 1, 2, 4, 4X, 12, 13 and IEC 529 IP65, IP66
- Extra deep gasketed lid with dual stainless-steel latches
- Mounting bosses provided in lid for use with equipment mounting plates or DIN rails
- Tamper-Proof locking screw with key and provision for padlock
- Can be mounted using external mounting feet or internal mounting feet
- RF transparent for wireless devices
- Multiple size knock-out holes on bottom of enclosure
- Includes (2) locking keys, cable grommets, cable glands, zip ties, hook-n-loop tape and wall mounting hardware
- Optional pole mount kits available

Altelix LLC USA: 866-660-9434 +1 561-660-9434 sales@altelix.com www.altelix.com
Copyright (C) 2024 Altelix LLC. All rights reserved. Altelix and the Altelix logo are Trademarks and/or Registered Trademarks of Altelix LLC.
Specifications are subject to change without notice. See www.altelix.com for most current information.

## Description

The Altelix **NP141109PA1C** NEMA 4X enclosure is simple to install because no wiring is required. Simply mount the enclosure and plug the pre-wired 5 foot power cord into a nearby outlet. Two internal pre-wired 120VAC power outlets are provided to power your equipment. The power cord can be removed and the power receptacle hard-wired by a qualified installer.

**Increased Interior Space**
This enclosure features an extra deep gasketed lid, over 4 inches deep. With the generous size of this enclosure and extended lid the NP141109PA1C can accommodate a wide range of equipment.

**Mount Additional Equipment in Lid**
The extra deep lid of this enclosure is designed so that additional equipment can be mounted in the lid for even more versatility. Raised mounting bosses are provided for use with equipment mounting plates or up to (3) Altelix 35mm DIN Rail Kits (sold separately). A large flat section is also provided for use with the hook-n-loop tape included in the accessory kit.

**Aluminum Equipment Mounting Plate**
Included with this enclosure is a 1.5mm thick aluminum plate for mounting and securing equipment. The plate can be easily drilled and modified by the installer to suit unique site requirements.

**Secure Your Equipment**
These NP series enclosures feature dual stainless steel quick release latches. A stainless-steel security screw with keys and a provision for a padlock are also provided.

**Polycarbonate + ABS Protection Built to Last**
This enclosure is molded out of UV resistant Polycarbonate + ABS, an industrial grade plastic with greater strength and durability than standard ABS. This enclosure can be easily drilled and modified by the installer to suit unique site requirements. It meets or exceeds NEMA 1, 2, 4, 4X, 12, 13 and IEC 529 IP65, IP66.

**Complete with Cable Grommets and Wire Management Accessories**
This enclosure includes an assortment of cable grommets and cable glands that can be installed in the knock-out holes for a weather resistant seal. Also included in the accessory kit are wall anchors, zip ties, wire management loops, hook-n-loop tape, ground wire, (2) door locking keys and more.

**Multiple Mounting Options**
This enclosure features (4) external mounting feet which can be used for wall mounting or with our optional pole mounting kit. Mounting points are also provided inside the enclosure. These can be easily drilled out and used for applications requiring a more secure installation.


Copyright (C) 2024 Altelix LLC. All rights reserved. Altelix and the Altelix logo are Trademarks and/or Registered Trademarks of Altelix LLC.
Specifications are subject to change without notice. See www.altelix.com for most current information.

## Specifications

| | |
|---|---|
| **Material** | PC+ABS Polycarbonate / ABS Blend |
| **Color** | Gray |
| **Voltage** | 120VAC |
| **Max Load** | 10A @ 120VAC |
| **Outer Dimensions** | 14.2 x 11.6 x 8.9 Inches (361 x 293 x 226 mm) |
| **Inner Dimensions** | 9.5 x 8.7 x 7.6 inches (241 x 220 x 193 mm) |
| **Mounting Plate Material** | 0.06 in. (1.5 mm) Aluminum |
| **Mounting Plate Dimensions** | 8.9 x 8.5 in. (227 x 216 mm) |
| **Weight** | 5.9 lbs. (2.7 kg) |
| **Power Cord Length** | 5 Feet (1.5m) |
| **Ratings** | Meets NEMA 1, 2, 4, 4X, 12, 13, and IP65, IP66 |
| **Flame Rating** | Meets UL94-V0 |
| **Industry Certifications** | CE |
| **Knock-Out Sizes** | (3) 0.62 in. (16 mm)<br>(4) 1.02 in. (26 mm)<br>(1) 1.30 in. (33 mm) |

Altelix LLC USA: 866-660-9434 +1 561-660-9434 sales@altelix.com www.altelix.com
Copyright (C) 2024 Altelix LLC. All rights reserved. Altelix and the Altelix logo are Trademarks and/or Registered Trademarks of Altelix LLC.
Specifications are subject to change without notice. See www.altelix.com for most current information.