

Altelix Indoor Enclosure for Amazon eero® 6 and eero® 6 Extender with 120VAC Outlet and Power Cord



Amazon eero® 6 and Ethernet  
Cable Not Included

## Features

- Designed to fit the Amazon eero® 6 (Model N010011) and 6 Extender (Model Q010011)
- Plug-n-Play Design, Easy to Install
- ABS + Polycarbonate Construction
- Gasketed Lid with Tamper-Proof Locking Screw and Dual Door Latches
- RF Transparent PVC Non-Metallic Equipment Mounting Plate
- Pre-Wired 120VAC Outlet
- Pre-wired 5 Foot Power Cord
- NEMA Type 3, 3R, 3RX / IP55 Rated
- Includes Wall Mount Hardware and Cable Management Straps

eero® is a trademark or registered trademark of Amazon Technologies, Inc

## Description

---

The **Altelix NP14A1C-EER3** is a weatherproof NEMA enclosure designed to provide added security, vandalism and dust protection for the Amazon eero® 6 WiFi router and eero® 6 Extender.

### Install Your Amazon eero® 6 Securely

This sleek enclosure is molded out of UV resistant Polycarbonate + ABS, an industrial grade plastic with greater strength and durability than standard ABS. It features a gasketed hinged door with dual latches, a stainless steel security screw and provision for padlock. Integrated mounting feet simplify installation. It meets or exceeds NEMA 3, 3R, 3RX and IP55.

### Amazon eero® 6 and eero® 6 Extender Mount

The NP14A1C-EER3 features a mounting cradle specifically designed for both the Amazon eero® 6 WiFi Router and Amazon eero® 6 Extender. Installation is easy, simply slide the router into the mounting cradle. For extra security and installations subject to vibrations, an optional hook and loop strap is provided to secure the router within the mounting cradle. The mounting cradle is designed so that it will not interfere with any of the ports on the eero® 6 such as power and Ethernet.

### Plug and Play Setup

The NP14A1C-EER3 enclosure provides easy plug-n-play installation. Once the eero® 6 is securely mounted inside the enclosure, connect its power supply to the internal 120VAC power outlet. A cable gland and cable grommets on the enclosure allow cables to be connected to the device. Simply plug the enclosure's 5 foot power cord into a power outlet and you are up and running.

### RF Transparent Design

The non-metallic design of the enclosure and bracket is RF transparent and will not interfere with the WiFi signal range or coverage pattern.

### Complete with Cable Grommets and Glands and Wire Management Straps


For convenience, the included accessory kit contains cable grommets and glands, wall anchors, zip ties, hook-and-loop wire management straps, door locking key and more.

### Mounting

The enclosure can be wall mounted using the included wall anchors. An optional pole mount kit is also available for installation on poles up to 8 inches in diameter.

## Product Photos

---

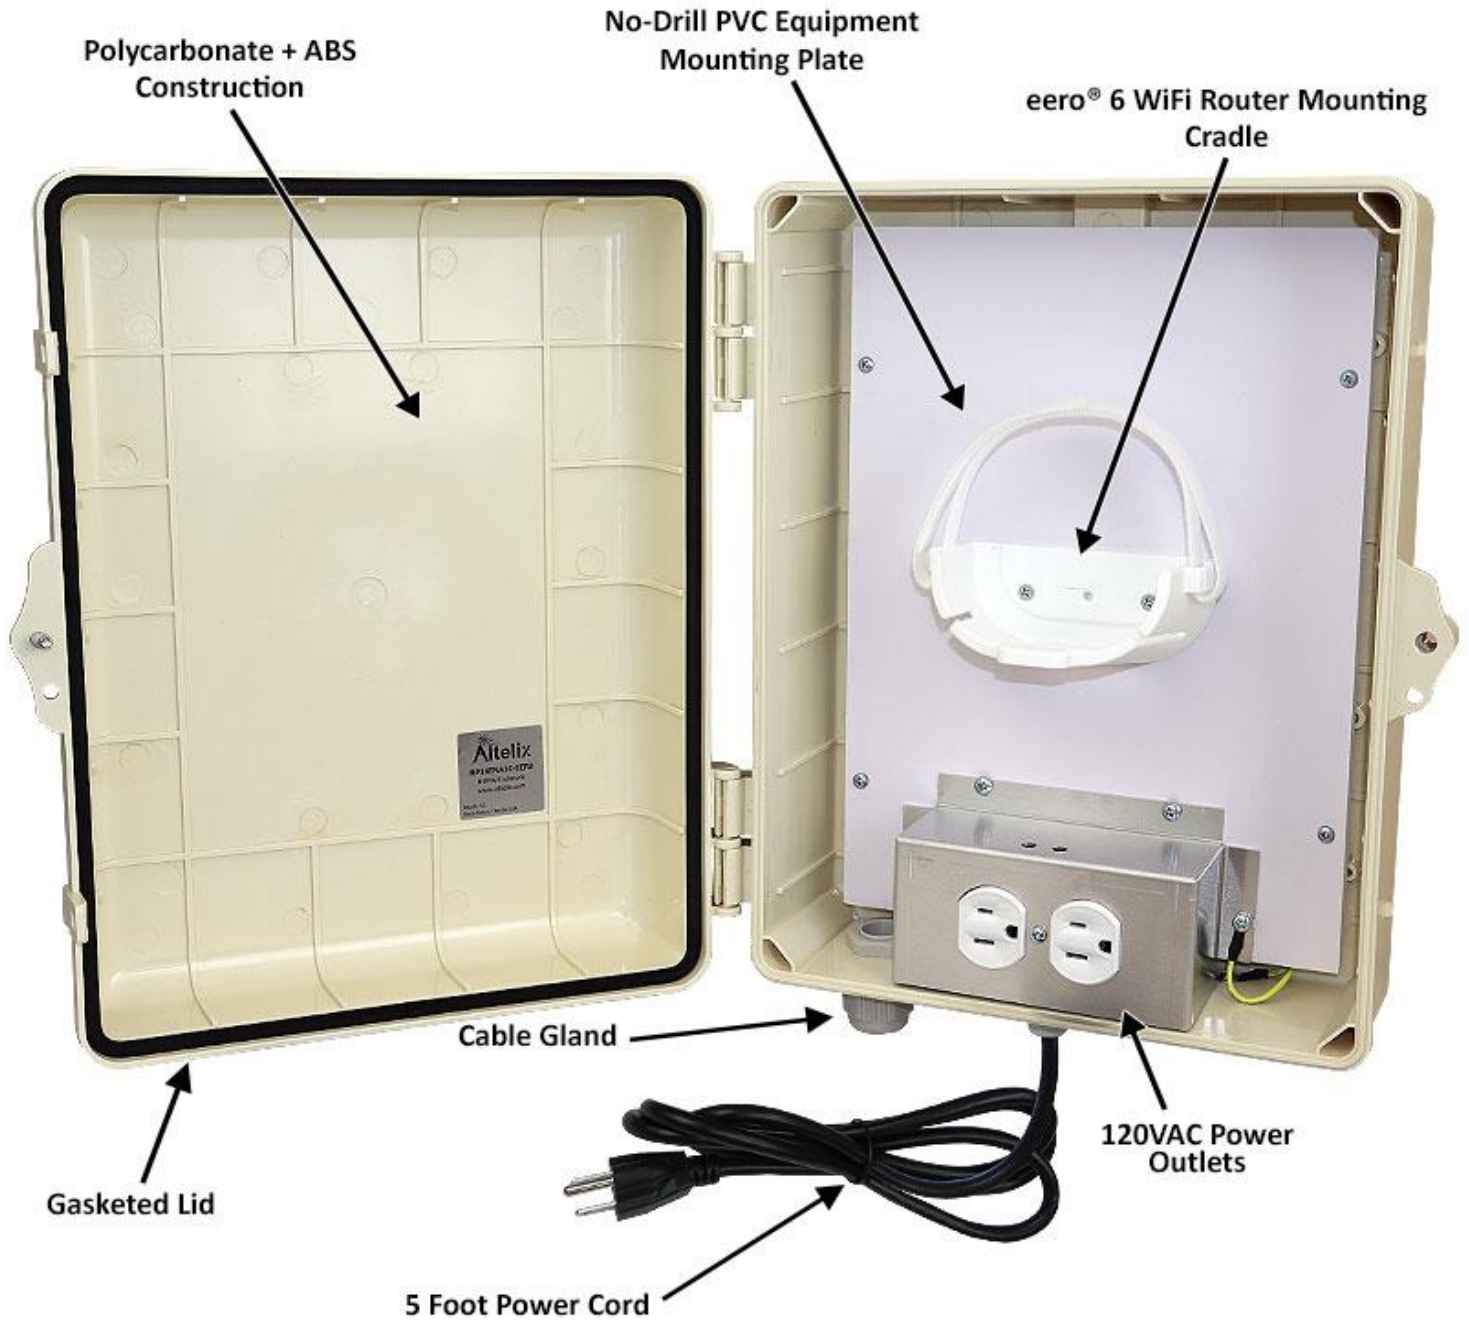

## Product Photos

---



## Specifications

---



<b>Material</b>	Polycarbonate + ABS
<b>Available Colors</b>	Gray, Black, Light Ivory, OD Green
<b>Voltage / Max Load</b>	120VAC / 10A @ 120V
<b>Outer Dimensions</b> (Height x Width x Depth)	13.1 x 10.2 x 4.7 Inches (334 x 259 x 120 mm)
<b>Mounting Plate Material</b>	0.25 In. (6.4mm) PVC
<b>Weight</b>	4.1 lbs. (1.8 kg)
<b>Power Cord Length</b>	5 Feet (1.5m)
<b>Ratings</b>	Meets NEMA 1, 2, 3, 3R, 3RX and IP55
<b>Flame Rating</b>	Meets UL94-V0
<b>Compatible eero® Models</b>	eero® 6 (Model N010011) eero® 6 Extender (Model Q010011)





## Accessories

---

Model		Description
<b>NMKG-240-08</b>		The Altelix NMKG-240-08 Pole Mount Kit easily attaches to the enclosure. This pole mount kit allows the enclosures to be mounted to poles up to 7.6 inches in diameter. The mounting brackets are constructed from 0.04" (1mm) thick galvanized steel for all weather applications.
<b>HN-0004</b>		Replacement door locking key.