



Altelix Indoor Enclosure for Amazon eero® 6+ Mesh Wi-Fi 6 Router with 120VAC Outlet and Power Cord



Features

- Designed to fit the Amazon eero® 6+ (Model R010011) Mesh Wi-Fi 6 Router
- Plug-n-Play Design, Easy to Install
- ABS + Polycarbonate Construction
- Gasketed Lid with Tamper-Proof Locking Screw and Dual Stainless Steel Door Latches
- RF Transparent PVC Non-Metallic Equipment Mounting Plate
- Pre-Wired 120VAC Outlet
- Pre-wired 5 Foot Power Cord
- Meets NEMA 1, 2, 4, 4X, 12, 13 and IEC 529 IP65, IP66
- Includes Wall Mount Hardware and Cable Management Straps

eero® is a trademark or registered trademark of Amazon Technologies, Inc



Description

The **Altelix NP14A1C-EER4** is a weatherproof NEMA enclosure designed to provide added security, vandalism and dust protection for the Amazon eero® 6+ Wi-Fi mesh router.

Install Your Amazon eero® 6+ Securely

This sleek enclosure is molded out of UV resistant Polycarbonate + ABS, an industrial grade plastic with greater strength and durability than standard ABS. It features a gasketed hinged door with dual stainless steel latches, a stainless steel security screw and provision for padlock. Integrated mounting feet simplify installation. It meets or exceeds NEMA 1, 2, 4, 4X, 12, 13 and IEC 529 IP65, IP66.

Amazon eero® 6+ Wi-Fi Mesh Router Mount

The NP14A1C-EER4 features a mounting cradle specifically designed for the Amazon eero® 6+ Router. Installation is easy, simply slide the router into the mounting cradle. For extra security and installations subject to vibrations, an optional hook and loop strap is provided to secure the router within the mounting cradle. The mounting cradle is designed so that it will not interfere with any of the ports on the eero® 6+ such as power and Ethernet.

Plug and Play Setup

The NP14A1C-EER4 enclosure provides easy plug-n-play installation. Once the eero® 6+ is securely mounted inside the enclosure, connect its power supply to the internal 120VAC power outlet. A cable gland and cable grommets on the enclosure allow cables to be connected to the device. Simply plug the enclosure's 5 foot power cord into a power outlet and you are up and running.

RF Transparent Design

The non-metallic design of the enclosure and bracket is RF transparent and will not interfere with the WiFi signal range or coverage pattern.

Complete with Cable Grommets and Glands and Wire Management Straps


For convenience, the included accessory kit contains cable grommets and glands, wall anchors, zip ties, hook-and-loop wire management straps, door locking key and more.

Multiple Mounting Options

This enclosure features (4) external mounting feet which can be used for wall mounting or with our optional pole mounting kit. Mounting points are also provided inside the enclosure. These can be easily drilled out and used for applications requiring a more secure installation.



Product Photos

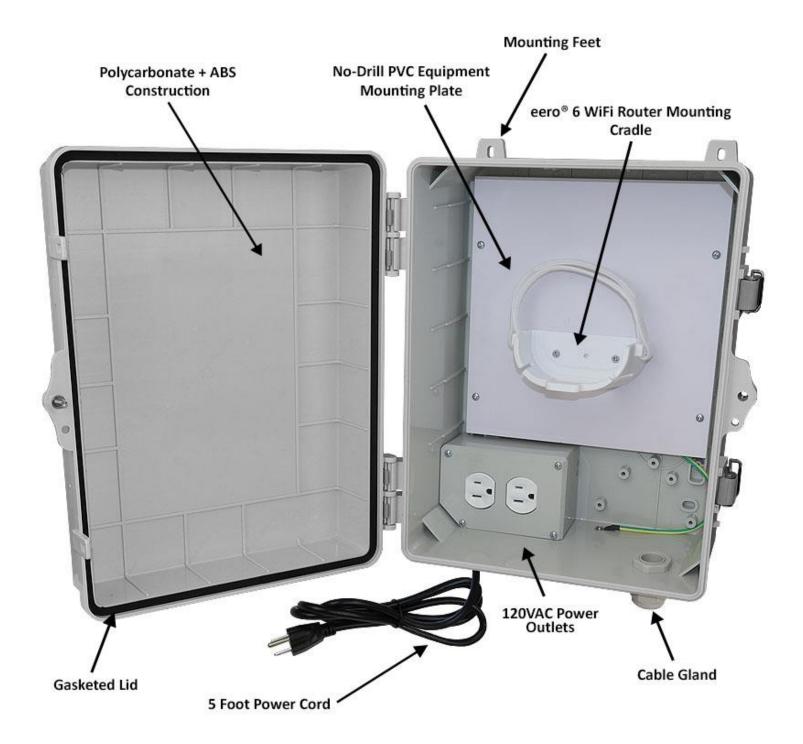



Product Photos



Altelix LLC USA: 866-660-9434 +1 561-660-9434 sales@altelix.com www.altelix.com Copyright (C) 2024 Altelix LLC. All rights reserved. Altelix and the Altelix logo are Trademarks and/or Registered Trademarks of Altelix LLC. Specifications are subject to change without notice. See www.altelix.com for most current information.



Specifications

Material	PC+ABS Polycarbonate / ABS Blend
Color	Gray
Voltage / Max Load	120VAC / 10A @ 120VAC
Outer Dimensions	14.2 x 11.6 x 6.9 Inches (361 x 293 x 176 mm)
Inner Dimensions	9.5 x 8.7 x 5.3 inches (241 x 220 x 134 mm)
Mounting Plate Material	0.40 In. (10 mm) PVC
Weight	6.4 lbs. (2.9 kg)
Power Cord Length	5 Feet (1.5m)
Ratings	Meets NEMA 1, 2, 4, 4X, 12, 13, and IP65, IP66
Flame Rating	Meets UL94-V0
Industry Certifications	CE
Knock-Out Sizes	(3) 0.62 in. (16 mm) (4) 1.02 in. (26 mm) (1) 1.30 in. (33 mm)
Compatible eero® Model	eero® 6+ Mesh Wi-Fi Router (Model R010011)

Accessories

Model	Description
NMKG-240-08	The Altelix NMKG-240-08 Pole Mount Kit easily attaches to the enclosure. This pole mount kit allows the enclosures to be mounted to poles up to 7.6 inches in diameter. The mounting brackets are constructed from 0.04" (1mm) thick galvanized steel for all weather applications.
HN-0004	Replacement door locking key.