



Amazon eero® 6 and Ethernet
Cable Not Included

Features

- Designed to fit the Amazon eero® 6+ (Model R010011) Mesh Wi-Fi 6 Router
- Plug-n-Play Design, Easy to Install
- ABS + Polycarbonate Construction
- Gasketed Lid with Tamper-Proof Locking Screw and Dual Door Latches
- RF Transparent PVC Non-Metallic Equipment Mounting Plate
- Pre-Wired 120VAC Outlet
- Pre-wired 5 Foot Power Cord
- NEMA Type 3, 3R, 3RX / IP55 Rated
- Includes Wall Mount Hardware and Cable Management Straps

eero® is a trademark or registered trademark of Amazon Technologies, Inc

Description

The **Altelix NP14A1C-EER4** is a weatherproof NEMA enclosure designed to provide added security, vandalism and dust protection for the Amazon eero® 6+ Wi-Fi mesh router.

Install Your Amazon eero® 6+ Securely

This sleek enclosure is molded out of UV resistant Polycarbonate + ABS, an industrial grade plastic with greater strength and durability than standard ABS. It features a gasketed hinged door with dual latches, a stainless-steel security screw and provision for padlock. Integrated mounting feet simplify installation. It meets or exceeds NEMA 3, 3R, 3RX and IP55.

Amazon eero® 6+ Wi-Fi Mesh Router Mount

The NP14A1C-EER4 features a mounting cradle specifically designed for the Amazon eero® 6+ router. Installation is easy, simply slide the router into the mounting cradle. For extra security and installations subject to vibrations, an optional hook and loop strap is provided to secure the router within the mounting cradle. The mounting cradle is designed so that it will not interfere with any of the ports on the eero® 6+ such as power and Ethernet.

Plug and Play Setup

The NP14A1C-EER4 enclosure provides easy plug-n-play installation. Once the router is securely mounted inside the enclosure, connect its power supply to the internal 120VAC power outlet. A cable gland and cable grommets on the enclosure allow cables to be connected to the device. Simply plug the enclosure's 5 foot power cord into a power outlet and you are up and running.

RF Transparent Design

The non-metallic design of the enclosure and bracket is RF transparent and will not interfere with the WiFi signal range or coverage pattern.


Complete with Cable Grommets and Glands and Wire Management Straps

For convenience, the included accessory kit contains cable grommets and glands, wall anchors, zip ties, hook-and-loop wire management straps, door locking key and more.

Mounting

The enclosure can be wall mounted using the included wall anchors. An optional pole mount kit is also available for installation on poles up to 8 inches in diameter.

Product Photos

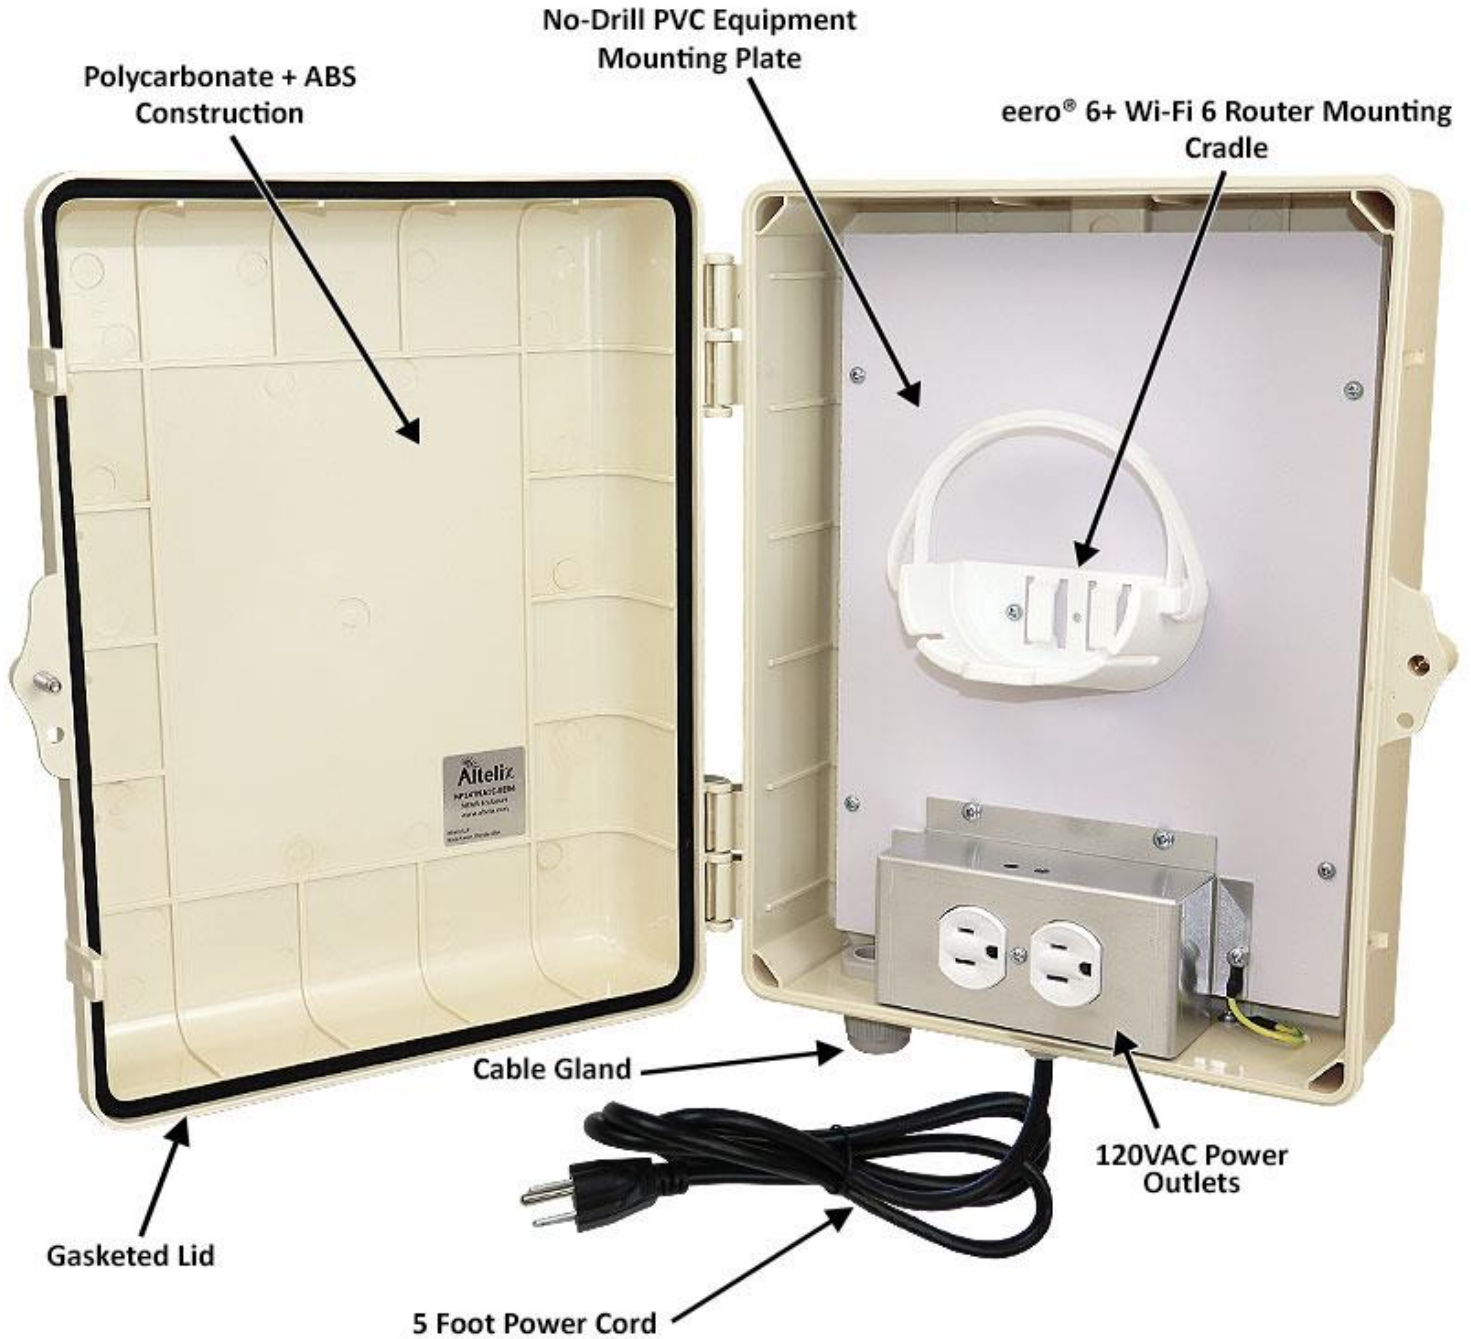

Product Photos





Specifications

Material	Polycarbonate + ABS
Available Colors	Gray, Black, Light Ivory, OD Green
Voltage / Max Load	120VAC / 10A @ 120V
Outer Dimensions (Height x Width x Depth)	13.1 x 10.2 x 4.7 Inches (334 x 259 x 120 mm)
Mounting Plate Material	0.25 In. (6.4mm) PVC
Weight	4.1 lbs. (1.8 kg)
Power Cord Length	5 Feet (1.5m)
Ratings	Meets NEMA 1, 2, 3, 3R, 3RX and IP55
Flame Rating	Meets UL94-V0
Compatible eero® Model	eero® 6+ Mesh Wi-Fi Router (Model R010011)



Accessories

Model		Description
NMKG-240-08		The Altelix NMKG-240-08 Pole Mount Kit easily attaches to the enclosure. This pole mount kit allows the enclosures to be mounted to poles up to 7.6 inches in diameter. The mounting brackets are constructed from 0.04" (1mm) thick galvanized steel for all weather applications.
HN-0004		Replacement door locking key.