



TP-Link® AC1350 and Cable Not Included

## Features

- Designed to fit the TP-Link® AC1350 EAP225 V3 Access Point and PoE Adapter
- Dual 3" Vents with rain shields and screens
- Unique cable gland allows you to feed a pre-terminated Ethernet cable into the enclosure
- Weatherproof and UV stable durable Polycarbonate + ABS construction
- Gasketed lid with tamper-proof locking screw and dual door latches
- RF transparent design will not affect wireless signal range or coverage pattern
- NEMA Type 3R, 3RX / IP24 Rated
- Includes access point removal tool, wall mount hardware and cable grommets

TP-Link® is a trademark or registered trademark of TP-Link, Corp.

## Description

---

The **Altelix Vented TP-Link® Enclosure** is a weatherproof enclosure designed to provide indoor or outdoor protection for the TP-Link® AC1350 EAP225 V3 access point. This non-powered enclosure is ideal for installations powering the TP-Link® EAP225 via PoE only.

### Install Your TP-Link® Access Point Securely Outdoors

This sleek enclosure is molded from weatherproof UV resistant PC+ABS, a high tech thermoplastic blend of polycarbonate and ABS, for extreme durability. The door features reinforced hinges, dual latches and a tamper-proof locking screw with key to secure the enclosure. The wall mounting screws are concealed securely within the enclosure to prevent tampering. There is also a provision for a padlock. Two 3" inch air vents with rain shields and screens provide ventilation for the TP-Link® EAP225. This enclosure meets or exceeds NEMA 3R, 3RX and IP24.

### Easy Setup

The equipment mounting plate of the NP14V-TPL1 is pre-drilled to accept the mounting bracket that comes with the TP-Link® EAP225. Simply attach the mounting bracket to the plate and then install the access point. Once the TP-Link® EAP225 is securely mounted inside the enclosure, a special cable gland on the enclosure will allow a terminated Ethernet cable to be connected to the access point. If for any reason the access point needs to be removed, a handy removal tool is included with the enclosure which disengages the access point from the mounting bracket. This removal tool mounts to the plate so it is always available for use.

### RF Transparent Design

The non-metallic design of the enclosure and bracket is RF transparent and will not interfere with the WiFi signal range or coverage pattern.


### Mounting

The NP17VA1C-TPL1 enclosure can be wall mounted using the included wall anchors. An optional pole mount kit is also available for mounting on poles or fence posts.



## Product Photos


---

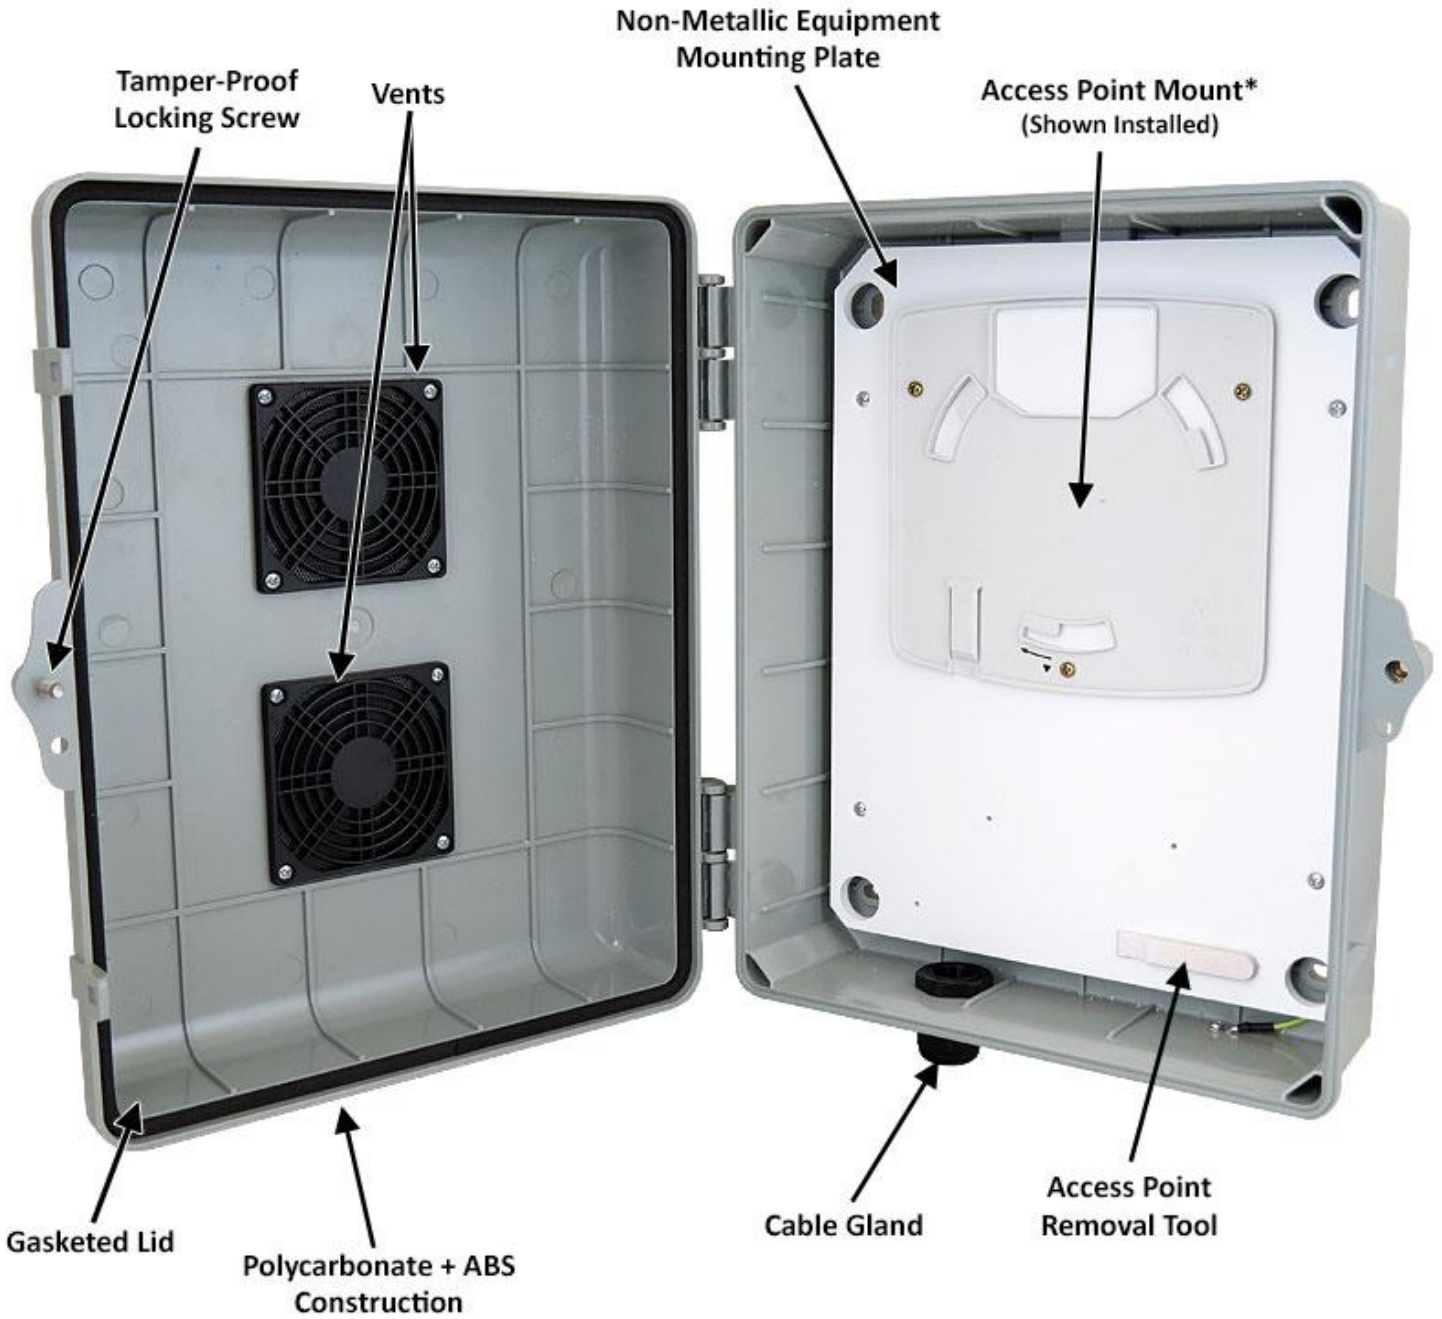

**\*Note: Access Point mount not included with enclosure.**

Product Photos

---

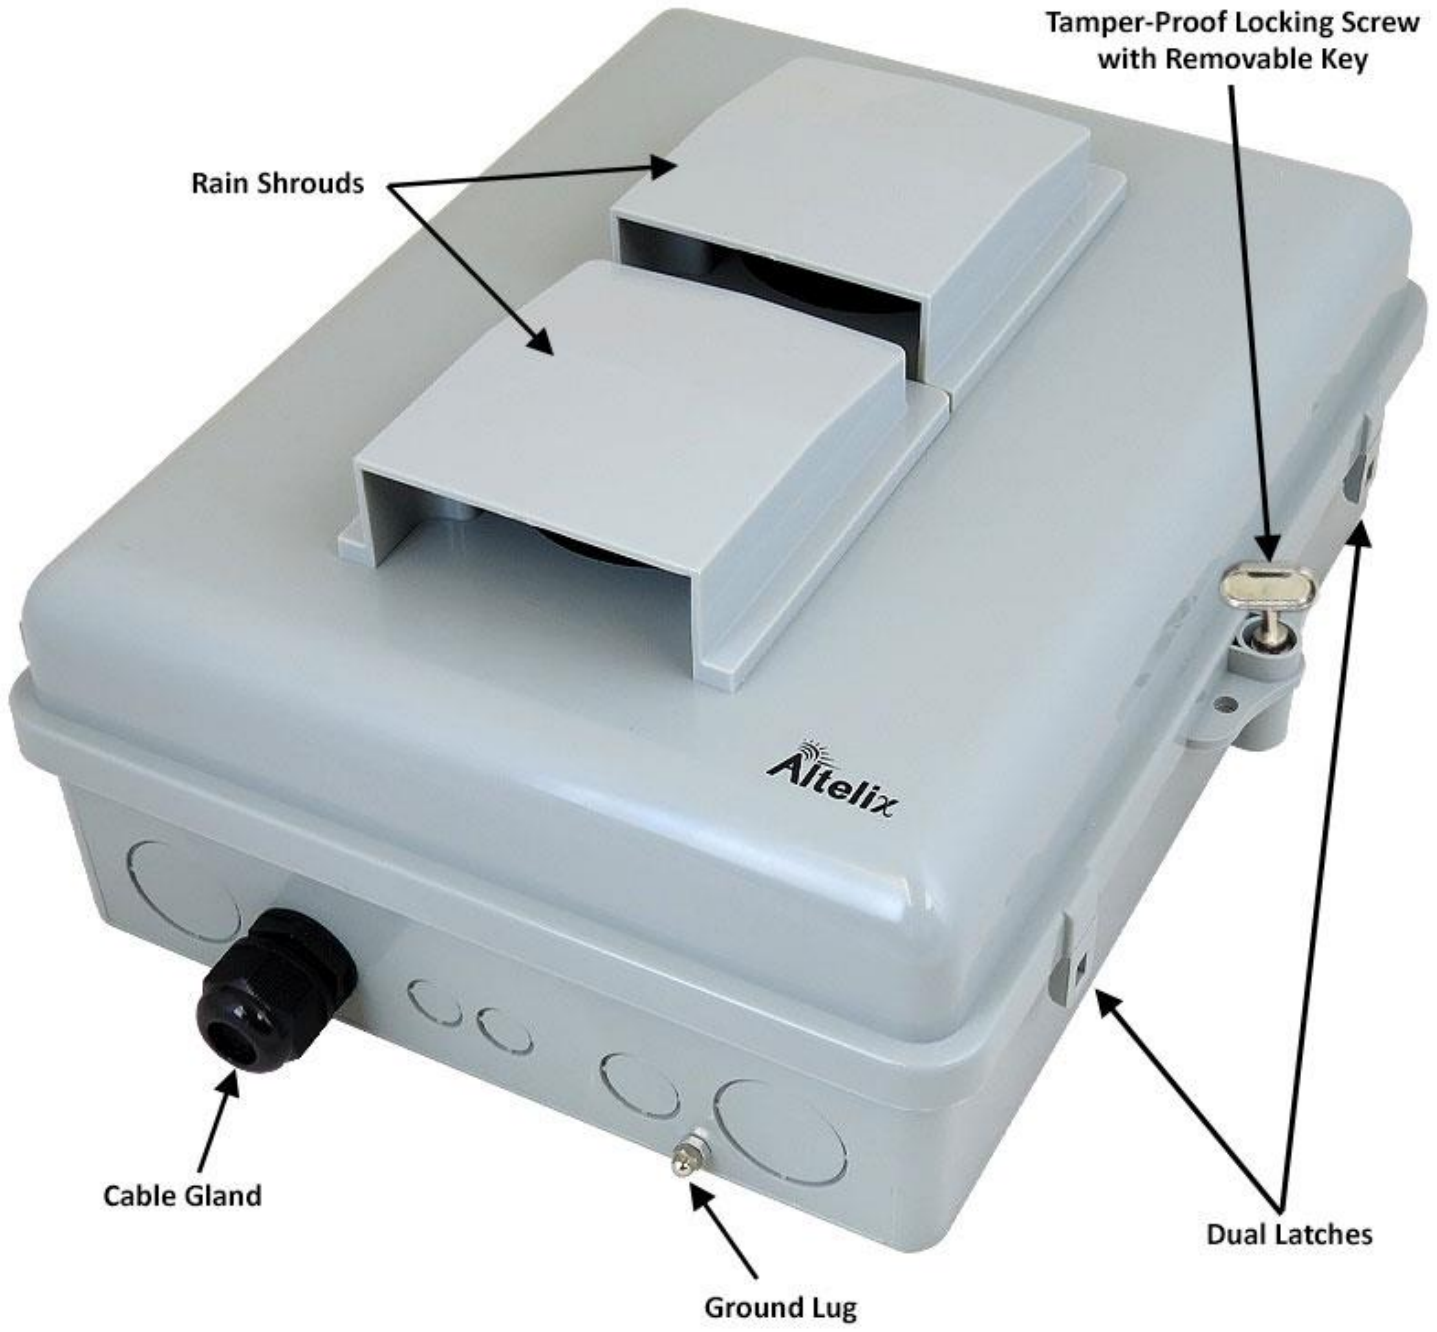



## Specifications

---

<b>Material</b>	PC+ABS Polycarbonate / ABS Blend
<b>Available Colors</b>	Gray, Black, OD Green, Light Ivory
<b>Outer Dimensions</b> (Height x Width x Depth)	13.4 x 11.5 x 6.7 Inches (340 x 293 x 159 mm)
<b>Mounting Plate Material</b>	0.25 In. (6.4 mm) PVC
<b>Weight</b>	3.5 lbs. (1.6 kg)
<b>Ratings</b>	NEMA Type 3R, 3RX / IP24
<b>Flame Rating</b>	Meets UL94-V0
<b>Compatible TP-Link® Model</b>	AC1350 EAP225 V3 Access Point

## Available Colors

---

