

Altelix Vented Weatherproof Enclosure for Amazon eero® 6+ Mesh Wi-Fi 6 Router with 120VAC Outlet and Power Cord



Amazon eero® 6+ and Ethernet Cable Not Included

## Features

- Designed to fit the Amazon eero® 6+ (Model R010011) Mesh Wi-Fi 6 Router
- Plug-and-Play design, easy to install
- Dual 3" Vents with rain shields and screens
- RF transparent design will not affect wireless signal range or coverage pattern
- Pre-wired 120VAC power outlet and pre-wired 5 foot 3-prong power cord
- Weatherproof and UV stable durable Polycarbonate + ABS construction
- Gasketed lid with tamper-proof locking screw and dual stainless steel door latches
- NEMA Type 3R, 3RX / IP24 Rated
- Includes wall mount hardware and cable grommets

Amazon eero® is a trademark or registered trademark of Amazon Technologies, Inc.

## Description

---

The **Altelix NP14VFA1C-EER4** is a vented weatherproof enclosure designed to provide added security, vandalism and protection from harsh environments, while allowing ventilation for the Amazon eero® 6+ Wi-Fi mesh router. It features two 3" inch air vents with rain shields and screens.

### Install Your Amazon eero® 6+ Securely

This sleek enclosure is molded out of UV resistant Polycarbonate + ABS, an industrial grade plastic with greater strength and durability than standard ABS. It features a gasketed hinged door with dual stainless steel latches, a stainless-steel security screw and provision for padlock. Integrated mounting feet simplify installation. It meets or exceeds NEMA 3R, 3RX and IP24.

### Amazon eero® 6+ Wi-Fi Mesh Router Mount

The NP14VA1C-EER4 features a mounting cradle specifically designed for the Amazon eero® 6+ WiFi Router. Installation is easy, simply slide the router into the mounting cradle. For extra security and installations subject to vibrations, an optional hook and loop strap is provided to secure the router within the mounting cradle. The mounting cradle is designed so that it will not interfere with any of the ports on the eero® 6+ such as power and Ethernet.

### Plug and Play Setup

The NP14VA1C-EER4 enclosure provides easy plug-n-play installation. Once the eero® 6+ is securely mounted inside the enclosure, connect its power supply to the internal 120VAC power outlet. A cable gland and cable grommets on the enclosure allow cables to be connected to the device. Simply plug the enclosure's 5 foot power cord into a power outlet and you are up and running.

### RF Transparent Design

The non-metallic design of the enclosure and bracket is RF transparent and will not interfere with the WiFi signal range or coverage pattern.

### Complete with Cable Grommets and Glands and Wire Management Straps


For convenience, the included accessory kit contains cable grommets and glands, wall anchors, zip ties, hook-and-loop wire management straps, door locking key and more.

### Multiple Mounting Options

This enclosure features (4) external mounting feet which can be used for wall mounting or with our optional pole mounting kit. Mounting points are also provided inside the enclosure. These can be easily drilled out and used for applications requiring a more secure installation.


## Product Photos

---

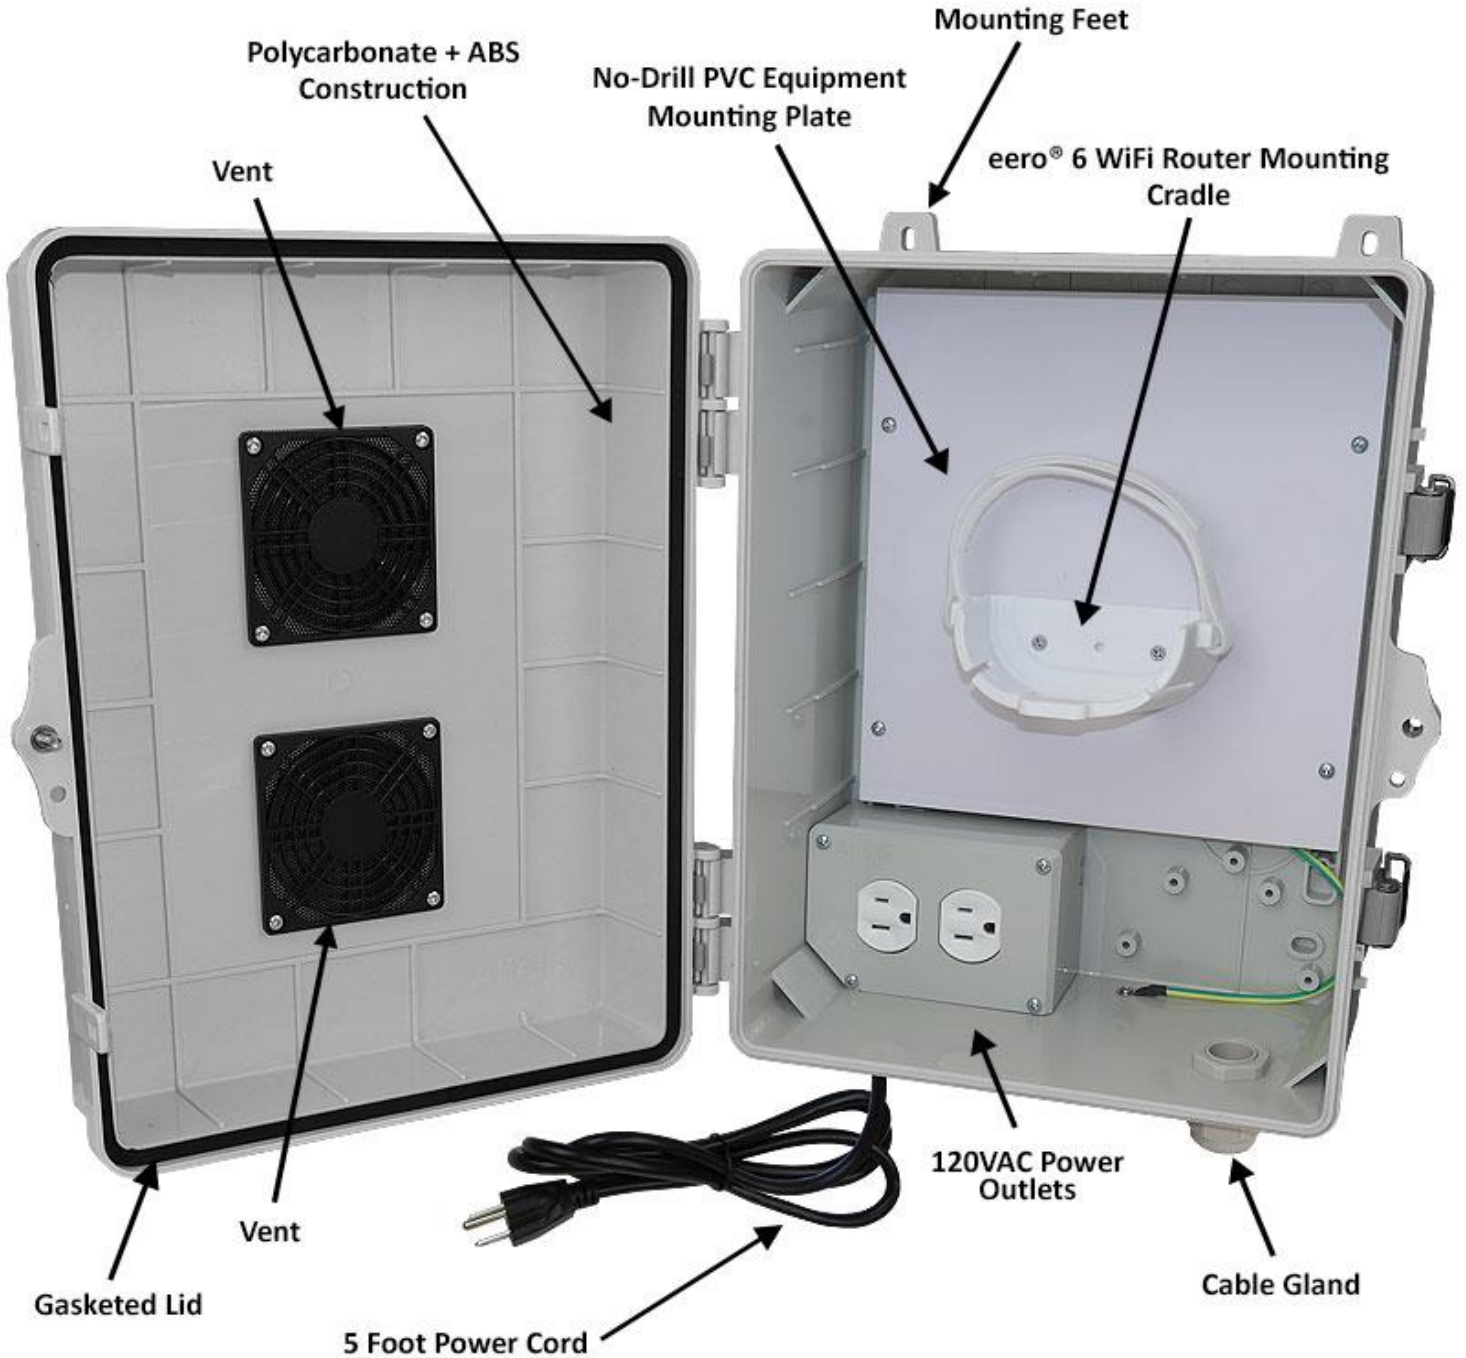

Product Photos

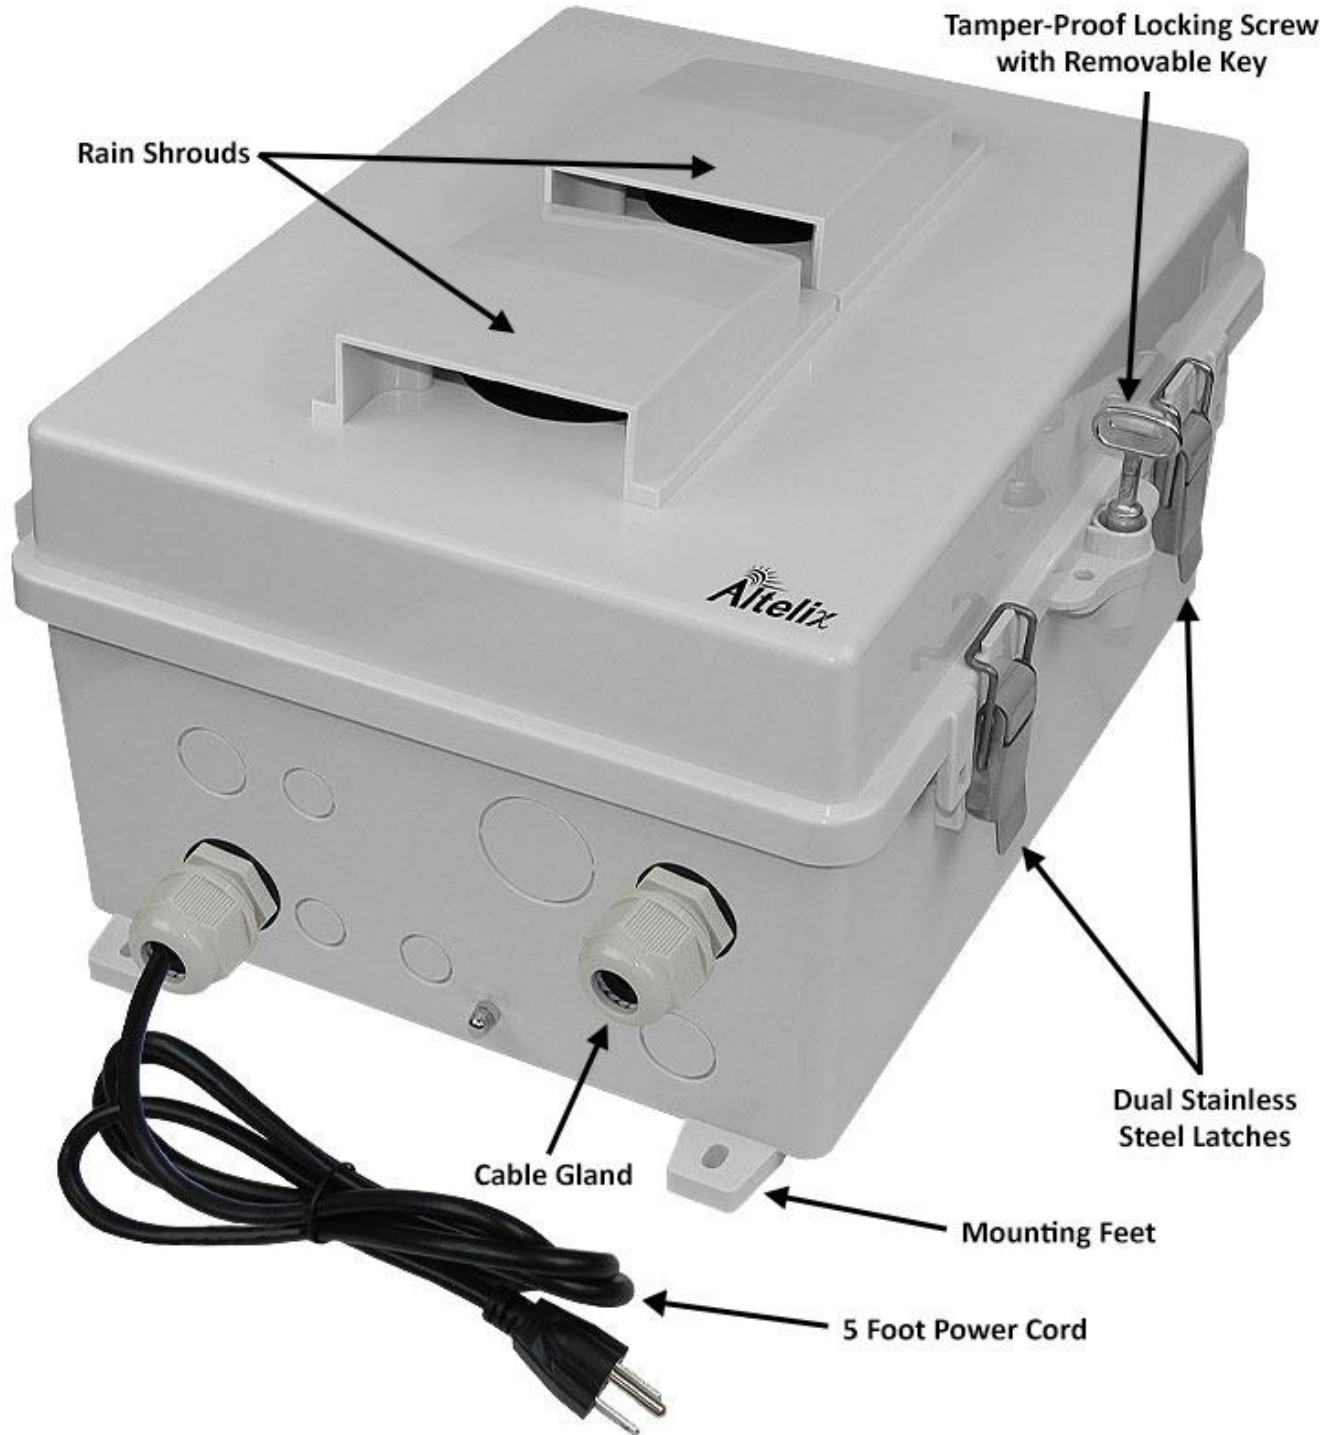

---



## Specifications

<b>Material</b>	PC+ABS Polycarbonate / ABS Blend
<b>Color</b>	Gray
<b>Voltage / Max Load</b>	120VAC / 10A @ 120VAC
<b>Outer Dimensions</b>	14.2 x 11.6 x 8.2 Inches (361 x 293 x 208 mm)
<b>Inner Dimensions</b>	9.5 x 8.7 x 5.2 inches (241 x 220 x 132 mm)
<b>Mounting Plate Material</b>	0.40 In. (10 mm) PVC
<b>Weight</b>	6.4 lbs. (2.9 kg)
<b>Power Cord Length</b>	5 Feet (1.5m)
<b>Ratings</b>	NEMA Type 3R, 3RX / IP24
<b>Flame Rating</b>	Meets UL94-V0
<b>Industry Certifications</b>	CE
<b>Knock-Out Sizes</b>	(3) 0.62 in. (16 mm) (4) 1.02 in. (26 mm) (1) 1.30 in. (33 mm)
<b>Compatible eero® Model</b>	eero® 6+ Mesh Wi-Fi Router (Model R010011)

## Accessories

Model		Description
<b>NMKG-240-08</b>		The Altelix NMKG-240-08 Pole Mount Kit easily attaches to the enclosure. This pole mount kit allows the enclosures to be mounted to poles up to 7.6 inches in diameter. The mounting brackets are constructed from 0.04" (1mm) thick galvanized steel for all weather applications.
<b>HN-0004</b>		Replacement door locking key.