



Amazon eero® PoE 6 Not Included

Features

- Designed to fit the Amazon eero® PoE 6 (Model T010001) Wi-Fi 6 Access Point
- Dual 3" Vents with rain shields and screens
- Unique cable glands allow you to feed pre-terminated Ethernet cables into the enclosure
- Weatherproof and UV stable durable Polycarbonate + ABS construction
- Gasketed lid with tamper-proof locking screw and dual door latches
- RF transparent design will not affect wireless signal range or coverage pattern
- NEMA Type 3R, 3RX / IP24 Rated
- Includes wall mount hardware and cable grommets

Amazon eero® is a trademark or registered trademark of Amazon Technologies, Inc.

Description

The **Altelix Vented Amazon eero® PoE 6 Enclosure** is a weatherproof enclosure designed to provide indoor or outdoor protection for the Amazon eero® PoE 6 Wi-Fi 6 access point. This non-powered enclosure is ideal for installations powering the Amazon eero® PoE 6 via PoE only.

Easy Setup

The equipment mounting plate of the NP14VM-EER5 is pre-drilled to except the wall mounting bracket that is included with the Amazon eero® PoE 6. Simply attach the wall mounting bracket to the plate and then install the access point. Once the PoE 6 is securely mounted inside the enclosure, special cable glands on the enclosure will allow pre-terminated Ethernet cables to be connected to the access point.

Install Your PoE 6 Access Point Securely Outdoors

This sleek enclosure is molded from weatherproof UV resistant PC+ABS, a high-tech thermoplastic blend of polycarbonate and ABS, for extreme durability. The door features reinforced hinges, dual latches and a tamper-proof locking screw with key to secure the enclosure. The wall mounting screws are concealed securely within the enclosure to prevent tampering. There is also a provision for a padlock. Two 3" inch air vents with rain shields and screens provide ventilation for the Amazon eero® PoE 6. This enclosure meets or exceeds NEMA 3R, 3RX and IP24.

RF Transparent Design

The non-metallic design of the enclosure and equipment mounting plate is RF transparent and will not interfere with the WiFi signal range or coverage pattern.


Mounting

The NP17VM-EER5 enclosure can be wall mounted using the included wall anchors. An optional pole mount kit is also available for mounting on poles or fence posts.


Specifications

Material	PC+ABS Polycarbonate / ABS Blend
Available Colors	Gray, Black, OD Green, Light Ivory
Outer Dimensions (Height x Width x Depth)	13.4 x 11.5 x 6.7 Inches (340 x 293 x 159 mm)
Mounting Plate Material	0.25 In. (6.4 mm) PVC
Weight	3.5 lbs. (1.6 kg)
Ratings	NEMA Type 3R, 3RX / IP24
Flame Rating	Meets UL94-V0
Compatible eero® Model	eero® PoE 6 - Model #T010001

Product Photos

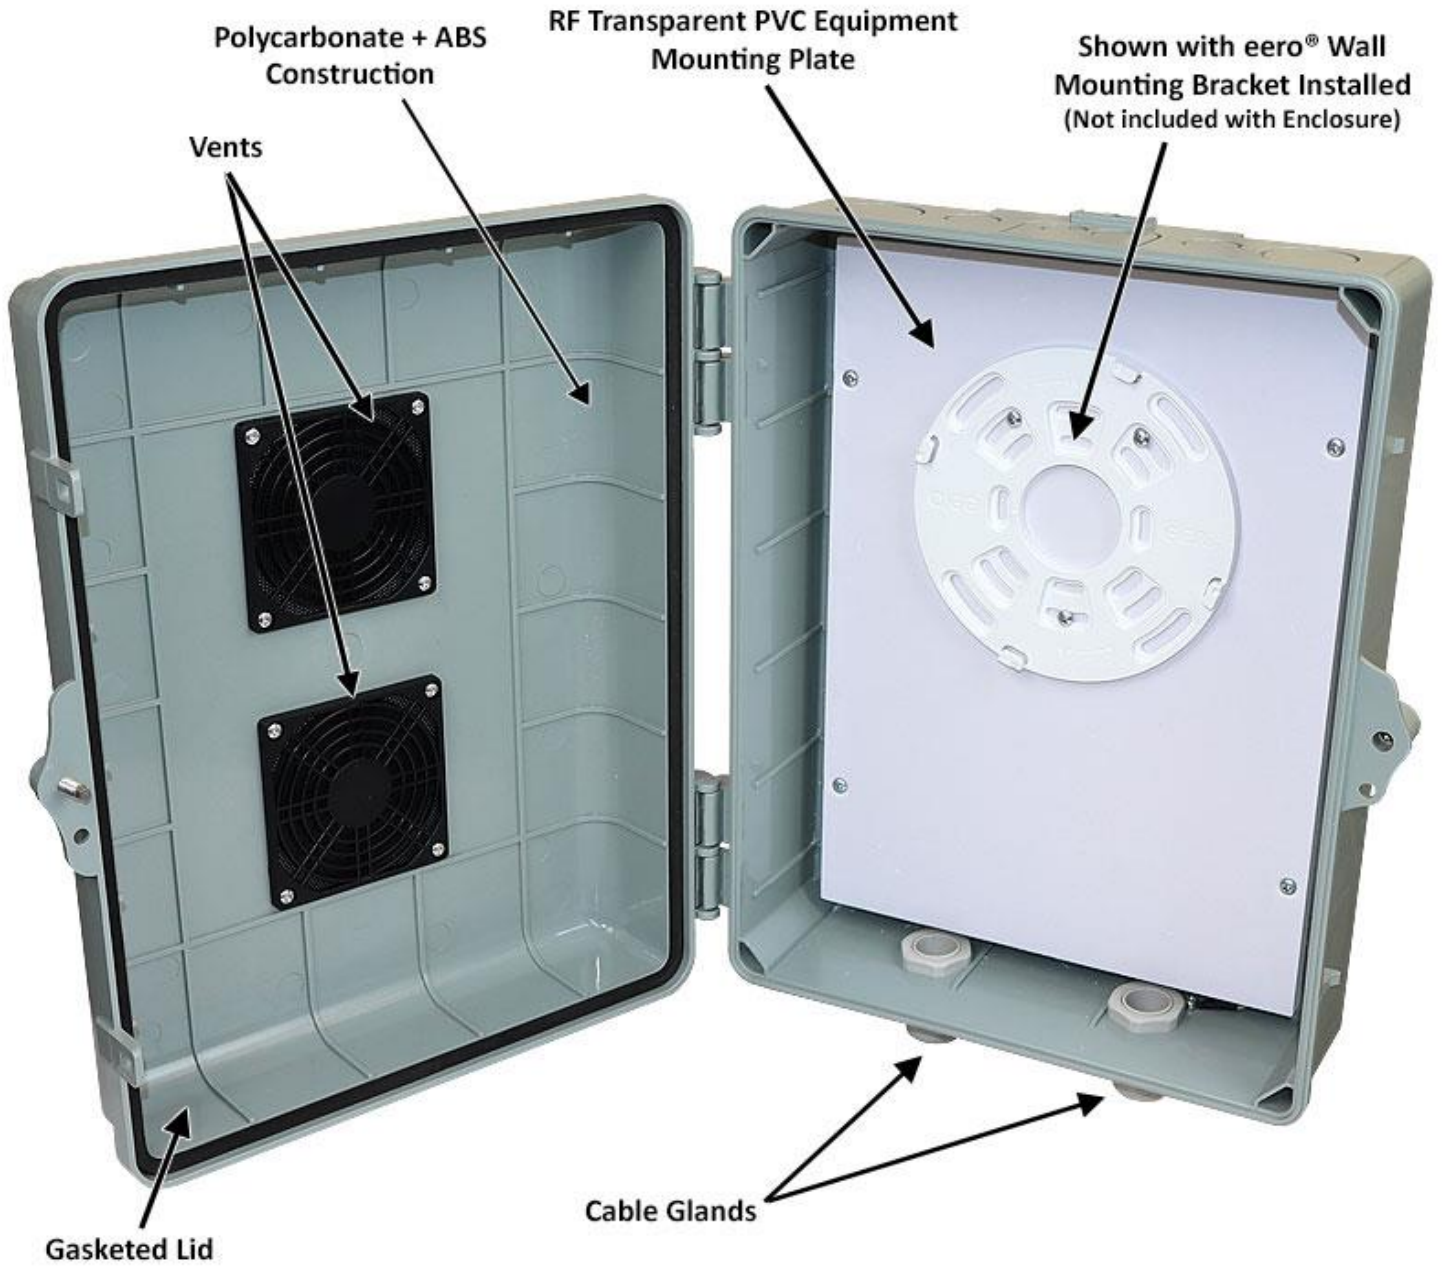

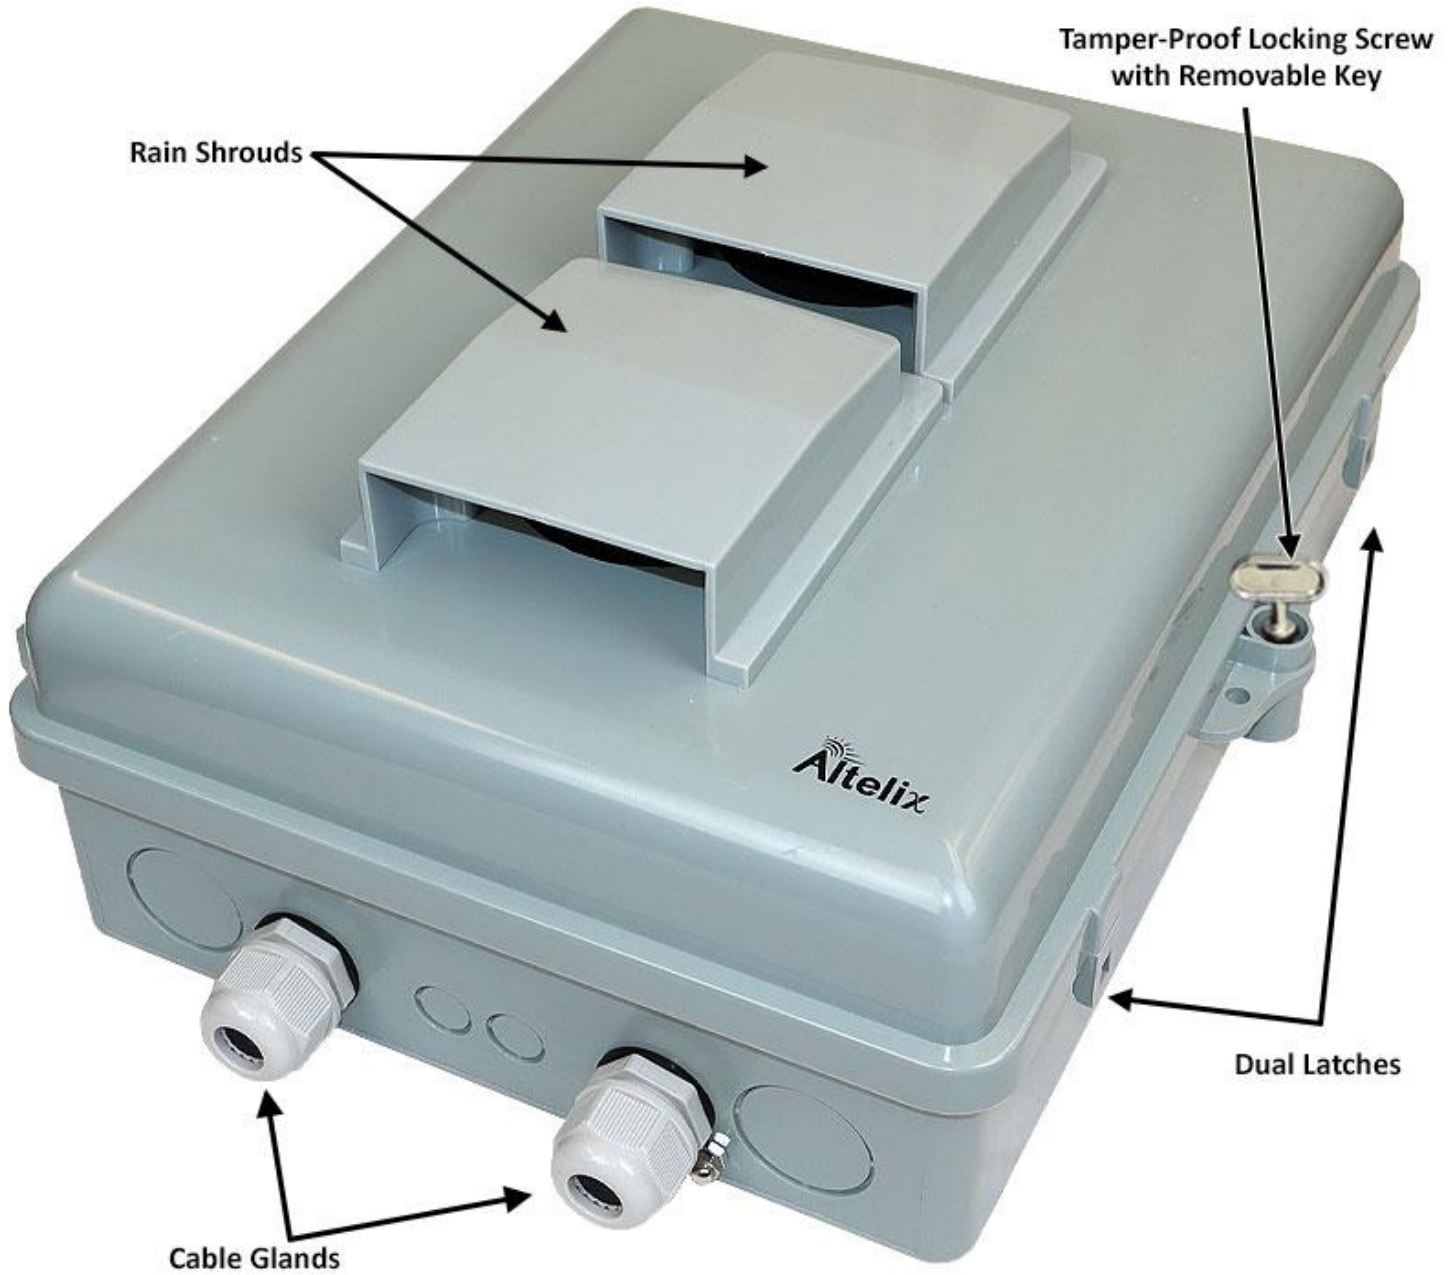

Product Photos



Available Colors



Accessories

Model		Description
<p>NMKG-240-08</p>		<p>The Altelix NMKG-240-08 Pole Mount Kit easily attaches to the enclosure. This pole mount kit allows the enclosures to be mounted to poles up to 7.6 inches in diameter. The mounting brackets are constructed from 0.04" (1mm) thick galvanized steel for all weather applications.</p>
<p>HN-0004</p>		<p>Replacement door locking key.</p>