



Alarm.com® Z-Wave Hub Not Included

Features

- Designed to fit the Alarm.com® Cellular Z-Wave Hub and PointCentral® Hub
- Plug-n-Play Design, Easy to Install
- Dual 3" Vents with Rain Shields to Expel Heat
- Features a RF Transparent Non-Metallic Equipment Mounting Plate
- ABS + Polycarbonate Construction
- Gasketed Lid with Tamper-Proof Locking Screw and Dual Door Latches
- RF Transparent PVC Non-Metallic Equipment Mounting Plate
- Pre-Wired 120VAC Outlet with 5 Foot Power Cord
- NEMA Type 3R, 3RX / IP24 Rated
- Includes Wall Mount Hardware and Cable Management Straps

Alarm.com® and PointCentral® are trademarks or registered trademarks of Alarm.com, Inc.

Description

The **Altelix Cellular Z-Wave Hub Enclosure** is a vented weatherproof enclosure designed to provide added security from vandalism and protection from harsh environments, while allowing ventilation for the Alarm.com® or PointCentral® Hubs. It features two 3" inch air vents with rain shields and screens. By installing one of these hubs inside this enclosure, property managers can be rest assured that this equipment will not be tampered with.

Plug and Play Setup

This Altelix enclosure provides easy plug-n-play installation. Once the enclosure is mounted, install hub into the mounting bracket and plug its power supply into the pre-wired 120VAC power outlet. Then plug the enclosure's 5 foot power cord into a 120VAC power outlet and you are up and running.

RF Transparent Design

The non-metallic design of the enclosure and equipment mounting plate is RF transparent and will not interfere with the wireless signal range or coverage pattern of the installed hubs.

Compatible Models

This enclosure is compatible with the following models:

- Alarm.com® Cellular Z-Wave Hub - Model #ADC-NK-200T
- PointCentral® Hub - Model #ADC-NK-100T-LTE

Rugged Polycarbonate + ABS Construction

This sleek enclosure is molded out of UV resistant Polycarbonate + ABS, an industrial grade plastic with greater strength and durability than standard ABS. It features a gasketed hinged door with dual latches, a stainless steel security screw and provision for padlock. Integrated mounting feet simplify installation. It meets or exceeds NEMA 3R, 3RX and IP24.


Complete with Cable Grommets and Glands and Wire Management Straps

For convenience, the included accessory kit contains cable grommets and glands, wall anchors, zip ties, hook-and-loop wire management straps, door locking key and more. A pre-installed cable grommet is available if any additional cables need to be installed in the enclosure.

Mounting

The enclosure can be wall mounted using the included wall anchors. An optional pole mount kit is also available for installation on poles up to 8 inches in diameter.

Product Photos

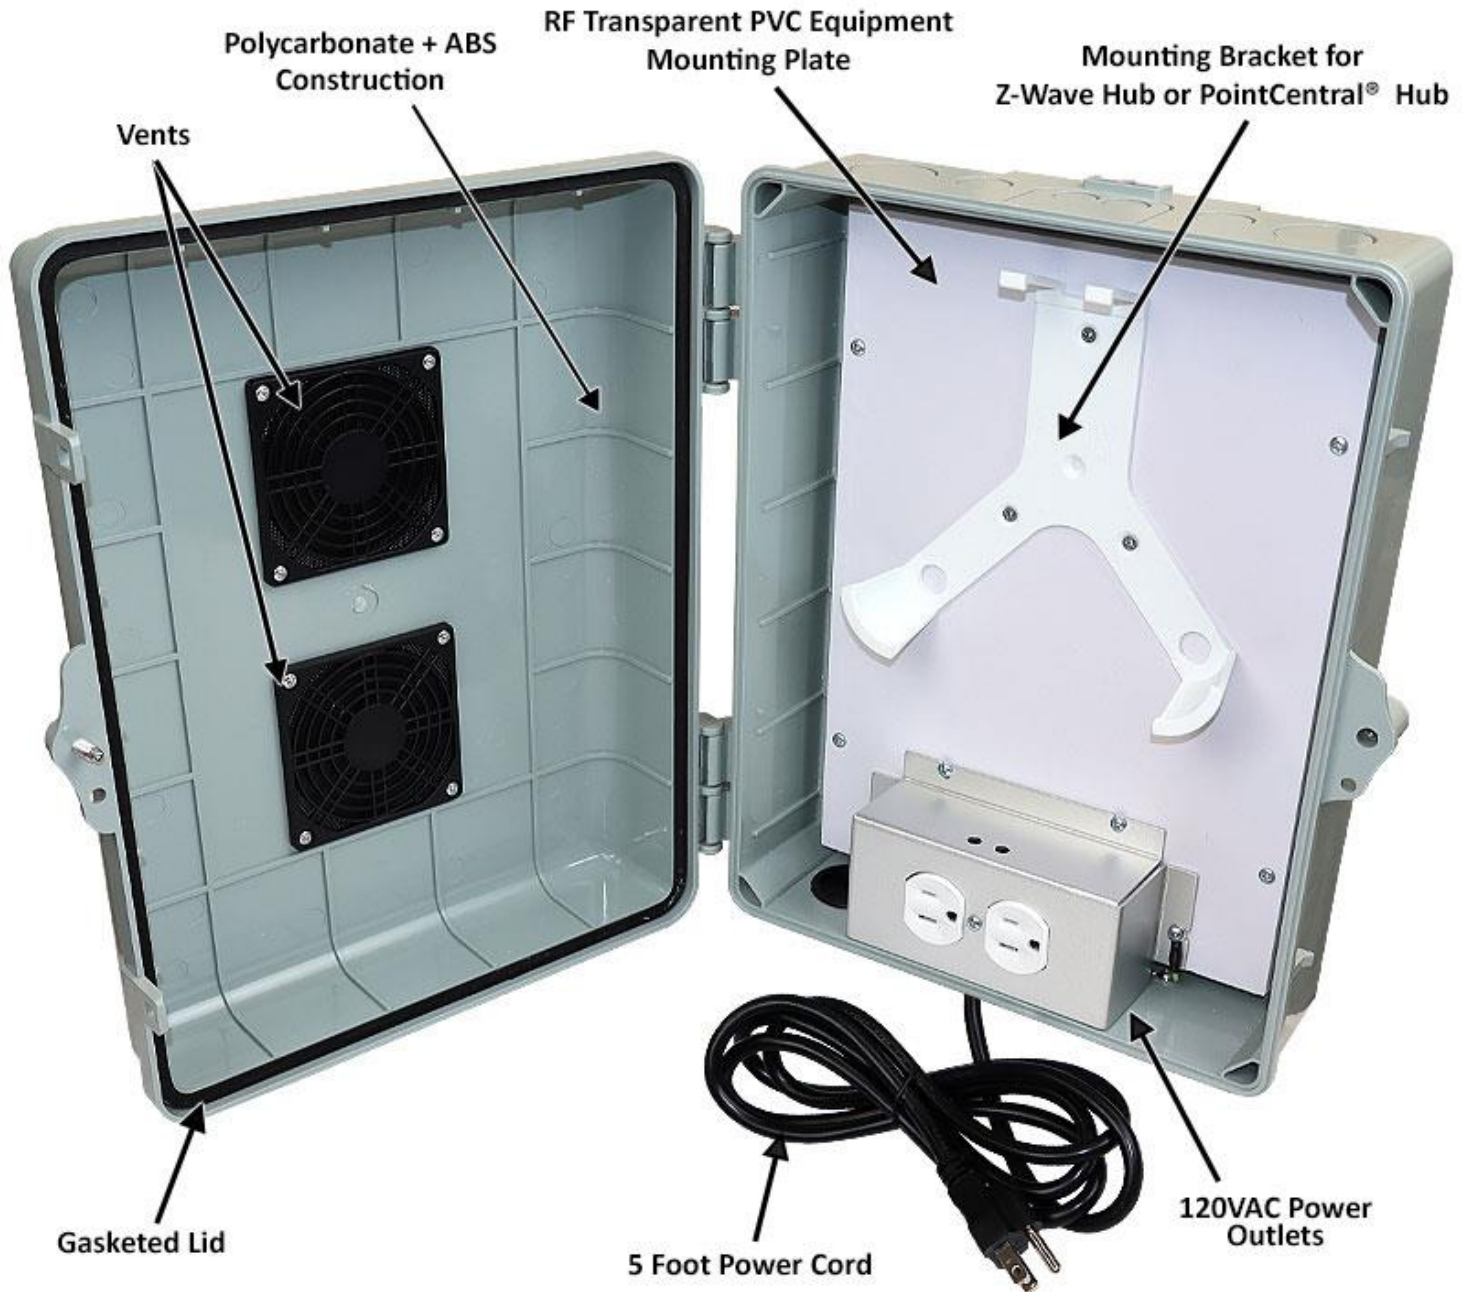

Product Photos



Specifications

Material	Polycarbonate + ABS
Available Colors	See Below
Voltage / Max Load	120VAC / 10A @ 120V
Outer Dimensions (Height x Width x Depth)	13.4 x 11.5 x 6.3 Inches (340 x 293 x 160 mm)
Mounting Plate Material	0.25 In. (6.4mm) PVC
Weight	4.1 lbs. (1.8 kg)
Power Cord Length	5 Feet (1.5m)
Ratings	NEMA Type 3R, 3RX / IP24
Flame Rating	Meets UL94-V0
Compatible Hub Models	Alarm.com® Cellular Z-Wave Hub - Model #ADC-NK-200T PointCentral® Hub - Model #ADC-NK-100T-LTE





NP14TNVMA1C-ALM1

NP14TGYVMA1C-ALM1

NP14GNVMA1C-ALM1

NP14BKVMA1C-ALM1

Accessories

Model		Description
NMKG-240-08	 The image shows a silver metal enclosure with two metal brackets attached to its top and bottom edges. Each bracket consists of a flat metal plate with a curved section that would wrap around a pole.	The Altelix NMKG-240-08 Pole Mount Kit easily attaches to the enclosure. This pole mount kit allows the enclosures to be mounted to poles up to 7.6 inches in diameter. The mounting brackets are constructed from 0.04" (1mm) thick galvanized steel for all weather applications.
HN-0004	 The image shows a small, silver metal key with a U-shaped head and a cylindrical shaft.	Replacement door locking key.