


17x14x6 Polycarbonate + ABS Indoor / Outdoor RF Transparent Enclosure with PVC Non-Metallic Equipment Mounting Plate, 120 VAC Outlets & Power Cord

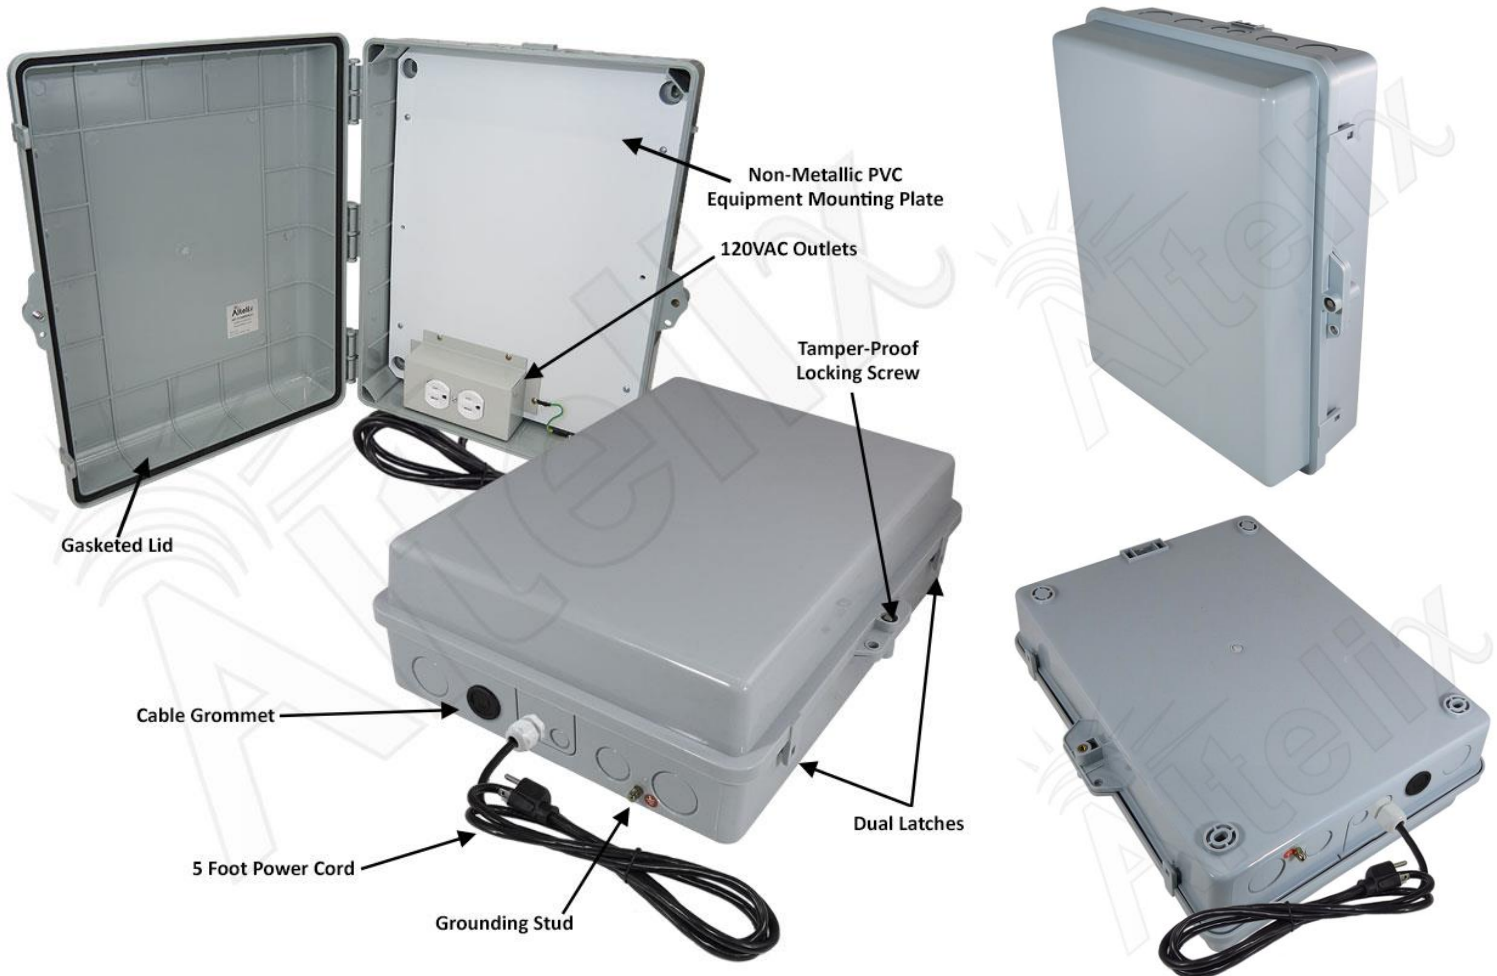

Features

- No Electrical Wiring Required
- Pre-wired 5 foot 3-Prong Power Cord
- (2) Pre-Wired 120VAC Outlets
- PVC Non-Metallic Equipment Mounting Plate
- Weatherproof and UV Stable
- Durable Polycarbonate + ABS
- RF Transparent for Wireless Devices
- Gasketed Lid with Dual Latches
- Tamper-Proof Locking Screw with Key and Provision for Padlock
- Includes Wall Mounting Hardware, Cable Grommets, Zip Ties, Cable Management Loop, Ground Wire
- Knock-Out Holes on Top & Bottom

Description

The **Altelix NP171406MA1C** NEMA enclosure is simple to install because no wiring is required. Simply mount the enclosure and plug the pre-wired 5 foot power cord into a nearby outlet. The non-metallic equipment mounting plate features two pre-wired 120VAC power outlets for your equipment.

Get your project up and running quickly and transition to hard-wired later if needed. The power cord can be easily removed, and the quick-connect terminal strip simplifies hard-wiring by a qualified installer.

Polycarbonate + ABS Protection Built to Last - This enclosure is molded out of UV resistant Polycarbonate + ABS, an industrial grade plastic with greater strength and durability than standard ABS. It features a gasketed hinged door with dual latches, a stainless steel security screw and provision for a padlock. Knock-out holes are provided on the top and bottom. Meets or exceeds NEMA Type 3, 3X and IEC IP55.

RF Transparent Design - The NP171406MA1C is ideal for WiFi applications. The non-metallic design of both the enclosure and equipment mounting plate will not interfere the radio's operation. In addition, mounting radios to PVC equipment mounting plate can be done simply by using self-tapping screws. The size of this enclosure will fit a wide range of popular wireless points on the market.

Complete with Cable Grommets and Wire Management Accessories - This enclosure includes an assortment of cable grommets that can be installed in the knock-out holes for a weather resistant seal. The included accessory kit contains wall anchors, zip ties, wire management loops, ground wire, door locking key and more.

Specifications

Material	Polycarbonate + ABS
Available Colors	Gray, Black, Green, Red, Yellow
Voltage	120VAC
Max Load	10A @ 120VAC
Outer Dimensions (Height x Width x Depth)	16.5 x 13.7 x 5.3 Inches (420 x 348 x 133 mm)
Inner Dimensions* (Height x Width x Depth)	11.5 x 9.0 x 4.0 Inches (292 x 229 x 102 mm)
Mounting Plate Material	0.25 In. (6.4 mm) PVC Foam
Mounting Plate Dimensions	14.9 x 11.2 in. (378 x 284 mm)
Weight	5.8 lbs. (2.6 kg)
Power Cord Length	5 Feet (1.5m)
Ratings	NEMA Type 3, 3X / IP55
Flame Rating	Meets UL94-V0
Knockout Sizes (Diameter)	(4) 0.62 in. (16 mm) (4) 1.02 in. (26 mm) (4) 1.30 in. (33 mm)

*Interior dimensions represent maximum space available for equipment.