


17x14x6 Polycarbonate + ABS Vented Indoor / Outdoor RF Transparent Enclosure with PVC Non-Metallic Equipment Mounting Plate, 120 VAC Outlets & Power Cord

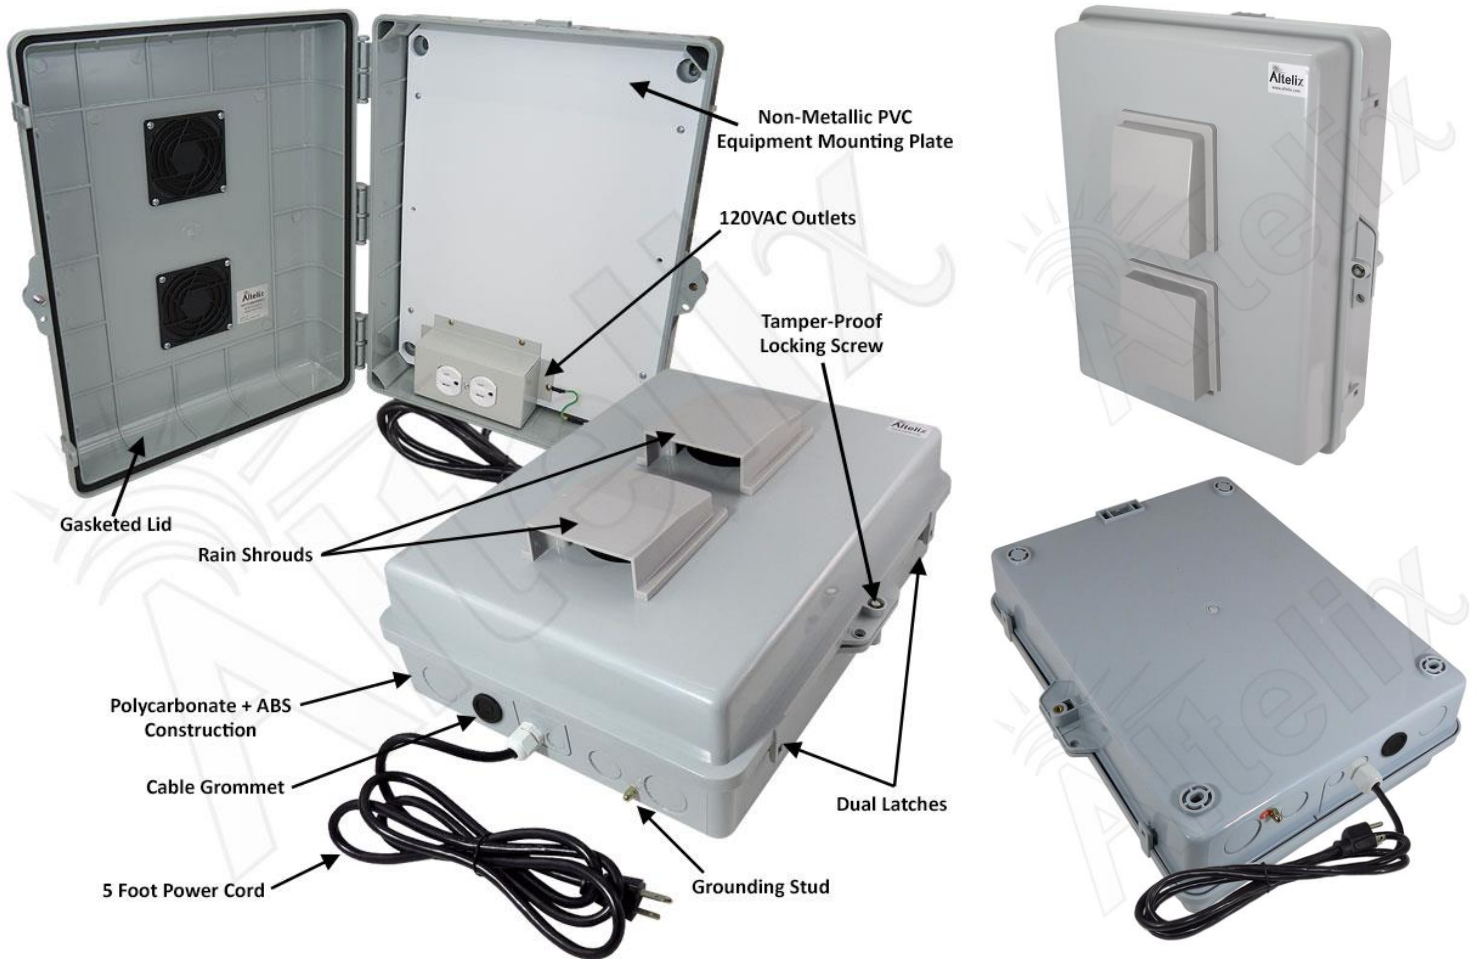

Features

- Dual 3" Vents
- ABS + Polycarbonate Construction
- Gasketed Lid with Tamper-Proof Locking Screw
- Dual Door Latches
- Featured a No-Drill PVC Non-Metallic Equipment Mounting Plate
- Pre-wired 120VAC Outlets
- Pre-wired 5 Foot Power Cord
- NEMA Type 3R, 3RX / IP24 Rated
- Includes Wall Mount Hardware and Cable Grommets

Description

The **Altelix NP171406VMA1C** NEMA enclosure is simple to install because no wiring is required. Simply mount the enclosure and plug the pre-wired 5 foot power cord into a nearby outlet. The non-metallic equipment mounting plate features two pre-wired 120VAC power outlets for your equipment.

Get your project up and running quickly and transition to hard-wired later if needed. The power cord can be easily removed, and the power receptacle hard wired by an electrician or qualified installer.

Polycarbonate + ABS Protection Built to Last - This enclosure is molded out of UV resistant Polycarbonate + ABS, an industrial grade plastic with greater strength and durability than standard ABS. It features a gasketed hinged door with dual latches, a stainless steel security screw and provision for a padlock. Knock-out holes are provided on the top and bottom.

Ventilation - This enclosure features two 3" vents with cleanable screens. Rain shields help prevent rain water from entering the enclosure.

RF Transparent Design - The NP171406VMA1C is ideal for WiFi applications. The non-metallic design of both the enclosure and equipment mounting plate will not interfere with the radio's operation. In addition, mounting radios to the PVC equipment mounting plate can be done simply by using self-tapping screws. The size of this enclosure will fit a wide range of popular wireless points on the market.

Complete with Cable Grommets and Wire Management Accessories - This enclosure includes an assortment of cable grommets that can be installed in the knock-out holes for a weather resistant seal. The included accessory kit contains wall anchors, zip ties, wire management loops, ground wire, door locking key and more.

Specifications

Material	PC+ABS Polycarbonate / ABS Blend
Color	Gray (See Altelix.com for full list of available colors)
Voltage / Max Load	120VAC / 10A @ 120VAC
Outer Dimensions (Height x Width x Depth)	16.5 x 13.7 x 6.5 Inches (420 x 348 x 166 mm)
Inner Dimensions* (Height x Width x Depth)	11.5 x 9.0 x 4.0 Inches (292 x 229 x 102 mm)
Mounting Plate Material	0.25 In. (6.4 mm) PVC
Mounting Plate Dimensions	14.9 x 11.2 in. (378 x 285 mm)
Weight	6.4 lbs. (2.9 kg)
Power Cord Length	5 Feet (1.5m)
Ratings	NEMA Type 3R, 3RX / IP24
Flame Rating	Meets UL94-V0
Knockout Sizes (Diameter)	(4) 0.62 in. (16 mm) (4) 1.02 in. (26 mm) (4) 1.30 in. (33 mm)

*Interior dimensions represent maximum space available for equipment.