


24x24x16 Stainless Steel Weatherproof NEMA Enclosure with 19" Wide 6U Rack, 85°F Turn-On Cooling Fans, 120 VAC 20A Power Outlets and Power Cord

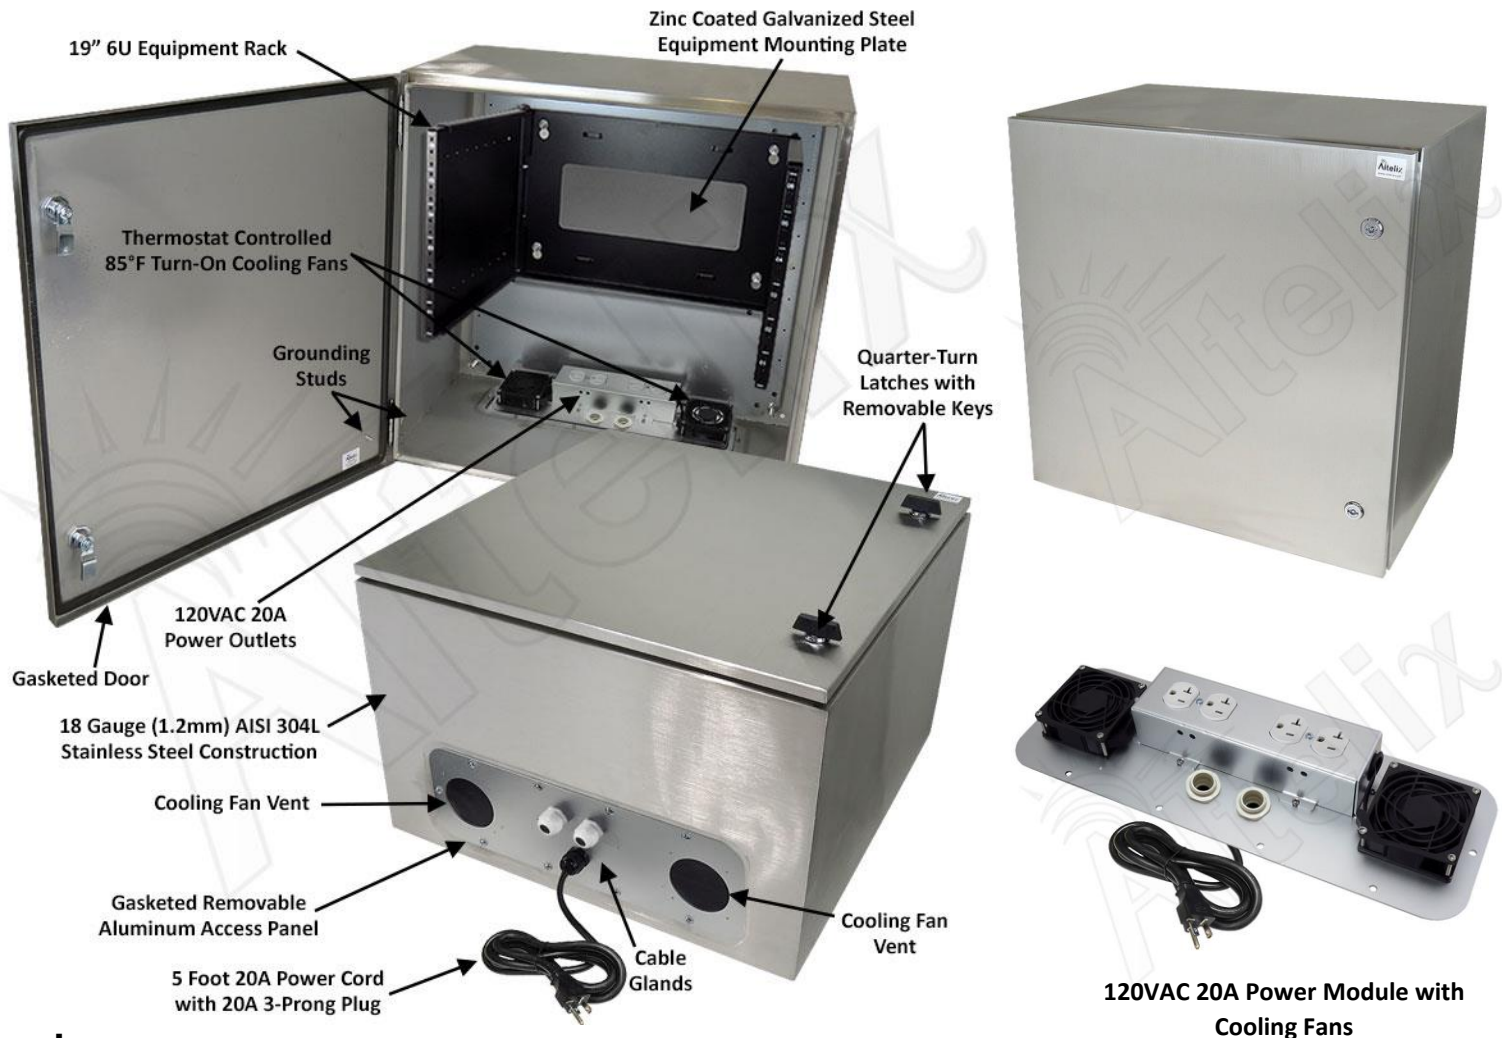

## Features

- Dual Thermostat Controlled 85°F Turn-On Cooling Fans
- Removable Power Module with (4) 120VAC 20A Outlets
- Pre-Wired 5 Ft. 20A Power Cord with 3-Prong Plug
- Heavy Duty Continuous Seam Welded 18 Gauge AISI 304L Stainless Steel Construction
- Meets NEMA 3R, 3RX and IP24
- Includes 19" 6U Rack Frame and Zinc Coated Galvanized Steel Equipment Mounting Plate
- Brushed Natural Finish
- Dual Quarter-Turn Door Latches with Removable Keys
- Optional Keyed Lock Set Latch and Padlock Latch Available

## Description

---

**Construction and Features** - This rugged vented enclosure features continuous seam welded 18 Gauge (1.2mm thick) AISI 304L stainless steel construction. The enclosure door is fully gasketed making this enclosure suitable for use indoors or outdoors. The door features reinforced hinges and dual quarter-turn latches to secure the enclosure. Internal grounding studs are provided on both the door enclosure. Both the enclosure and door feature a brushed natural finish.

**Internal 6U 19" Equipment Rack** - The NX242416VFA1C-20A-85-R6U features a standard 19" 6U equipment rack. It is designed to accommodate a wide range of equipment such as network switches, rack mount audio/video equipment and most other rack mountable equipment. The rack frame mounts to a 18 Gauge (1.2mm thick) galvanized steel plate which can also be drilled and modified by the installer to unique site requirements.

**120VAC 20A Removable Power and Fan Module** - The NX242416VFA1C-20A-85-R6U features a removable power and fan module that attaches to the bottom of the enclosure. Constructed of rugged aluminum, this can be easily removed for servicing and is fully gasketed to ensure a proper seal. This power module features two pre-wired duplex 120VAC 20A power outlets (4 outlets total) and a pre-wired 20A 5 foot power cord with a 3-prong plug, so no additional wiring is required.

**85°F Turn-On Cooling Fans** - The NX242416VFA1C-20A-85-R6U is designed for applications which require the cooling fans to turn on at a lower temperature than our standard fan cooled enclosures. The low noise, high airflow fans help maintain lower internal temperatures by allowing air to be either pushed or pulled through the enclosure. Both fans are wired internally so they do not require the use of the AC outlets leaving them available for internal equipment use.

## Specifications

---

<b>Material</b>	Continuous Seam Welded 18 Gauge (1.2 mm) AISI 304L Stainless Steel
<b>Color</b>	Natural
<b>Voltage / Max. Load</b>	120VAC / 20A @ 120VAC
<b>Cooling Fans Turn-On Temperature</b>	85°F (30°C)
<b>Cooling Fans Turn-Off Temperature</b>	59°F (15°C)
<b>Outer Dimensions</b> (Height x Width x Depth)	23.6 x 23.6 x 15.7 Inches (600 x 600 x 400 mm)
<b>Inner Dimensions*</b> (Height x Width x Depth)	18.0 x 20.0 x 14.1 Inches (457 x 508 x 358 mm)
<b>Rack Frame</b>	19" Width 6U
<b>Equipment Mounting Plate Material</b>	18 Gauge (1.2 mm) Zinc Coated Galvanized Steel
<b>Weight</b>	60.8 lbs. (27.6 kg)
<b>Power Cord Length</b>	5 Feet (1.5m)
<b>Ratings</b>	Meets or Exceeds NEMA 3R, 3RX and IP24

\*Notes: Interior dimensions represent maximum space available for equipment.