



Shown with Cell Phone Installed.
(Cell Phone Not Included)

Features

- Includes IP66 rated waterproof 5V/6W solar powered cell phone charging panel with 10 foot power cord and USB-C or Mirco USB cell phone power plugs
- Magnetic mount allows any cell phone to be installed inside the enclosure
- Weatherproof UV resistant emergency phone label
- ABS + Polycarbonate construction
- Water resistant enclosure design with gasketed Lid and dual door latches
- UV and corrosion resistant
- NEMA Type 1, 2, 3, 3R, 3RX / IP55 rated
- Includes Wall Mount Hardware and cable gland

Description

Install an Emergency Phone Almost Anywhere!

The **Altelix Solar Powered Weatherproof Emergency Cell Phone Enclosure** is ideal for deploying emergency cell phones in outdoor and remote locations without access to power or wired landlines.

New Life for Old Cell Phones

Most old cell phones which are no longer subscribed to or supported by a specific carrier can still call 911 services. This makes them ideal as emergency only phones. The Altelix Solar Powered Emergency Cell Phone Enclosure is designed for just that purpose.

Includes Solar Powered Cell Phone Charger

Included with the TBP14S5-Cell is a high-efficiency 5V/6W solar powered charging panel ideal for charging most cell phones. This panel includes a 90° tilt and 360° swivel base and a 10 foot power cord with a Micro-USB power plug. A Micro-USB to USB-C adapter is also included. The 10 foot power cord allows the solar panel to be mounted away from the enclosure in locations for optimal sunlight exposure. Like our enclosures, this IP66 rated solar panel is built to withstand harsh outdoor conditions including rain and snow.

Rugged Construction for Outdoor Use

This durable NEMA 3X enclosure is molded out of UV resistant PC+ABS, a high-tech blend of polycarbonate and ABS which combines the best qualities of both into a single material. PC+ABS enclosures maintain high toughness, durability and dimensional stability even at extreme cold and hot temperatures. The door is gasketed for use in dusty or wet areas.


Mounting

The enclosure can be wall mounted using the included anchors. The mounting hardware is concealed within the enclosure for a finished appearance and enhanced security. An optional pole mount kit is also available.


Emergency Phone Label

This enclosure features a red and white weatherproof UV resistant Emergency Phone label on the door.

Product Photos

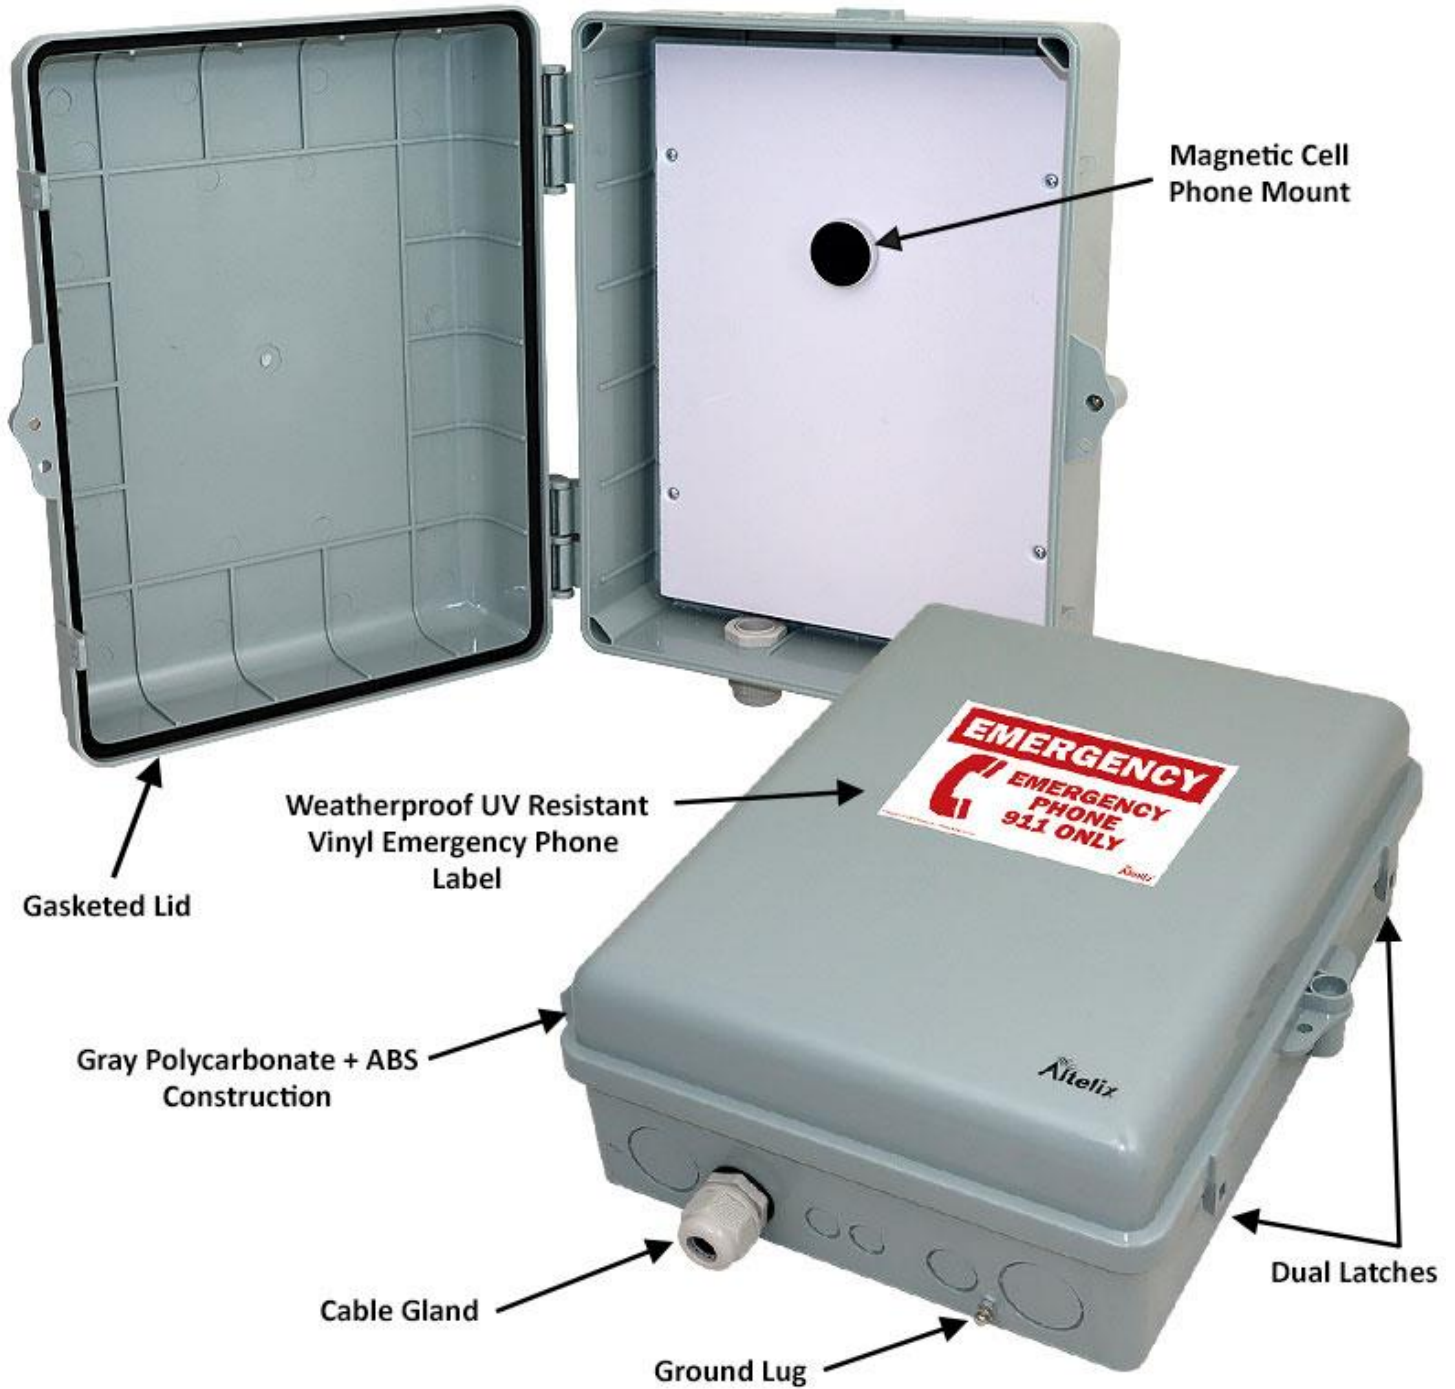

Product Photos

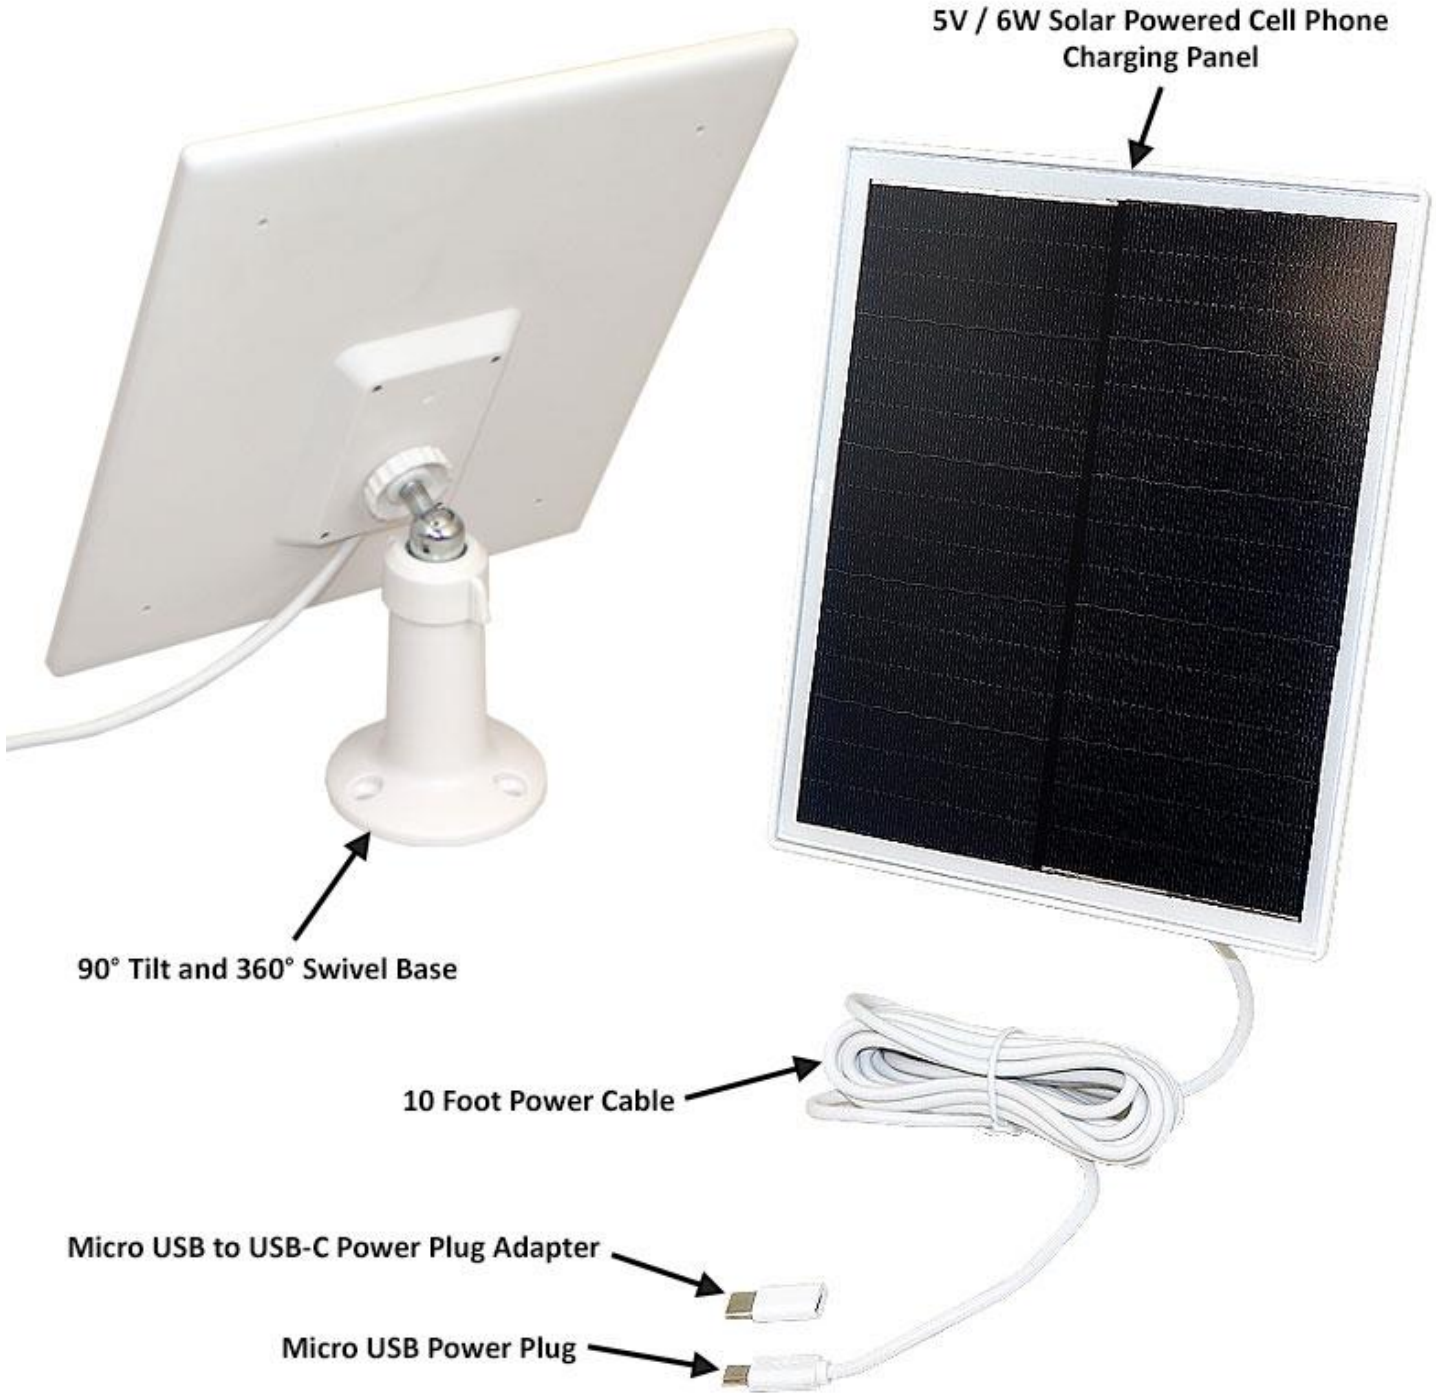

Specifications

Enclosure

Material	Polycarbonate + ABS
Available Colors	Gray, Light Ivory, OD Green
Outer Dimensions	13.4 x 11.5 x 5.0 Inches (340 x 293 x 127 mm)
Inner Dimensions	10.5 x 8.0 x 3.7 Inches (266 x 203 x 94 mm)
Mounting Plate Material	0.25 In. (6.4mm) PVC
Weight	3.3 lbs. (1.5 kg)
Power Cord Length	5 Feet (1.5m)
Ratings	NEMA 1, 2, 3, 3R, 3RX / IP55
Flame Rating	Meets UL94-V0

Solar Power Charger

Output Voltage	5V
Output Current	1.2A
Power Output	6W
Power Cable Length	10 Feet (3.0m)
Power Plugs	Micro-USB and USB-C
Waterproof Rating	IP66

