


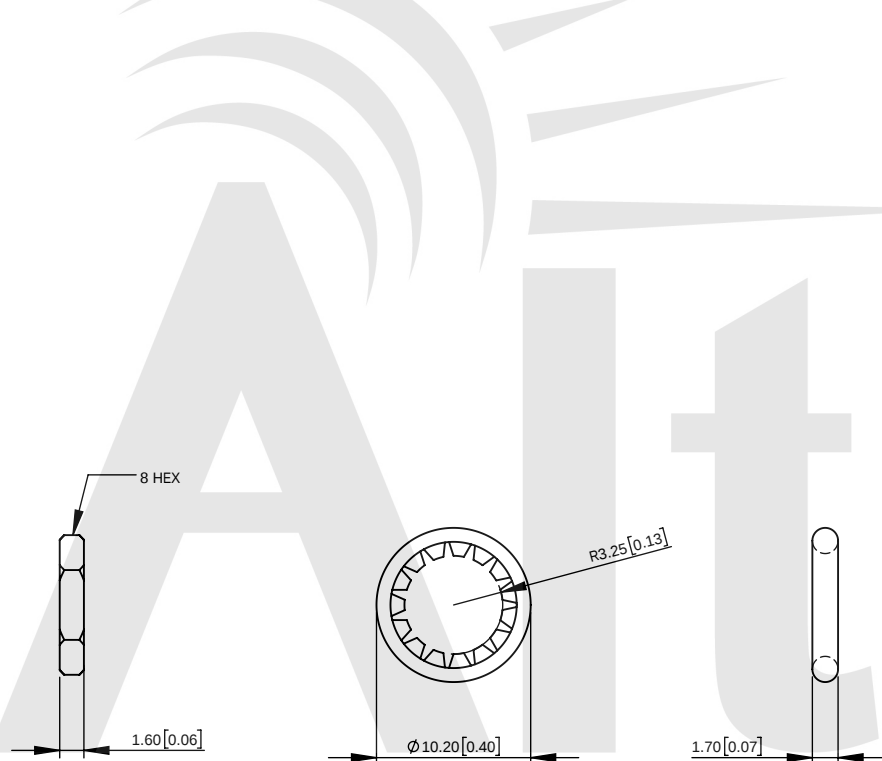
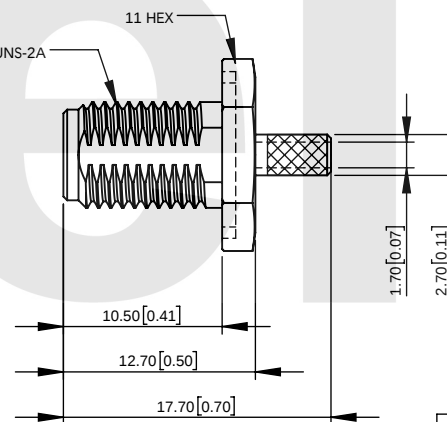


REV	DATE	DESCRIPTION
A	02/27/17	INITIAL RELEASE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ALTILIX LLC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF ALTILIX LLC IS PROHIBITED.

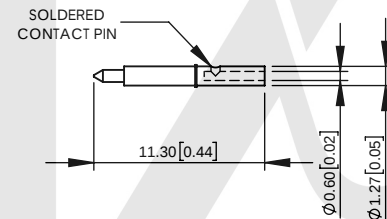

RECOMMENDED
CABLE STRIPPING DIMENSIONS



NO.	DESCRIPTION	MATERIAL	FINISH	QTY.
8	-	-	-	-
7	HEX NUT	BRASS	GOLD	1
6	LOCK WASHER	BRASS	GOLD	1
5	GASKET	SILICONE	-	1
4	FERRULE	BRASS	GOLD	1
3	CONTACT PIN	BRASS	GOLD	1
2	DIELECTRIC	PTFE	-	1
1	SHELL/BODY	BRASS	GOLD	1

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS.
DIMENSIONS IN [] ARE IN INCHES AND
ARE FOR CUSTOMER REFERENCE ONLY.

TOLERANCES FOR MILLIMETERS:
0.5-8mm $\pm$ 0.20mm
8-30mm $\pm$ 0.40mm
30-120mm $\pm$ 0.50mm

TASK	NAME	DATE
DRAWN BY	N.S.C.	02/10/17
CHECKED	-	-
APPROVED	-	-



1201 Clint Moore Road
Boca Raton, FL 33487
PH: 844-866-WIFI
FAX:

PART DESCRIPTION

SMA REVERSE POLARITY BULKHEAD CRIMP PLUG
(100 SERIES, RG-174/188A/316)

PART NUMBER CC100CRSM-1

DRAWING NUMBER DRW-CC100CRSM-1

SCALE: 2:1 REV: A SHEET 1 OF 1