

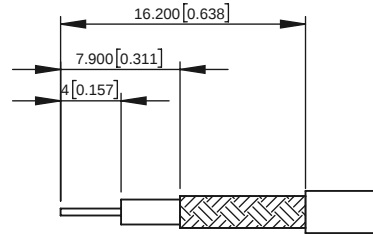
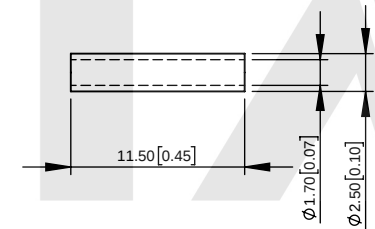
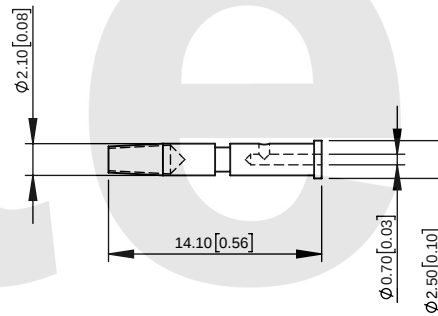


REV	DATE	DESCRIPTION
A	02/27/17	INITIAL RELEASE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ALTILIX LLC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF ALTILIX LLC IS PROHIBITED.

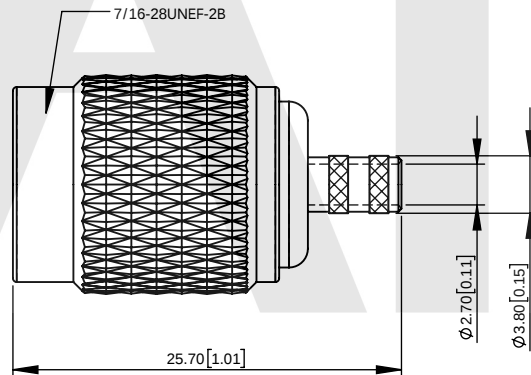

RECOMMENDED CABLE
STRIPPING DIM'S

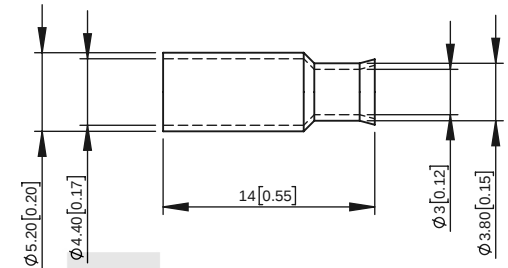

ITEM	DESCRIPTION	MATERIAL	FINISH	QTY.
8	-	-	-	-
7	-	-	-	-
6	-	-	-	-
5	FERRULE	BRASS	NICKEL	1
4	SLEEVE	POM	-	1
3	DIELECTRIC	PTFE	-	1
2	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
1	SHELL/BODY	BRASS	NICKEL	1

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS.
DIMENSIONS IN () ARE IN INCHES AND
ARE FOR CUSTOMER REFERENCE ONLY.

TOLERANCES FOR MILLIMETERS:
0.5-8mm ± 0.20 mm
8-30mm ± 0.40 mm
30-120mm ± 0.50 mm

TASK	NAME	DATE
DRAWN BY	N.S.C.	02/13/17
CHECKED	-	-
APPROVED	-	-

Altelix
www.altelix.com

1201 Clint Moore Road
Boca Raton, FL 33487
PH: 844-866-WIFI
FAX:

PART DESCRIPTION

TNC REVERSE POLARITY CRIMP PLUG
(100 SERIES, RG-174/188/316)

PART NUMBER		CC100CRTM	
DRAWING NUMBER		DRW-CC100CRTM	
SCALE:	2:1	REV:	A
		SHEET 1 OF 1	