



REV	DATE	DESCRIPTION
A	02/27/17	INITIAL RELEASE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ALTILX LLC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF ALTILX LLC IS PROHIBITED.

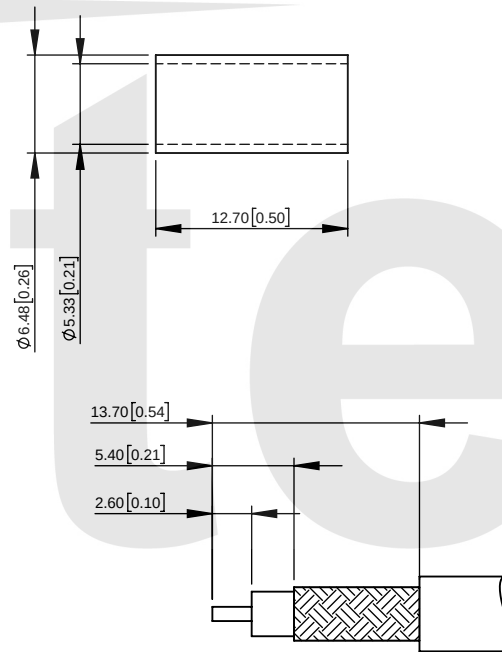

RECOMMENDED CABLE
STRIPPING DIMENSIONS

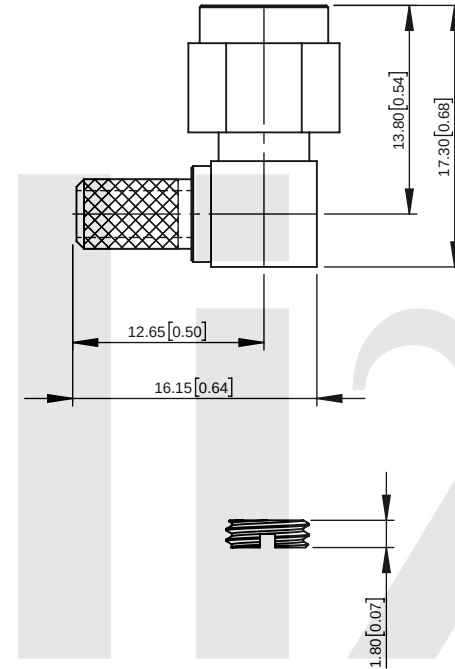

NO.	DESCRIPTION	MATERIAL	FINISH	QTY.
8	-	-	-	-
7	-	-	-	-
6	-	-	-	-
5	FERRULE	BRASS	GOLD	1
4	COVER	BRASS	GOLD	1
3	CONTACT PIN	BRASS	GOLD	1
2	DIELECTRIC	PTFE	-	1
1	SHELL/BODY	BRASS	GOLD	1

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS.
DIMENSIONS IN [] ARE IN INCHES AND
ARE FOR CUSTOMER REFERENCE ONLY.

TOLERANCES FOR MILLIMETERS:
0.5-8mm $\pm$ 0.20mm
8-30mm $\pm$ 0.40mm
30-120mm $\pm$ 0.50mm

TASK	NAME	DATE
DRAWN BY	N.S.C.	02/10/17
CHECKED	-	-
APPROVED	-	-

Altelix 1201 Clint Moore Road
Boca Raton, FL 33487
TEL: 561-660-WIFI
www.altelix.com

PART DESCRIPTION		
SMA REVERSE POLARITY R/A CRIMP PLUG (195 SERIES, RG-58C/58)		
PART NUMBER	CC195CRSM-1	
DRAWING NUMBER	DRW-CC195CRSM-1	
SCALE: 2:1	REV: A	SHEET 1 OF 1