

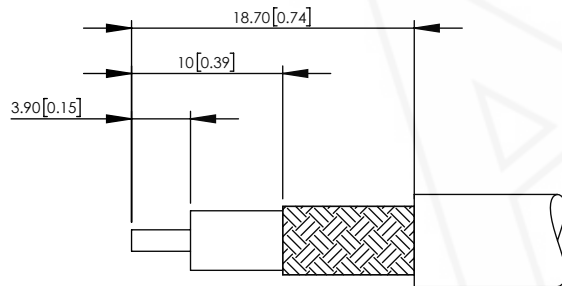
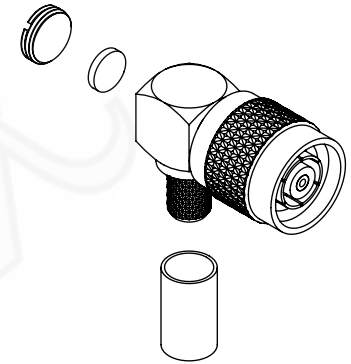


REV	DATE	DESCRIPTION
A	02/27/17	INITIAL RELEASE
B	06/09/17	UPDATED DESIGN

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ALTILIX LLC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF ALTILIX LLC IS PROHIBITED. ALL SPECIFICATIONS SUBJECT TO CHANGE WIHTOUT NOTICE. (C) 2017 ALTILIX LLC.



RECOMMENDED CABLE STRIPPING DIMENSIONS

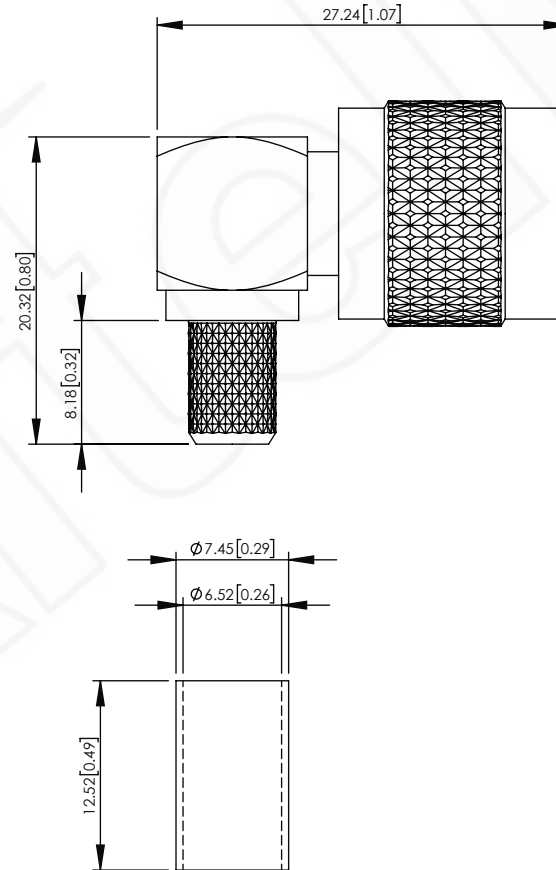

RECOMMENDED FERRULE CRIMP SIZE

NO.	DESCRIPTION	MATERIAL	FINISH	QTY.
8	-	-	-	-
7	-	-	-	-
6	INSULATOR/SPACER	PTFE	-	1
5	FERRULE	BRASS	NICKEL	1
4	COVER	BRASS	NICKEL	1
3	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
2	DIELECTRIC	PTFE	-	1
1	BODY	BRASS	NICKEL	1

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS.
DIMENSIONS IN [] ARE IN INCHES AND
ARE FOR CUSTOMER REFERENCE ONLY.

TOLERANCES FOR MILLIMETERS:
0.5-8mm ± 0.20 mm
8-30mm ± 0.40 mm
30-120mm ± 0.50 mm

TASK	NAME	DATE
DRAWN BY	N. COLUCCI	02/10/17
CHECKED	-	-
APPROVED	-	-

Altelix
www.altelix.com

1201 Clint Moore Road
Boca Raton, FL 33487
TEL: 561-660-WIFI

PART DESCRIPTION

RPTNC-MALE R/A CRIMP CONNECTOR
240 SERIES, RG-8/X

PART NUMBER CC240CRTM-1

DRAWING NUMBER DRW-CC240CRTM-1

SCALE: 2:1 REV: B SHEET 1 OF 1