


REV	DATE	DESCRIPTION
A	02/27/17	INITIAL RELEASE




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ALTELIX LLC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF ALTELIX LLC IS PROHIBITED.



RG-8X
RECOMMENDED CABLE
STRIPPING DIMENSIONS

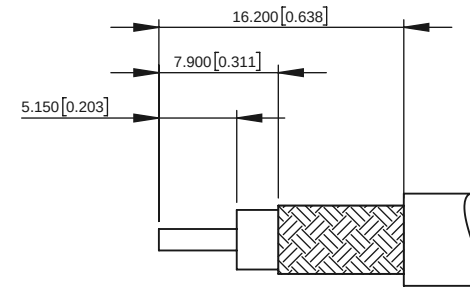

LMR240
RECOMMENDED CABLE
STRIPPING DIMENSIONS

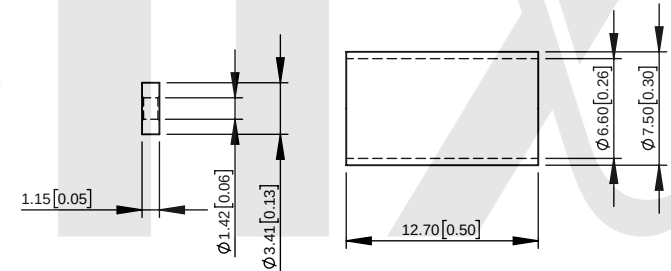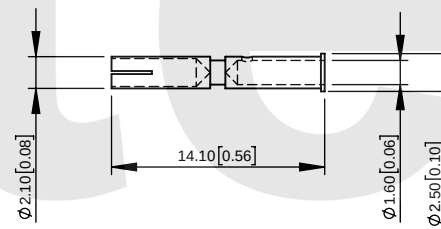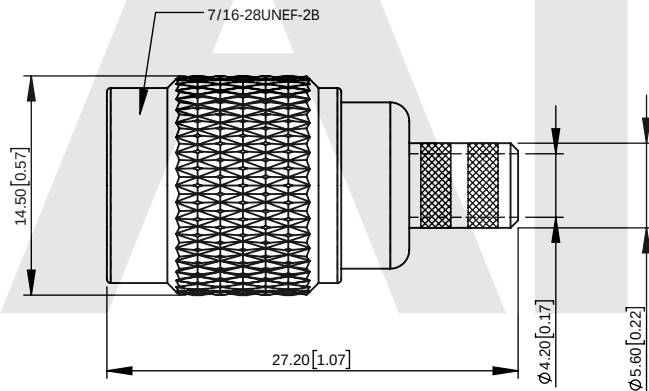

ITEM	DESCRIPTION	MATERIAL	FINISH	QTY.
8	-	-	-	-
7	-	-	-	-
6	-	-	-	-
5	-	-	-	-
4	FERRULE	BRASS	NICKEL	1
3	DIELECTRIC	PTFE	-	1
2	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
1	SHELL/BODY	BRASS	NICKEL	1

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS.
DIMENSIONS IN () ARE IN INCHES AND
ARE FOR CUSTOMER REFERENCE ONLY.

TOLERANCES FOR MILLIMETERS:
0.5-8mm $\pm$ 0.20mm
8-30mm $\pm$ 0.40mm
30-120mm $\pm$ 0.50mm

TASK	NAME	DATE
DRAWN BY	N.S.C.	02/10/17
CHECKED	-	-
APPROVED	-	-

Altelix
www.altelix.com

1201 Clint Moore Road
Boca Raton, FL 33487
TEL: 561-660-WIFI

PART DESCRIPTION

TNC REVERSE POLARITY CRIMP PLUG
(240 SERIES, RG-8X)

PART NUMBER CC240CRTM

DRAWING NUMBER DRW-CC240CRTM

SCALE: 2:1 REV: A SHEET 1 OF 1