
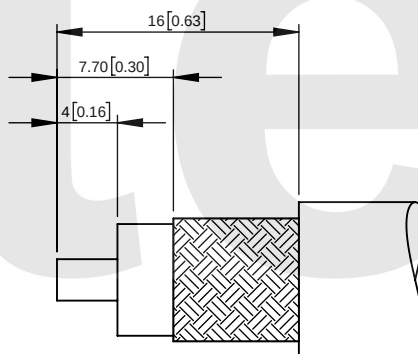
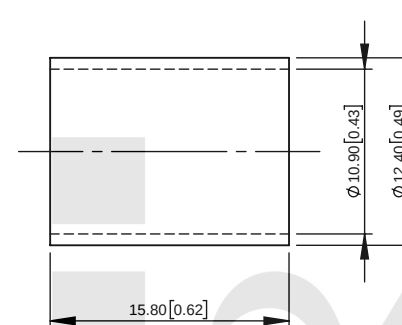
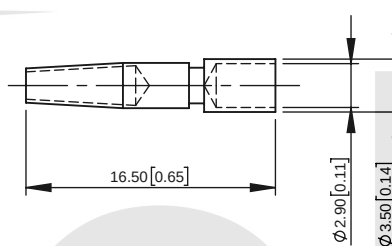


REV	DATE	DESCRIPTION
A	02/27/17	INITIAL RELEASE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ALTILIX LLC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF ALTILIX LLC IS PROHIBITED.

5/8-24UNEF-2A

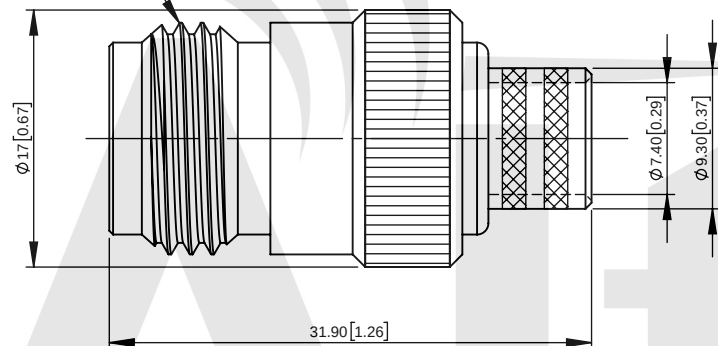

RECOMMENDED CABLE
STRIPPING DIMENSIONS

NO.	DESCRIPTION	MATERIAL	FINISH	QTY.
8	-	-	-	-
7	-	-	-	-
6	-	-	-	-
5	-	-	-	-
4	FERRULE	BRASS	NICKEL	1
3	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
2	DIELECTRIC	PTFE	-	1
1	SHELL/BODY	BRASS	NICKEL	1

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS.
DIMENSIONS IN [] ARE IN INCHES AND
ARE FOR CUSTOMER REFERENCE ONLY.

TOLERANCES FOR MILLIMETERS:
0.5-8mm $\pm$ 0.20mm
8-30mm $\pm$ 0.40mm
30-120mm $\pm$ 0.50mm

TASK	NAME	DATE
DRAWN BY	N.S.C.	02/10/17
CHECKED	-	-
APPROVED	-	-

Altelix
www.altelix.com

1201 Clint Moore Road
Boca Raton, FL 33487
TEL: 561-660-WIFI

PART DESCRIPTION

**N CRIMP JACK
(400 SERIES)**

PART NUMBER CC400CNF

DRAWING NUMBER DRW-CC400CNF

SCALE: 2:1 REV: A SHEET 1 OF 1