

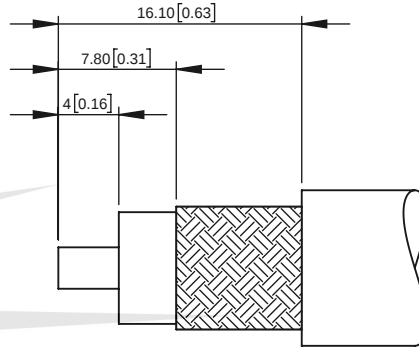
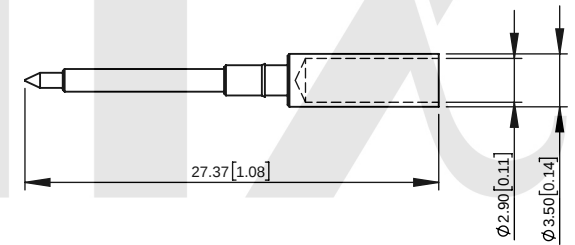


REV	DATE	DESCRIPTION
A	02/27/17	INITIAL RELEASE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ALTILIX LLC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF ALTILIX LLC IS PROHIBITED.

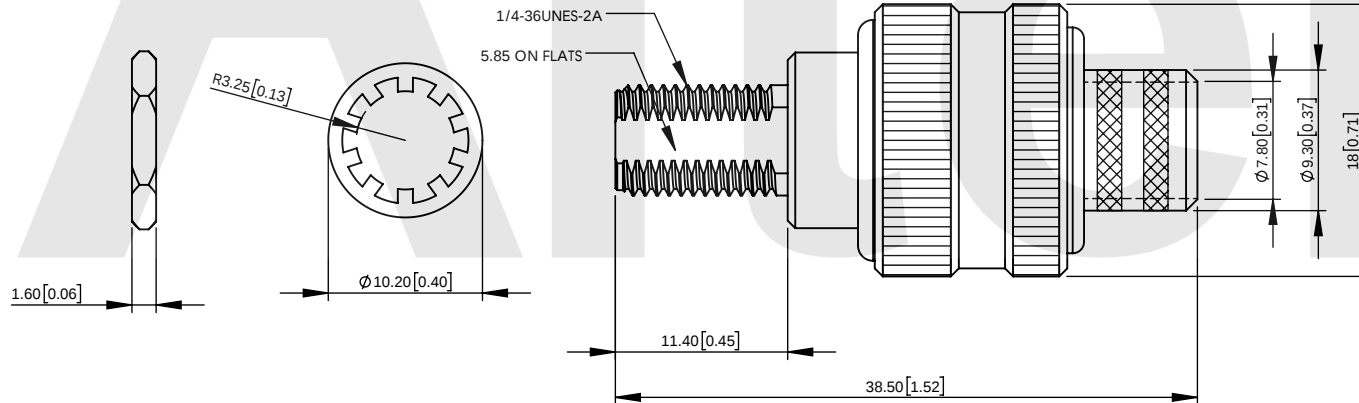

RECOMMENDED CABLE STRIPPING DIMENSIONS

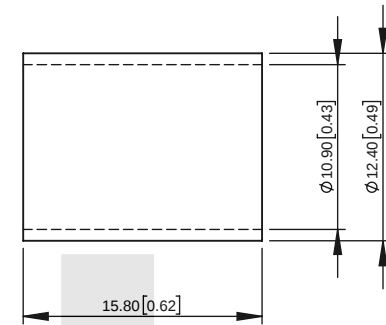

NO.	DESCRIPTION	MATERIAL	FINISH	QTY.
8	-	-	-	-
7	-	-	-	-
6	HEX NUT	BRASS	NICKEL	1
5	LOCK WASHER	BRASS	NICKEL	1
4	FERRULE	BRASS	NICKEL	1
3	CONTACT PIN	BRASS	GOLD	1
2	DIELECTRIC	PTFE	-	1
1	SHELL/BODY	BRASS	NICKEL	1

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS.
DIMENSIONS IN [] ARE IN INCHES AND
ARE FOR CUSTOMER REFERENCE ONLY.

TOLERANCES FOR MILLIMETERS:
0.5-8mm $\pm$ 0.20mm
8-30mm $\pm$ 0.40mm
30-120mm $\pm$ 0.50mm

TASK	NAME	DATE
DRAWN BY	N.S.C.	02/13/17
CHECKED	-	-
APPROVED	-	-

Altelix
www.altelix.com

1201 Clint Moore Road
Boca Raton, FL 33487
TEL: 561-660-WIFI

PART DESCRIPTION
SMA REVERSE POLARITY BULKHEAD CRIMP JACK
(400 SERIES, BELDEN 9913/9914)

PART NUMBER CC400CRSF-1

DRAWING NUMBER DRW-CC400CRSF-1

SCALE: 2:1 REV: A SHEET 1 OF 1