



WARNING: READ ALL INSTRUCTION BEFORE USE. THIS ENCLOSURE IS DESIGNED TO BE INSTALLED BY A TRAINED PROFESSIONAL INSTALLER.

Hardware Included




The hardware kit included contains both concrete anchors and wood screws for wall mounting. The rear mounting holes of the NHBS-RACK-V4U are spaced to mount to standard 16" stud spacing found in most wall construction.

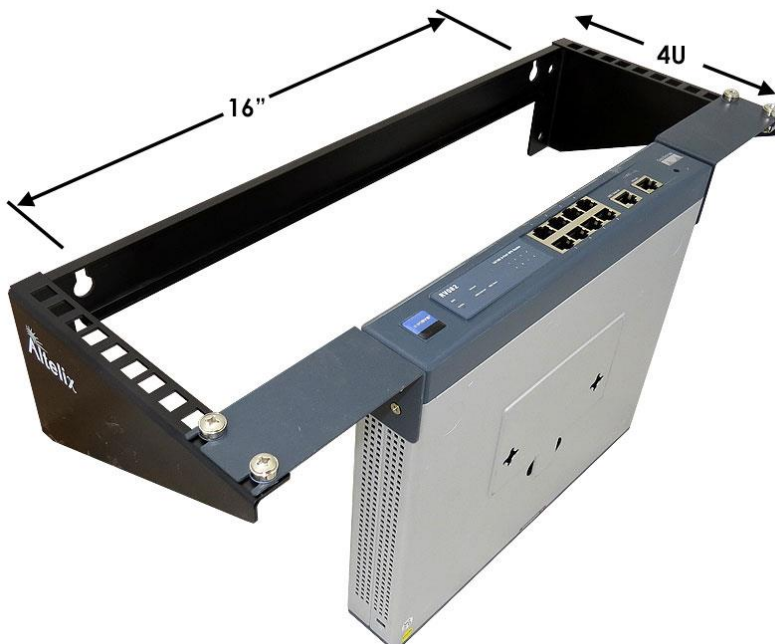

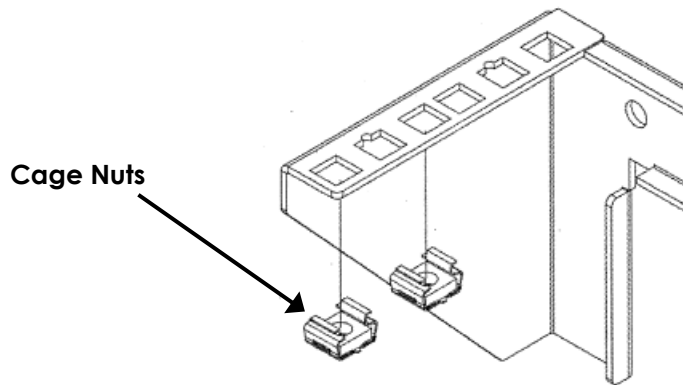

1. Install M6 Cage Nuts into the square openings to provide an attachment point for the M6 Mounting Screws.
 - a. From inside of the Mounting Rails, insert one of the flanges of the cage nut through the square opening. Press against the side of the square opening.
 - b. Compress the cage nut at the sides slightly to allow the remaining flange to fit through the square opening. When the cage nut is properly installed, both flanges will protrude through the square opening and will be visible on the outer surface of the mounting rail.

Repeat steps 1a and 1b until all required cage nuts are installed.

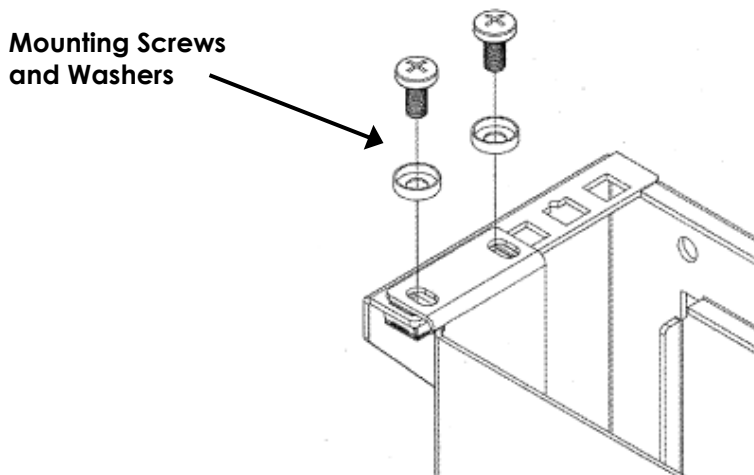

2. After installing the required cage nuts, use the included M6 Mounting Screws and M6 Washers to secure your equipment.

Note: 19" 4U vertical bracket can hold up to 44 lbs. evenly distributed.

Got Questions?
We are here to help.
Contact us at:



sales@altelix.com



USA & Canada Customers: 866-660-9434
International Customers: +1 561-660-9434