

Altelix Vented Weatherproof Enclosure for Amazon eero® 6+ Mesh Wi-Fi 6 Router with 120VAC Outlet and Power Cord



Amazon eero® 6+ and Ethernet Cable Not Included

Features

- Designed to fit the Amazon eero® 6+ (Model R010011) Mesh Wi-Fi 6 Router
- Plug-and-Play design, easy to install
- Dual 3" Vents with rain shields and screens
- RF transparent design will not affect wireless signal range or coverage pattern
- Pre-wired 120VAC power outlet and pre-wired 5 foot 3-prong power cord
- Weatherproof and UV stable durable Polycarbonate + ABS construction
- Gasketed lid with tamper-proof locking screw
- NEMA Type 3R, 3RX / IP24 Rated
- Includes wall mount hardware and cable grommets

Amazon eero® is a trademark or registered trademark of Amazon Technologies, Inc.

Description

The **Altelix NP14VFA1C-EER4** is a vented weatherproof enclosure designed to provide added security, vandalism and protection from harsh environments, while allowing ventilation for the Amazon eero® 6+ Wi-Fi mesh router. It features two 3" inch air vents with rain shields and screens.

Install Your Amazon eero® 6+ Securely

This sleek enclosure is molded out of UV resistant Polycarbonate + ABS, an industrial grade plastic with greater strength and durability than standard ABS. It features a gasketed hinged door with dual latches, a stainless-steel security screw and provision for padlock. Integrated mounting feet simplify installation. It meets or exceeds NEMA 3, 3R, 3RX and IP55.

Amazon eero® 6+ Wi-Fi Mesh Router Mount

The NP14VA1C-EER4 features a mounting cradle specifically designed for the Amazon eero® 6+ router. Installation is easy, simply slide the router into the mounting cradle. For extra security and installations subject to vibrations, an optional hook and loop strap is provided to secure the router within the mounting cradle. The mounting cradle is designed so that it will not interfere with any of the ports on the eero® 6+ such as power and Ethernet.

Plug and Play Setup

The NP14VA1C-EER4 enclosure provides easy plug-n-play installation. Once the router is securely mounted inside the enclosure, connect its power supply to the internal 120VAC power outlet. A cable gland and cable grommets on the enclosure allow cables to be connected to the device. Simply plug the enclosure's 5 foot power cord into a power outlet and you are up and running.

RF Transparent Design

The non-metallic design of the enclosure and bracket is RF transparent and will not interfere with the WiFi signal range or coverage pattern.


Complete with Cable Grommets and Glands and Wire Management Straps

For convenience, the included accessory kit contains cable grommets and glands, wall anchors, zip ties, hook-and-loop wire management straps, door locking key and more.

Mounting

The enclosure can be wall mounted using the included wall anchors. An optional pole mount kit is also available for installation on poles up to 8 inches in diameter.

Product Photos

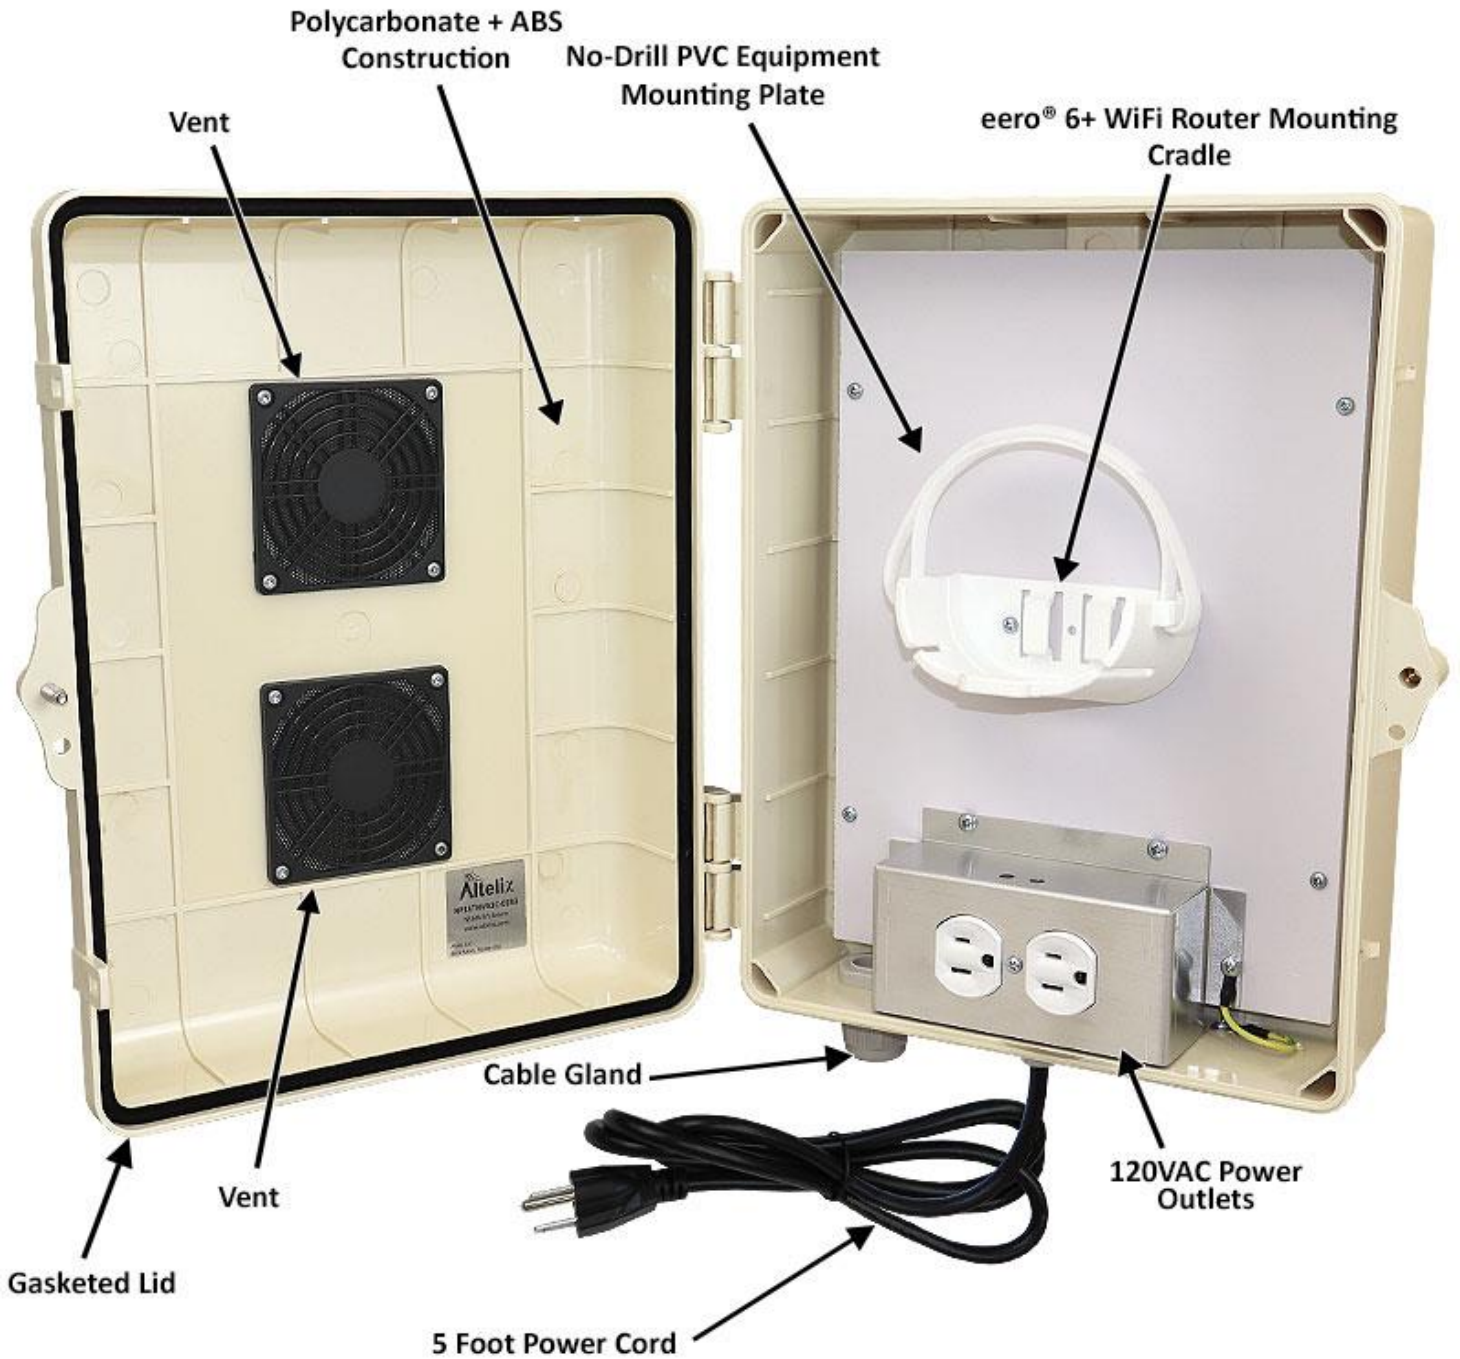

Product Photos



Specifications

Material	PC+ABS Polycarbonate / ABS Blend
Color	Gray, Black, Light Ivory, OD Green
Voltage	120VAC
Max Load	10A @ 120V
Outer Dimensions (Height x Width x Depth)	13.4 x 11.5 x 6.3 Inches (340 x 293 x 160 mm)
Inner Dimensions (Height x Width x Depth)	9.5 x 8.0 x 3.2 Inches (241 x 203 x 81 mm)
Mounting Plate Material	0.25 in (6.4 mm) PVC
Weight	4.1 lbs. (1.8 kg)
Power Cord Length	5 Feet (1.5m)
Ratings	NEMA Type 3R, 3RX / IP24
Flame Rating	Meets UL94-V0
Compatible eero® Model	eero® 6+ Mesh Wi-Fi Router (Model R010011)

Available Colors

