



Amazon Ring® Security Base Station Not Included

Features

- Designed to fit Amazon Ring® Security Base Station (Model 4HB1S70ENO)
- Plug-n-Play Design, Easy to Install
- Dual 3" Vents with Rain Shields to Expel Heat
- Features a RF Transparent Non-Metallic Equipment Mounting Plate
- ABS + Polycarbonate Construction
- Gasketed Lid with Tamper-Proof Locking Screw and Dual Door Latches
- RF Transparent PVC Non-Metallic Equipment Mounting Plate
- Pre-Wired 120VAC Outlet with 5 Foot Power Cord
- NEMA Type 3R, 3RX / IP24 Rated
- Includes Wall Mount Hardware and Cable Management Straps

Amazon Ring® is a trademark or registered trademark of Amazon Technologies, Inc

Description

The Altelix Ring Security Base Station Enclosure is a vented weatherproof enclosure designed to provide added security from vandalism and protection from harsh environments, while allowing ventilation for the Amazon Ring® Alarm Pro Base Station. It features two 3" inch air vents with rain shields and screens.

Plug and Play Setup

This Altelix enclosure provides easy plug-n-play installation. Once the enclosure is mounted, install Amazon Ring® Security Base Station into the mounting cradle and plug its power supply into the pre-wired 120VAC power outlet. Then plug the enclosure's 5 foot power cord into a 120VAC power outlet and you are up and running.

RF Transparent Design

The non-metallic design of the enclosure and equipment mounting plate is RF transparent and will not interfere with the wireless signal range or coverage pattern of the Amazon Ring® Security Base Station.

Rugged Polycarbonate + ABS Construction

This sleek enclosure is molded out of UV resistant Polycarbonate + ABS, an industrial grade plastic with greater strength and durability than standard ABS. It features a gasketed hinged door with dual latches, a stainless steel security screw and provision for padlock. Integrated mounting feet simplify installation. It meets or exceeds NEMA 3R, 3RX and IP24.


Complete with Cable Grommets and Glands and Wire Management Straps

For convenience, the included accessory kit contains cable grommets and glands, wall anchors, zip ties, hook-and-loop wire management straps, door locking key and more. A pre-installed cable grommet is available if any additional cables need to be installed in the enclosure.

Mounting

The enclosure can be wall mounted using the included wall anchors. An optional pole mount kit is also available for installation on poles up to 8 inches in diameter.

Product Photos

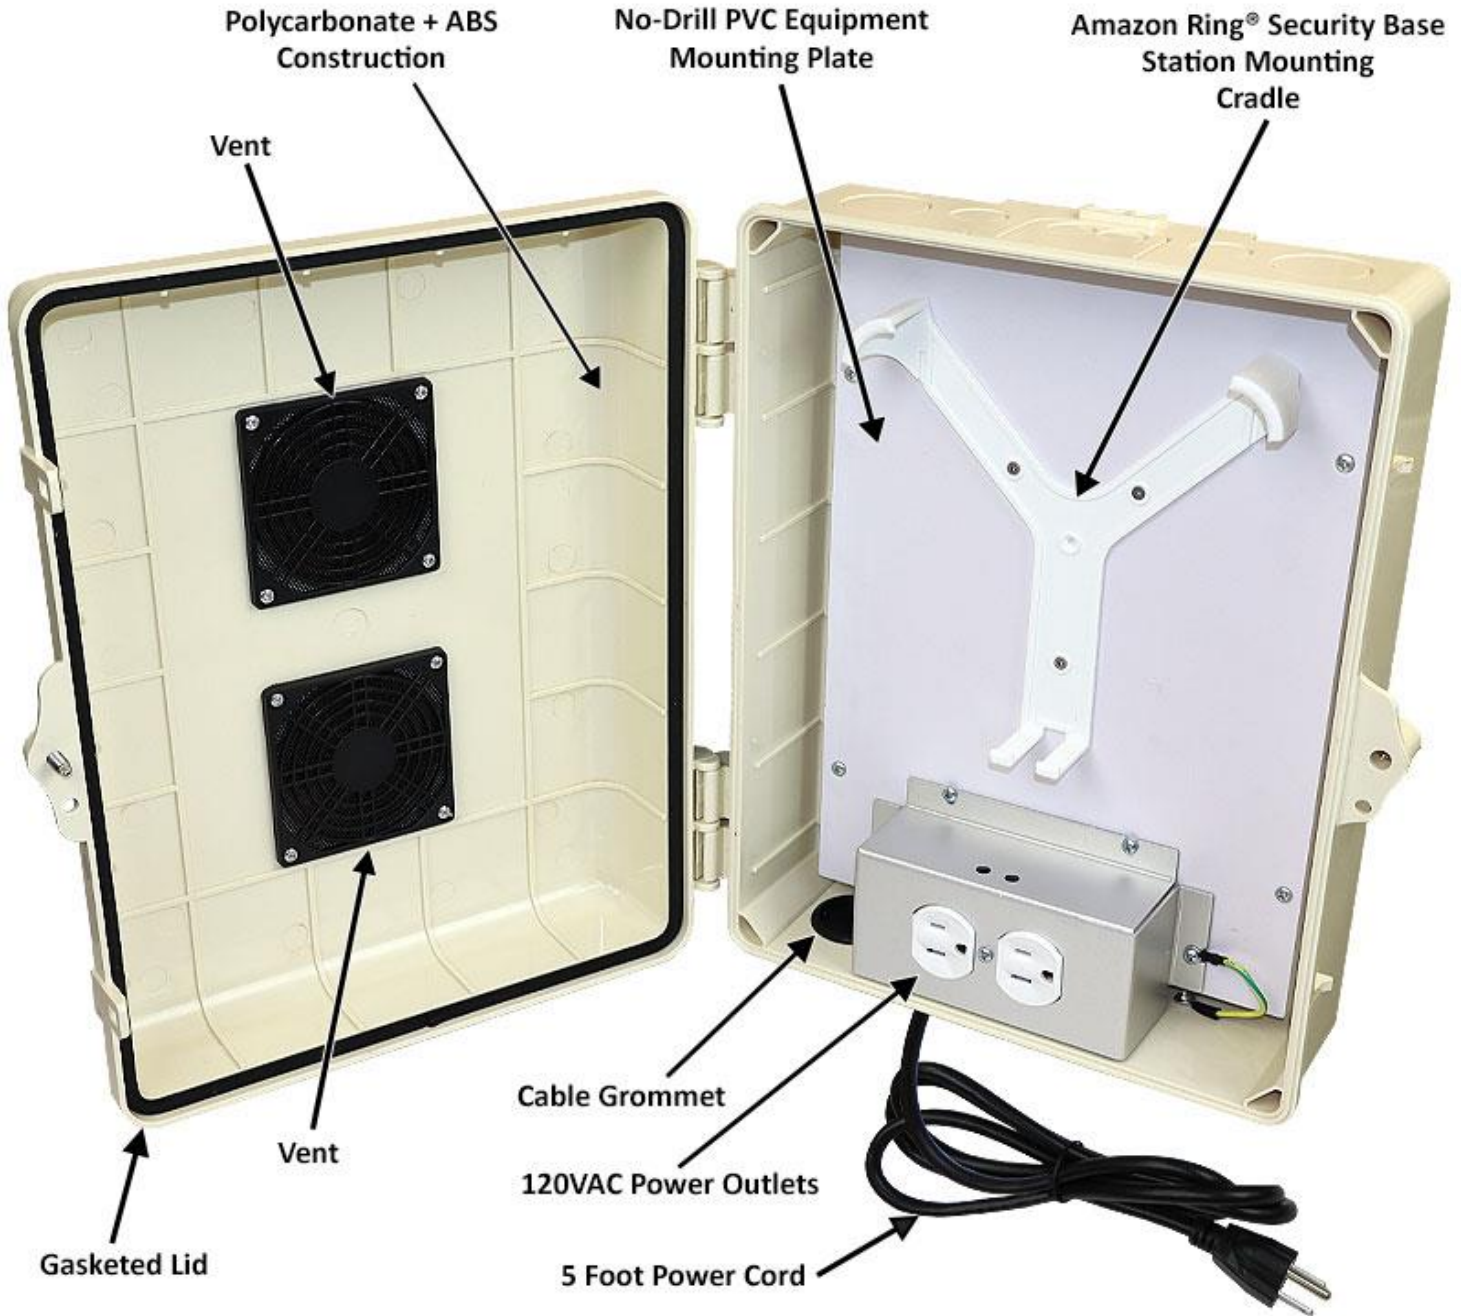

Product Photos





Specifications

Material	Polycarbonate + ABS
Available Colors	See Below
Voltage / Max Load	120VAC / 10A @ 120V
Outer Dimensions (Height x Width x Depth)	13.4 x 11.5 x 6.3 Inches (340 x 293 x 160 mm)
Mounting Plate Material	0.25 In. (6.4mm) PVC
Weight	4.1 lbs. (1.8 kg)
Power Cord Length	5 Feet (1.5m)
Ratings	NEMA Type 3R, 3RX / IP24
Flame Rating	Meets UL94-V0
Compatible Ring® Model	Amazon Ring® Security Base Station (Model 4HB1S70ENO)


NP14TNVMA1C-RAL1
NP14TGYVMA1C-RAL1
NP14GNVMA1C-RAL1
NP14BKVMA1C-RAL1

Accessories

Model		Description
NMKG-240-08	 The image shows a silver metal enclosure with two metal brackets attached to its top and bottom edges. Each bracket consists of a flat base with a curved, hook-like top section, designed to wrap around a pole.	The Altelix NMKG-240-08 Pole Mount Kit easily attaches to the enclosure. This pole mount kit allows the enclosures to be mounted to poles up to 7.6 inches in diameter. The mounting brackets are constructed from 0.04" (1mm) thick galvanized steel for all weather applications.
HN-0004	 The image shows a small, silver metal key. It has a rounded, D-shaped head and a short, cylindrical shaft with a slightly tapered end.	Replacement door locking key.