
NF100806VP



10x8x6 Vented Fiberglass Weatherproof NEMA Enclosure with Aluminum Equipment Mounting Plate

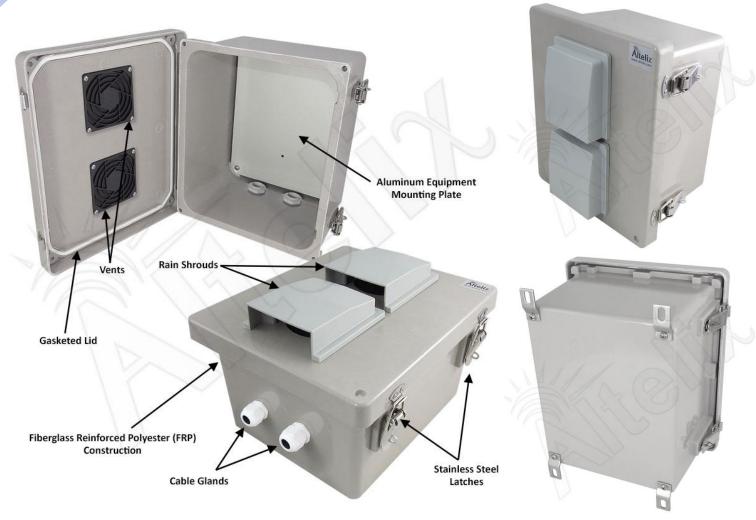

Features

- (2) 3" Vents with Rain Shields and Screens
- Includes Easy to Drill Blank Aluminum Equipment Mounting Plate
- Stainless Steel Hinge and Quick Release Latches with Padlock Hasps
- Fiberglass Reinforced Polyester, FRP
- Weatherproof, UV Stable and Highly Corrosion Resistant
- NEMA 3R, 3RX / IP24 Rated
- Includes Cable Glands and Stainless Steel Mounting Feet
- RF Transparent Enclosure
- Pole Mounting Kit Available



Description

The **Altelix NF100806VP** Vented NEMA enclosure is ideal for protecting equipment from harsh environments and tampering while allowing ventilation for installed equipment or batteries.

Aluminum Equipment Mounting Plate

This enclosure features an easy to drill aluminum equipment mounting plate. The enclosure and plate can be drilled and modified by the installer to suit unique site requirements.

Vented NEMA Enclosure

This enclosure features two 3 inch air vents covered by rain shields, allowing ventilation of installed equipment or batteries while maintaining waterproof protection.

Extreme Protection Built to Last

This rugged JIC style NEMA box is molded from durable UV stable and corrosion resistant fiberglass reinforced polyester (FRP) with a UL94-5V flame rating. The FRP material is dent-proof, non-conductive and RF transparent for compatibility with wireless equipment. It can be easily drilled and modified by the installer as needed. It features a gasketed door with stainless steel continuous hinge and stainless-steel quick release latches with padlock hasps.

Cable Glands

The enclosure features two unique PG-16 cable glands with a closed inner seal. It is installed in the open port to maintain the NEMA rating of the enclosure when not in use. When required for use, simply punch a hole through the inner membrane, run your cables and tighten for a water-tight seal.

Mounting

Stainless steel brackets are included for secure wall mounting. Optional flange and pole mounting kits are also available.

Specifications

Material	Fiberglass Reinforced Polyester
Color	Gray
Outer Dimensions (Height x Width x Depth)	11.7 x 9.9 x 7.8 ln. (298 x 251 x 199 mm)
Inner Dimensions* (Height x Width x Depth)	9.0 x 7.0 x 5.5 In. (228 x 177 x 139 mm)
Mounting Plate Material	0.10 in. (2.5mm) Aluminum
Mounting Plate Dimensions	9.1 x 7.4 in. (231 x 188 mm)
Weight	6.6 lbs. (3.0 kg)
Ratings	NEMA Type 3R, 3RX / IP24
Industry Certifications	CE

^{*}Interior dimensions represent maximum space available for equipment.